

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		K	REVISED PER ECO-11-006478	30MAR2011	CJV	CWR

D

C

B



A

D

C


B

A

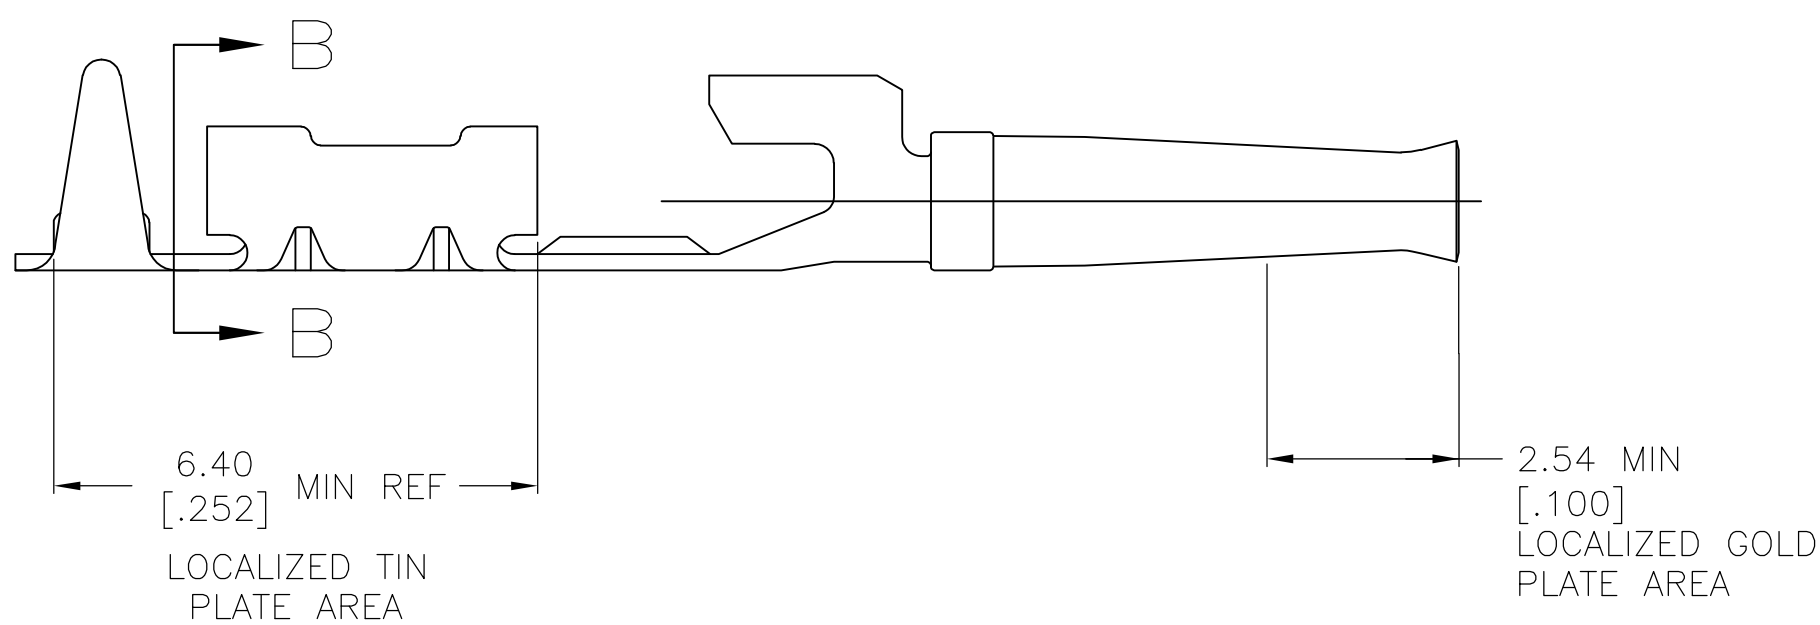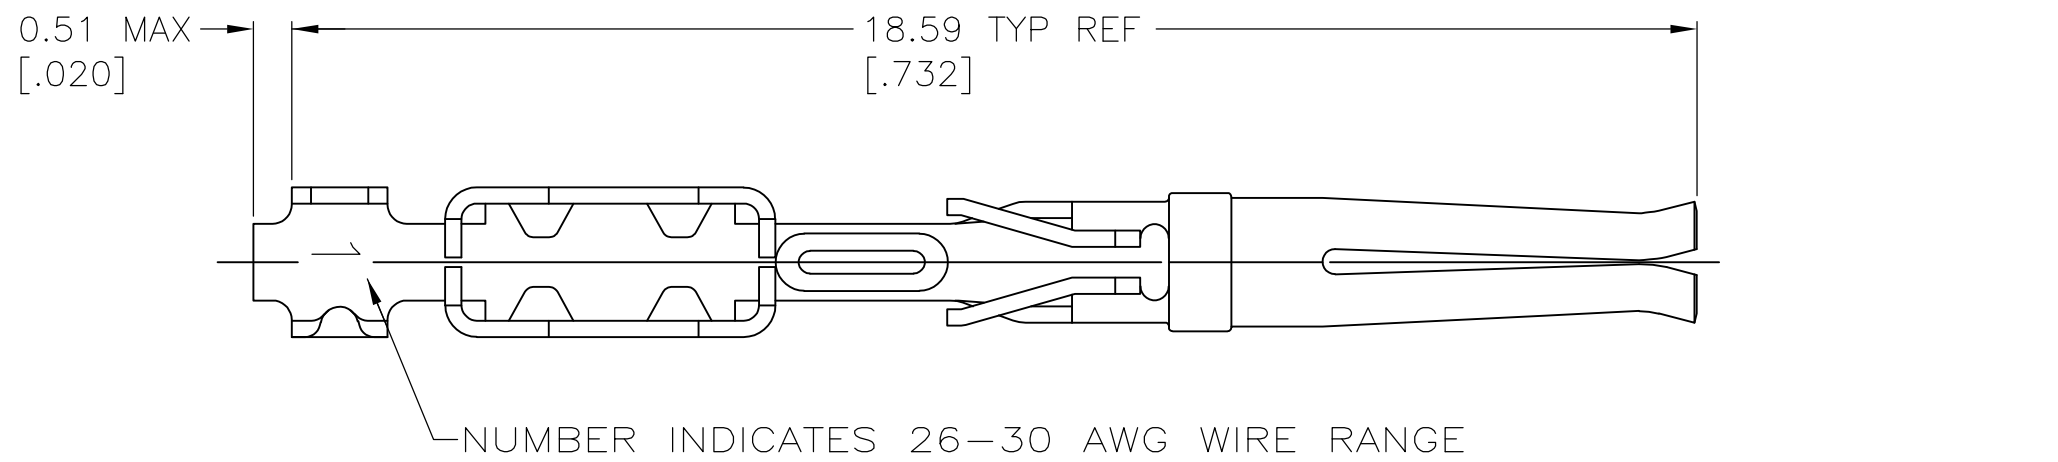

SECTION B-B

- 1 GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
- 2 0.76μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54μm [.000100] MIN BRIGHT TIN OR BRIGHT TIN-LEAD IN MIN LOCALIZED TIN PLATE AREA, ALL OVER 0.76μm [.000030] MIN NICKEL.
- 3 GOLD FLASH IN LOCALIZED GOLD PLATE AREA, 2.54μm [.000100] MIN BRIGHT TIN OR BRIGHT TIN-LEAD IN MIN LOCALIZED TIN PLATE AREA, ALL OVER 0.76μm [.000030] MIN NICKEL.
4. MAX INSULATION OD = .060.
- 5 0.76μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54μm [.000100] MIN MATTE TIN IN MIN LOCALIZED TIN PLATE AREA, ALL OVER 0.76μm [.000030] MIN NICKEL.

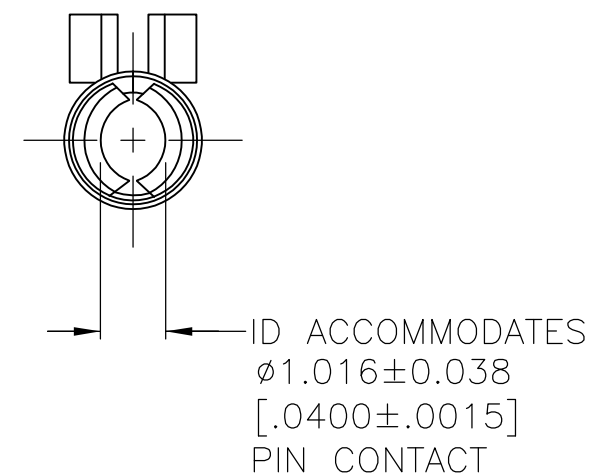

OBSOLETE	5	745931-8
	3	745931-5
	2	745931-3
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN C. RICHARD 03/19/90	 TE Connectivity					
DIMENSIONS: INCHES			CHK W. LENKER 3-22-90						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	NAME CONTACT SOCKET, MASS TERMINATION, #26-30, HDE-20, AMPLIMITE					
	0 PLC ± —		PRODUCT SPEC —						
	1 PLC ± —		—						
	2 PLC ± 0.13 [.005]		APPLICATION SPEC —						
	3 PLC ± —		—						
4 PLC ± —		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL PHOSPHOR BRONZE PER QQ-B-750		FINISH 	WEIGHT —	A2	00779	G-745931	—		
CUSTOMER DRAWING				SCALE	10:1	SHEET	1 of 1	REV	K

745931