

Current Regulator Diodes

1N5283UR-1–1N5314UR-1, 1N7048UR-1–1N7055UR-1



Product Overview

The popular 1N5283UR-1 and 1N7048UR series of 0.5 watt current regulators provides a selection from 0.22 mA to 10.0 mA in standard 10% tolerances. These devices regulate current over a broad voltage range as a counter part offering to Zeners (that regulate voltage over a broad current range). The DO-213AB Package offers a double plug internal bond connection with a large die element for its unique functions as a current regulator. Microchip also offers numerous other Zener products to meet higher and lower power voltage regulation applications.

Figure 1. DO-213AB (MELF, LL41) Package



Also available in:

DO-7 Package (axial-leaded)

[1N5283-1 to 1N5314-1](#)

Features

- JEDEC registered surface mount equivalent of 1N5283 thru 1N5314 series and 1N7048UR-1 thru 1N7055UR-1
- Leadless package for surface mount
- High source impedance
- Internal metallurgical bond
- JAN, JANTX, JANTXV, and JANS qualifications available per MIL-PRF-19500/463
- Chips also available as JANHC and JANKC
- RoHS compliant versions available (commercial grade only).

Applications/Benefits

- Double-plug construction
- Regulates current over a broad operating voltage and temperature range
- Extensive selection from 0.22 mA to 10.0 mA
- Standard current tolerances are plus/minus 10%.
- Nonsensitive to ESD
- Inherently radiation hard as described in Microchip [MicroNote 050](#)

1. Maximum Ratings

Table 1-1. Maximum Ratings at 25 °C Unless Otherwise Noted ¹

Parameters/Test Conditions	Symbol	Value	Unit
Junction and storage temperature	T_J and T_{STG}	-65 to +150	°C
Thermal resistance, junction-to-end cap at L = 0 inch	$R_{\theta JEC}$	100	°C/W
Thermal impedance	$Z_{\theta JX}$	25	°C/W
Steady-State power dissipation at $T_{EC} = +125$ °C ¹	P_D	500	mW
Working peak voltage	V_{WM}	100	V
Solder temperature at 10 seconds maximum	T_{SP}	260	°C

Note:

- Derate at 10 mW/°C above +125 °C.

1.1 Mechanical and Packaging

- Case: Hermetically sealed glass case
- Terminals: Tin/lead finished copper clad steel or RoHS compliant matte-tin finish available (commercial grade only).
- Marking: Cathode band
- Polarity: Diode to be operated with the banded (cathode) end negative
- Mounting surface selection: The Axial Coefficient of Expansion (COE) of this device is approximately +6 PPM/°C. The COE of the mounting surface system should be selected to provide a suitable match with this device.
- Tape and reel optional: Standard per EIA-481-1-A with 12 mm tape. Consult factory for quantities.
- Weight: 0.2 grams
- See [Package Dimensions](#).

2. Part Nomenclature

Figure 2-1. Part Nomenclature



2.1 Symbols and Definitions

Table 2-1. Symbols and Definitions

Symbol	Definition
I_L	Limiting current: A specified current below the lower knee of the current-regulating characteristic.
I_S	Regulator current: A current within the regulating range of a current-regulator diode.
P_D	Power dissipation: the power dissipation, dc.
$R_{\theta JL}$	Thermal resistance junction-to-lead: The thermal resistance from the virtual junction(s) of a semiconductor device to the lead.
T_L	Lead temperature: the temperature of a lead terminal.
T_{SP}	Temperature solder pad: The maximum solder temperature that can be safely applied to the terminal.
V_K	Knee voltage: A specified regulator voltage near the lower knee of the current-regulating characteristic.
V_L	Limiting voltage: The voltage at point I_L on the current-voltage characteristic.
V_S	Regulator Voltage: A voltage within the regulating range of a current-regulating diode.
Z_K	Knee impedance: the small-signal impedance at operating point V_K on the current-voltage characteristic.
Z_S	Regulator Impedance: the small-signal impedance within the regulating range of a current-regulator diode.
$Z_{\theta JX}$	Thermal Impedance; The thermal impedance junction to reference point.

3. Electrical Characteristics

Table 3-1. Electrical Characteristics at 25 °C Unless Otherwise Stated

Type Number	Regulator Current I_P (mA) at $V_S = 25V$ ¹			Minimum Regulator Impedance at $V_S = 25$ Z_S (M Ω) ²	Minimum Knee Impedance at $V_K = 6.0V$ Z_K (M Ω) ³	Maximum Limiting Voltage at $I_L = 0.8 I_P$ (min) V_L (volts)	Peak Operating Voltage Volts
	Nom.	Min.	Max.				
1N5283UR-1	0.22	0.198	0.242	25.00	2.750	1.00	100
1N5284UR-1	0.24	0.216	0.264	19.00	2.350	1.00	
1N5285UR-1	0.27	0.243	0.297	14.00	1.950	1.00	
1N5286UR-1	0.30	0.270	0.330	9.000	1.600	1.00	
1N5287UR-1	0.33	0.297	0.363	6.600	1.350	1.00	
1N5288UR-1	0.39	0.351	0.429	4.100	1.00	1.05	100
1N5289UR-1	0.43	0.387	0.473	3.300	0.870	1.05	
1N5290UR-1	0.47	0.423	0.517	2.700	0.750	1.05	
1N5291UR-1	0.56	0.504	0.616	1.900	0.560	1.10	
1N5292UR-1	0.62	0.558	0.682	1.550	0.470	1.13	
1N5293UR-1	0.68	0.612	0.748	1.350	0.400	1.15	100
1N5294UR-1	0.75	0.675	0.825	1.150	0.335	1.20	
1N5295UR-1	0.82	0.738	0.902	1.000	0.290	1.25	
1N5296UR-1	0.91	0.819	1.001	0.880	0.240	1.29	
1N5297UR-1	1.0	0.900	1.100	0.800	0.205	1.35	
1N5298UR-1	1.10	0.990	1.210	0.700	0.180	1.40	100
1N5299UR-1	1.20	1.080	1.320	0.640	0.155	1.45	
1N5300UR-1	1.30	1.170	1.430	0.580	0.135	1.50	
1N5301UR-1	1.40	1.260	1.540	0.540	0.115	1.55	
1N5302UR-1	1.50	1.350	1.650	0.510	0.105	1.60	
1N5303UR-1	1.60	1.440	1.760	0.475	0.092	1.65	100
1N5304UR-1	1.80	1.620	1.980	0.420	0.074	1.75	
1N5305UR-1	2.00	1.800	2.200	0.395	0.061	1.85	
1N5306UR-1	2.20	1.980	2.420	0.370	0.052	1.955	
1N5307UR-1	2.40	2.160	2.640	0.345	0.044	2.00	
1N5308UR-1	2.70	2.430	2.970	0.320	0.035	2.15	100
1N5309UR-1	3.00	2.700	3.300	0.00	0.029	2.25	
1N5310UR-1	3.30	2.970	3.630	0.280	0.024	2.35	
1N5311UR-1	3.60	3.240	3.960	0.265	0.020	2.50	
1N5312UR-1	3.90	3.510	4.290	0.255	0.017	2.60	
1N5313UR-1	4.30	3.870	4.730	0.245	0.014	2.75	100
1N5314UR-1	4.70	4.230	5.170	0.235	0.012	2.90	
1N7048UR-1	5.10	4.590	5.610	0.100	0.004	3.67	80
1N7049UR-1	5.60	5.040	6.160	0.090	0.004	4.03	80
1N7050UR-1	6.20	5.580	6.820	0.080	0.003	4.46	70
1N7051UR-1	6.80	6.120	7.480	0.070	0.002	4.90	70

.....continued

Type Number	Regulator Current I_P (mA) at $V_S = 25V$ ¹			Minimum Regulator Impedance at $V_S = 25$ Z_S (M Ω) ²	Minimum Knee Impedance at $V_K = 6.0V$ Z_K (M Ω) ³	Maximum Limiting Voltage at $I_L = 0.8 I_P$ (min) V_L (volts)	Peak Operating Voltage Volts
	Nom.	Min.	Max.				
1N7052UR-1	7.50	6.750	8.250	0.050	0.0015	5.40	60
1N7053UR-1	8.20	7.380	9.020	0.030	0.0015	5.90	60
1N7054UR-1	9.10	8.190	10.01	0.020	0.001	6.55	50
1N7055UR-1	10.00	9.000	11.10	0.010	0.001	7.20	50

Notes:

1. Pulse measurement at 1% duty cycle, 10 milliseconds maximum.
2. Z_S is derived by superimposing a 90 Hz RMS signal equal to 10% of V_S on V_S
3. Z_K is derived by superimposing a 90 Hz RMS signal equal to 10% of V_K on V_K

4. Graphs

Figure 4-1. Current-Regulator Characteristics

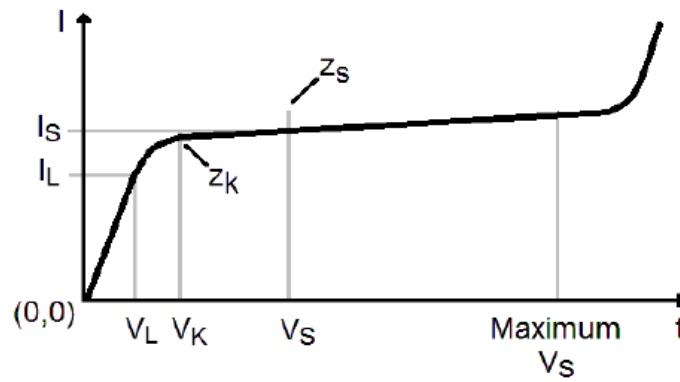


Figure 4-2. Temperature Coefficient

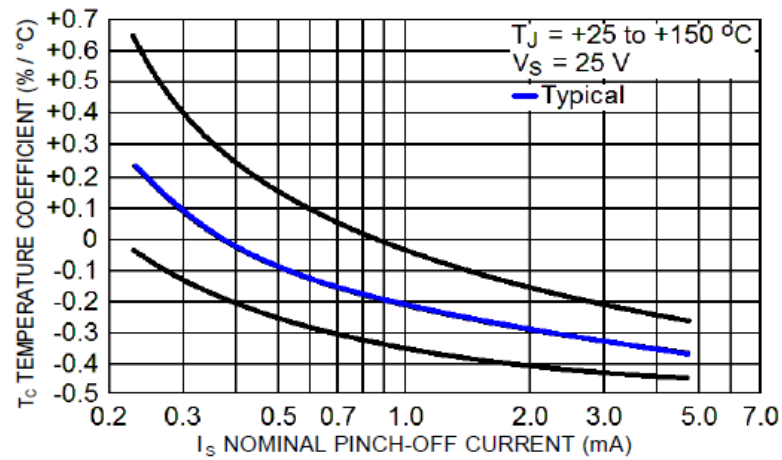


Figure 4-3. Temperature Coefficient

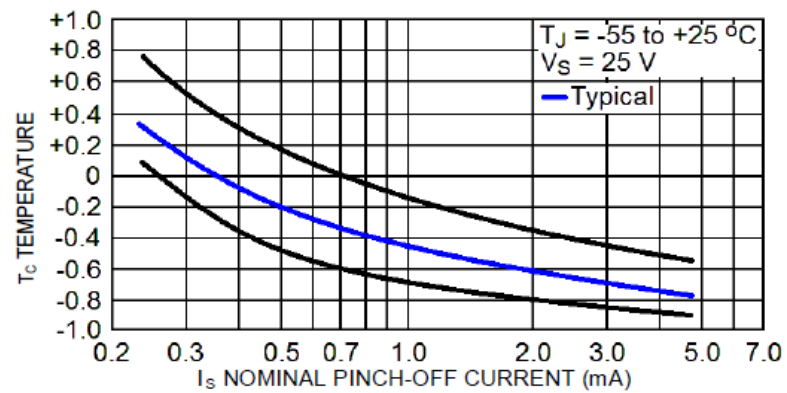
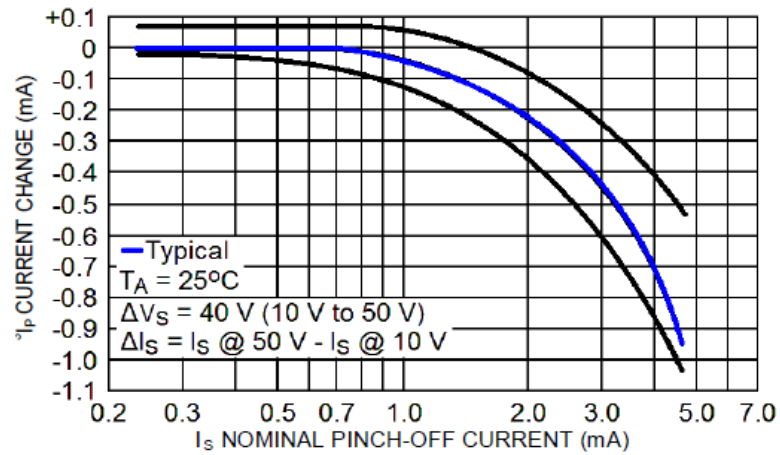


Figure 4-4. Current Regulation Factor

5. Package Dimensions

Figure 5-1. Physical Dimensions (DO-213AB)

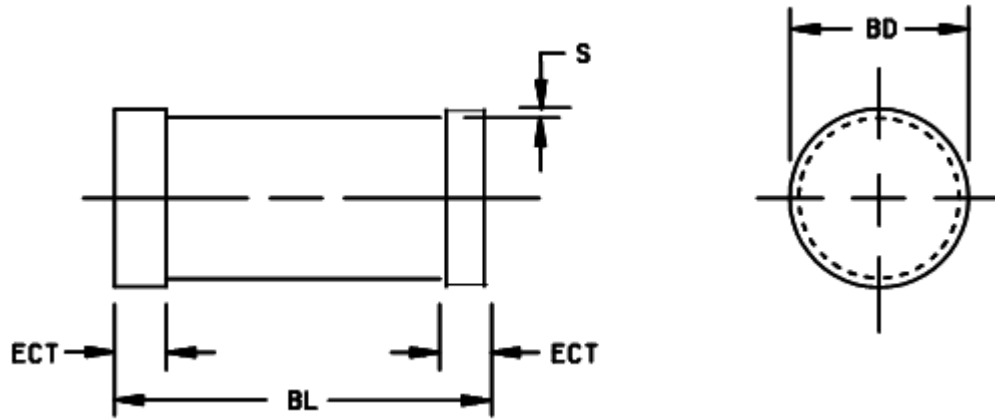


Table 5-1. Package Dimensions

Ltr	Dimensions			
	Inches		Millimeters	
	Min.	Max.	Min.	Max.
BD	0.094	0.105	2.39	2.67
BL	0.189	0.205	4.80	5.21
ECT	0.016	0.022	0.41	0.55
S	0.001 min		0.03 min	

Notes:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

6. Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

Revision	Date	Description
A	02/2025	Microsemi document LDS-0013 converted to Microchip template and assigned literature number DS00005745.

Microchip Information

Trademarks

The “Microchip” name and logo, the “M” logo, and other names, logos, and brands are registered and unregistered trademarks of Microchip Technology Incorporated or its affiliates and/or subsidiaries in the United States and/or other countries (“Microchip Trademarks”). Information regarding Microchip Trademarks can be found at <https://www.microchip.com/en-us/about/legal-information/microchip-trademarks>.

ISBN: 979-8-3371-0581-9

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP “AS IS”. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP’S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer’s risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip products are strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.