



LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			H2	REVISED PER ECO-11-005030	24MAR2011	RK	HMR
			H3	ECR-16-016696	14SEP2017	GA	MKO

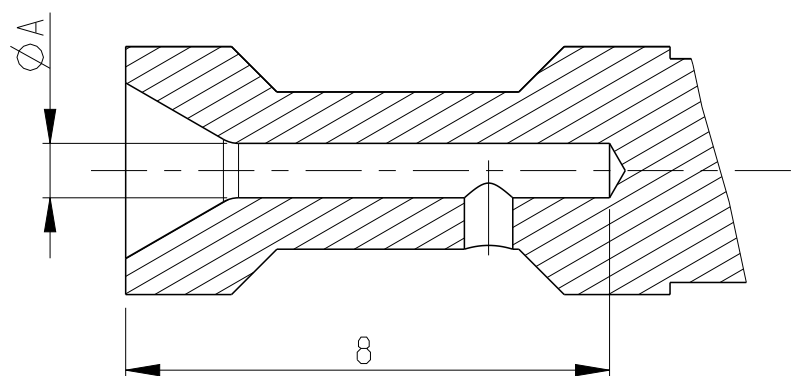

1	MATERIAL SEE TABLE
2	SURFACE SEE TABLE
3	ASSEMBLY WEIGHT SEE TABLE
4	PACKAGING: 50 PIECES IN POLYBAG
5	PACKAGING: 500 PIECES IN POLYBAG & CARTON
6	CROSS-SECTION MARKING
7	NO VENTILATION HOLE REQUIRED AT CROSS SECTION $>4 \text{ mm}^2$
8	SUITABLE SOCKET CONTACT: PN 1105301
9	SUITABLE INSERTS: SERIES HVT
10	SUITABLE CRIMP TOOL: PN 1-1105851-8
11	SUITABLE INSERTION TOOL: PN 0-1102855-6
12	SUITABLE EXTRACTION TOOL: PN 0-1102855-3
13	STANDARDS: DIN EN 61984, DIN EN 60664-1
14	OBSOLETE

ASSEMBLY WEIGHT IN (Kg)																															
0.00142	1																CuZn39Pb3 F43	GOLD PLATING	2.85	3.9	6	1									
0.00144		1																	Pin Contact 2.5 mm ²	2.2	3.2		5								
0.00148			1																Pin Contact 1.5 mm ²	1.8	3.0		4								
0.00145				1															Pin Contact 0.75-1.0 mm ²	1.45	2.6		3								
0.00149					1														Pin Contact 0.5 mm ²	1.1	2.6		2								
0.00150						1													Pin Contact 0.13-0.4 mm ²	0.9	2.6		1								
0.00144							1												Pin Contact 14 AWG	2.0	3.2		8								
0.00148								1											Pin Contact 12 AWG	2.55	3.6		9								
0.00133									1										Pin Contact 10 AWG	3.2	4.1		7								
0.00142										1									Pin Contact 4.0 mm ²	2.85	3.9		6								
0.00144											1						Pin Contact 2.5 mm ²	2.2	3.2	5											
0.00148												1					Pin Contact 1.5 mm ²	1.8	3.0	4											
0.00145													1				Pin Contact 0.75-1.0 mm ²	1.45	2.6	3											
0.00149														1			Pin Contact 0.5 mm ²	1.1	2.6	2											
0.00150															1		Pin Contact 0.13-0.4 mm ²	0.9	2.6	1											
	5-2	4-2	3-2	2-2	1-2	6-2		9-1	7-2	5-1	4-1	3-1	2-1	1-1	6-1	DESCRIPTION	MATERIAL	SURFACE	ØA	ØB	CROSS SECTION MARKING	ITEM NO									
	5-9	4-9	3-9	2-9	1-9	6-9	8-8	9-8	7-8	5-8	4-8	3-8	2-8	1-8	6-8																
HVT-C-Sti: Au: 4.0 mm ²																ORDERING TEXT															
HVT-C-Sti: Au: 2.5 mm ²																															
HVT-C-Sti: Au: 1.5 mm ²																															
HVT-C-Sti: Au: 0.75-1.0 mm ²																															
HVT-C-Sti: Au: 0.5 mm ²																															
HVT-C-Sti: Au: 0.13-0.4 mm ²																															
HVT-C-Sti: Ag: AW G.14																															
HVT-C-Sti: Ag: AW G.12																															
HVT-C-Sti: Ag: AW G.10																															
HVT-C-Sti: Ag: 4.0 mm ²																															
HVT-C-Sti: Ag: 2.5 mm ²																															
HVT-C-Sti: Ag: 1.5 mm ²																															
HVT-C-Sti: Ag: 0.75-1.0 mm ²																															
HVT-C-Sti: Ag: 0.5 mm ²																															
HVT-C-Sti: Ag: 0.13-0.4 mm ²																															

THIS DRAWING IS A CONTROLLED DOCUMENT.																DWN 04 SEP. 2007		TE Connectivity											
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 8075 DIM 132 2748 mm-1 DIM 1301-100																CHK 04 SEP. 2007													
																APVD 04 SEP. 2007													
																T. SCHNURPFELT													
MATERIAL FINISH																PRODUCT SPEC		NAME CLIP -											
																108-74035													
																APPLICATION SPEC													
MATERIAL FINISH																114-74013		SIZE		CAGE CODE		DRAWING NO				RESTRICTED TO			
																WEIGHT		A2		00779		C-1105300				-			
																CUSTOMER DRAWING													

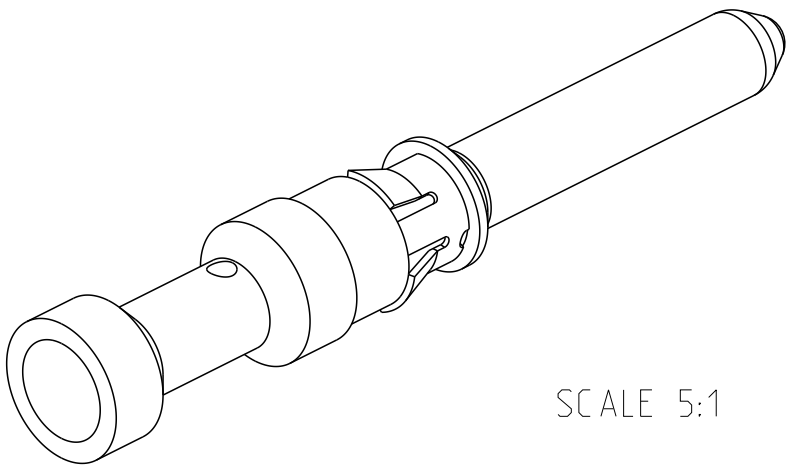

SCALE 5:1