
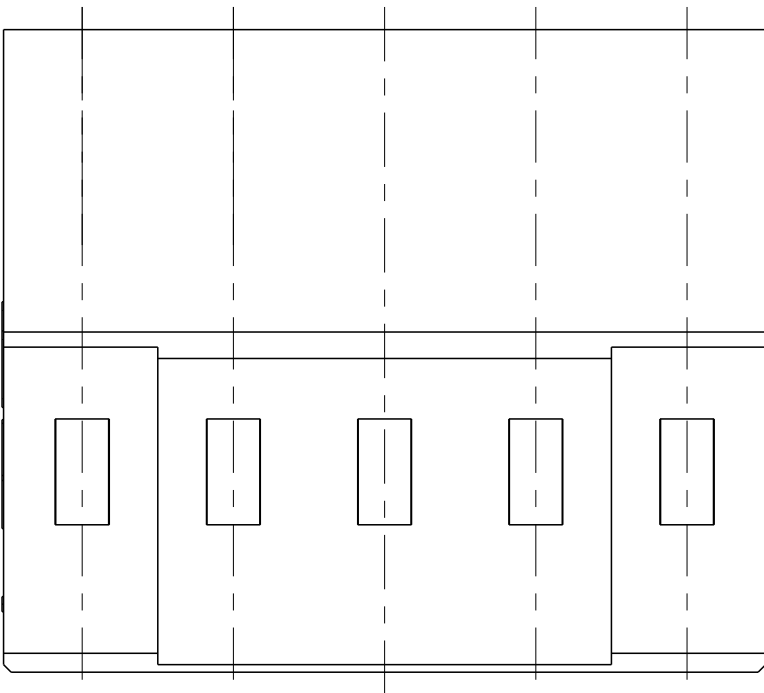
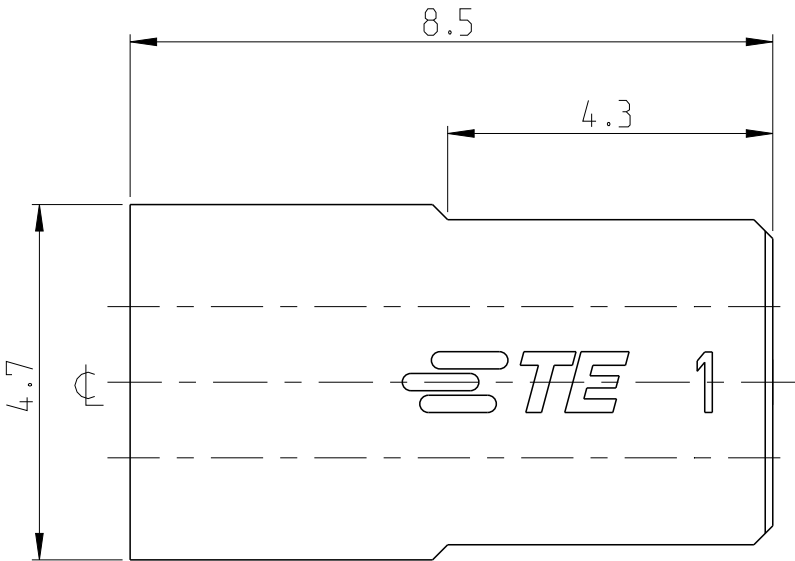


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE TO PRODUCTION	02APR2020	AY	PS
	A1	SMART PN DETAILS ADDED	15FEB2022	SCB	PS


NOTES:

1. MATERIAL:
LCP BLACK, UL94 V0
2. N = NUMBER OF POSITION PER HOUSING.
3. HOUSING TO BE USED WITH CRIMP CONTACTS
2316113 (AWG 28-24/0.08-0.22 mm²) AND
2316114 (AWG 30-28/0.05-0.08 mm²)
4. PACKAGING : BULK BOX

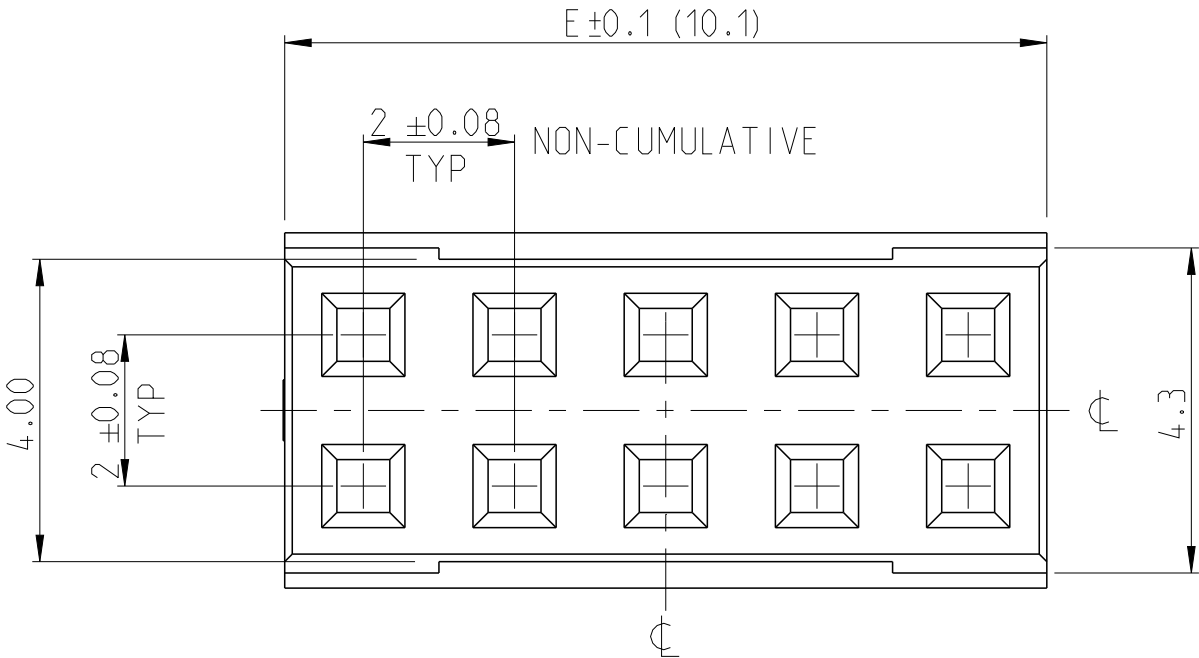


CENTERLINE FOR ODD AND EVEN
POSITION HOUSINGS

SCALE 5:1

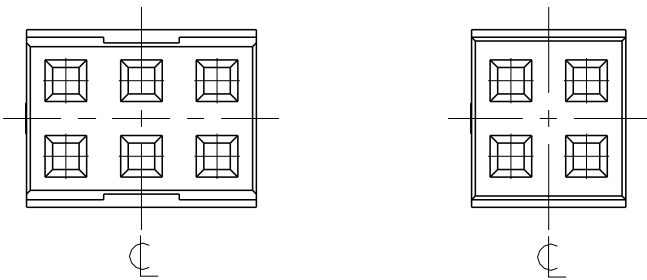

DUAL ROW HOUSING
PLAIN VERSION
1- -0 AS SHOWN

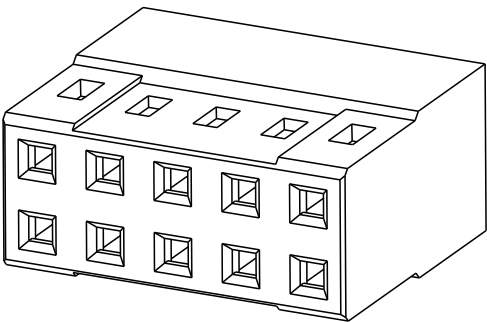

SCALE 5:1

50.1	50	2MM-RC-D25-BX
48.1	48	2MM-RC-D24-BX
46.1	46	2MM-RC-D23-BX
44.1	44	2MM-RC-D22-BX
42.1	42	2MM-RC-D21-BX
40.1	40	2MM-RC-D20-BX
38.1	38	2MM-RC-D19-BX
36.1	36	2MM-RC-D18-BX
34.1	34	2MM-RC-D17-BX
32.1	32	2MM-RC-D16-BX
30.1	30	2MM-RC-D15-BX
28.1	28	2MM-RC-D14-BX
26.1	26	2MM-RC-D13-BX
24.1	24	2MM-RC-D12-BX
22.1	22	2MM-RC-D11-BX
20.1	20	2MM-RC-D10-BX
18.1	18	2MM-RC-D09-BX
16.1	16	2MM-RC-D08-BX
14.1	14	2MM-RC-D07-BX
12.1	12	2MM-RC-D06-BX
10.1	10	2MM-RC-D05-BX
8.1	8	2MM-RC-D04-BX
6.1	6	2MM-RC-D03-BX
4.1	4	2MM-RC-D02-BX
DIM "E"	N	SMART PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 29OCT2017 RAKSHITH R NAYAK	TE Connectivity			
		CHK 29OCT2017 RAKSHITH R NAYAK				
		APVD 11DEC2017 PRASHANTH S	NAME AMPMODU 2mm RECEPTACLE, wTB HOUSING, CRIMP, DUAL ROW, PLAIN			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-64040-1		SIZE A2	
		0 PLC ±	APPLICATION SPEC 114-32173		CAGE CODE 00779	
		1 PLC ±0.15	WEIGHT -		DRAWING NO C=2316108	
		2 PLC ±0.10			RESTRICTED TO -	
		3 PLC ±				
		4 PLC ±				
MATERIAL SEE NOTE 1		ANGLES ±2°				
		FINISH -	CUSTOMER DRAWING		SCALE 10:1	
		-			SHEET 1 OF 2	
					REV A1	

4

3

2

1

© 2022 TE Connectivity. All Rights Reserved.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

SMART PART NUMBER

2MM -RC - D__ - BX

PRODUCT SERIES

2MM

AMPMODU 2mm SERIES

GENDER / TYPE

RC

RECEPTACLE HOUSING FOR CRIMP TYPE (STANDARD)

NUMBER OF ROWS

D

DUAL ROW

PACKAGING

BX

BOX

NUMBER OF PINS PER ROW

XX

02 THROUGH 25
(ENTER TWO DIGITS)

SMART PN EXAMPLES:

1. 2MM-RC-D02-BX:
AMPMODU 2mm, RECEPTACLE HOUSING FOR CRIMP TYPE (STANDARD), DUAL ROW , 02 POSITION PER ROW , BOX PACKAGING

2. 2MM-RC-D25-BX:
AMPMODU 2mm, RECEPTACLE HOUSING FOR CRIMP TYPE (STANDARD), DUAL ROW , 25 POSITION PER ROW , BOX PACKAGING

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.15

2 PLC ±0.10

3 PLC ±

4 PLC ±

ANGLES ±2°

FINISH -

-

DWN 29OCT2017
CHK RAKSHITH R NAYAK
29OCT2017
APVD RAKSHITH R NAYAK
11DEC2017
PRASHANTH S

PRODUCT SPEC

108-64040-1

APPLICATION SPEC

114-32173

WEIGHT

-

CUSTOMER DRAWING

NAME

AMPMODU 2mm RECEPTACLE, w/B HOUSING, CRIMP, DUAL ROW , PLAIN

SIZE

A2

CAGE CODE

00779

DRAWING NO

2316108

RESTRICTED TO

-

SCALE

1:1

SHEET

2

OF

2

REV

A1

1471-9 (3/13)