



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REDRAWN/REVISED PER ECO-17-001757	11NOV2017	GR	JO



$\oplus$	0.3(M)	Y	Z(S)
----------	--------	---	------



$\varnothing$	0.3	(M)	Y	Z	(S)
---------------	-----	-----	---	---	-----

—HOLD DOWN FEATURES LOCATED
AS SHOWN FOR 20, 24, 30, 40, 50, 60,
80 AND 100 POSN ASSEMBLIES (SEE TABLE)




Ø 1.52 ± 0.05 TYP -
(PAD)


RECOMMENDED BOARD LAYOUT

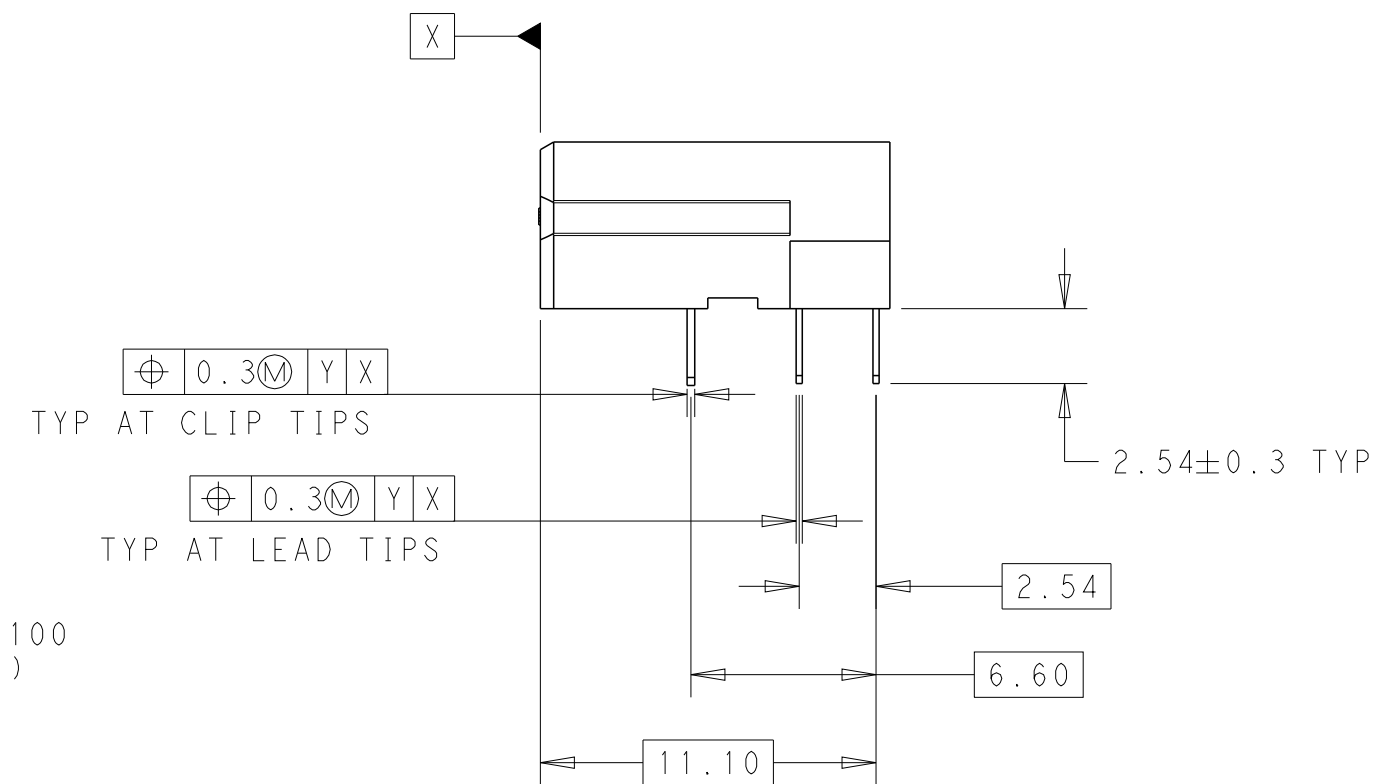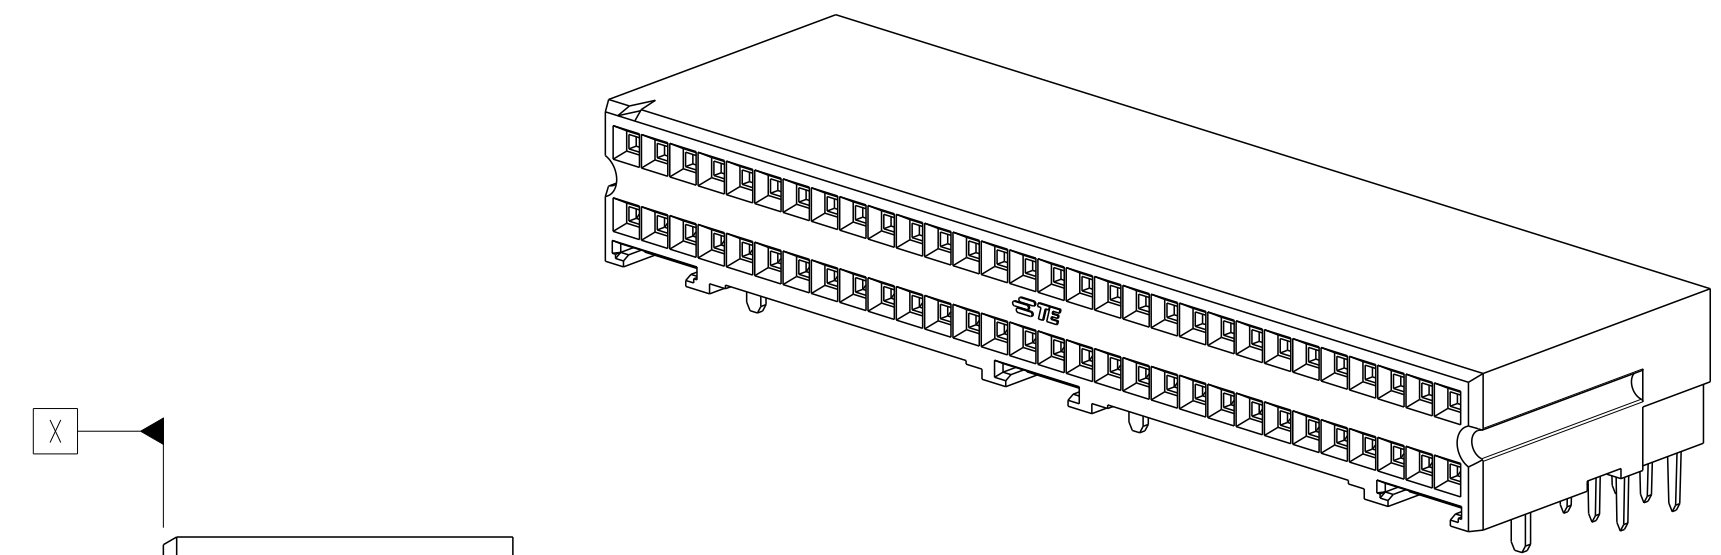

TYP AT LEAD TIPS

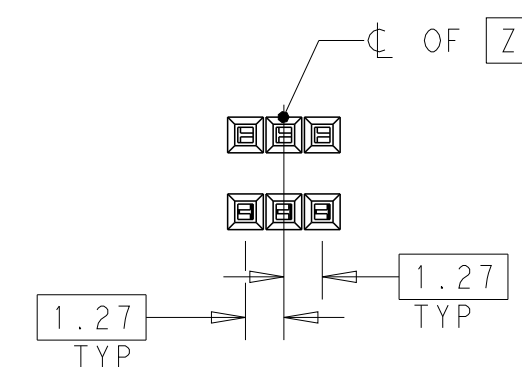

BASIC DIMENSIONS FOR
EVEN NO OF SPACES
(SEE TABLE)

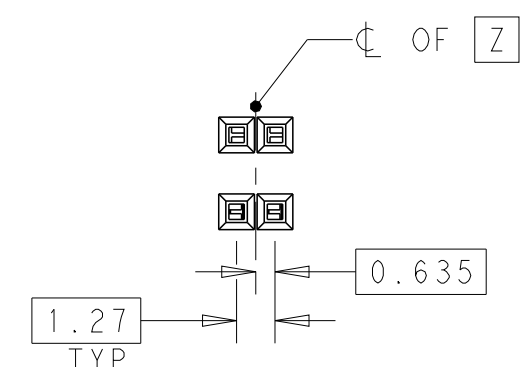

BASIC DIMENSIONS FOR
ODD NO OF SPACES
(SEE TABLE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. RAMESH 11NOV2017 CHK J. OLSON 11NOV2017 APVD J. OLSON 11NOV2017		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±0.3 2 PLC ±.13 3 PLC ±. 4 PLC ±. ANGLES ±0.5° FINISH -		NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, AMPMODU SYSTEM 50 -	
MATERIAL - - - 		PRODUCT SPEC 108-1093 APPLICATION SPEC 114-25031 WEIGHT -		SIZE A2	CAGE CODE 00779
SEE TABLE		CUSTOMER DRAWING		DRAWING NO C-103911	RESTRICTED TO -
				SCALE 4:1	SHEET 1 of 2
				REV N	

