


LOC	DIST	REVISIONS			
GP	00	P	LTR	DESCRIPTION	DATE
			D1	REVISED PER ECO-11-004835	11MAR11
				DWN	APVD
				RK	HMR

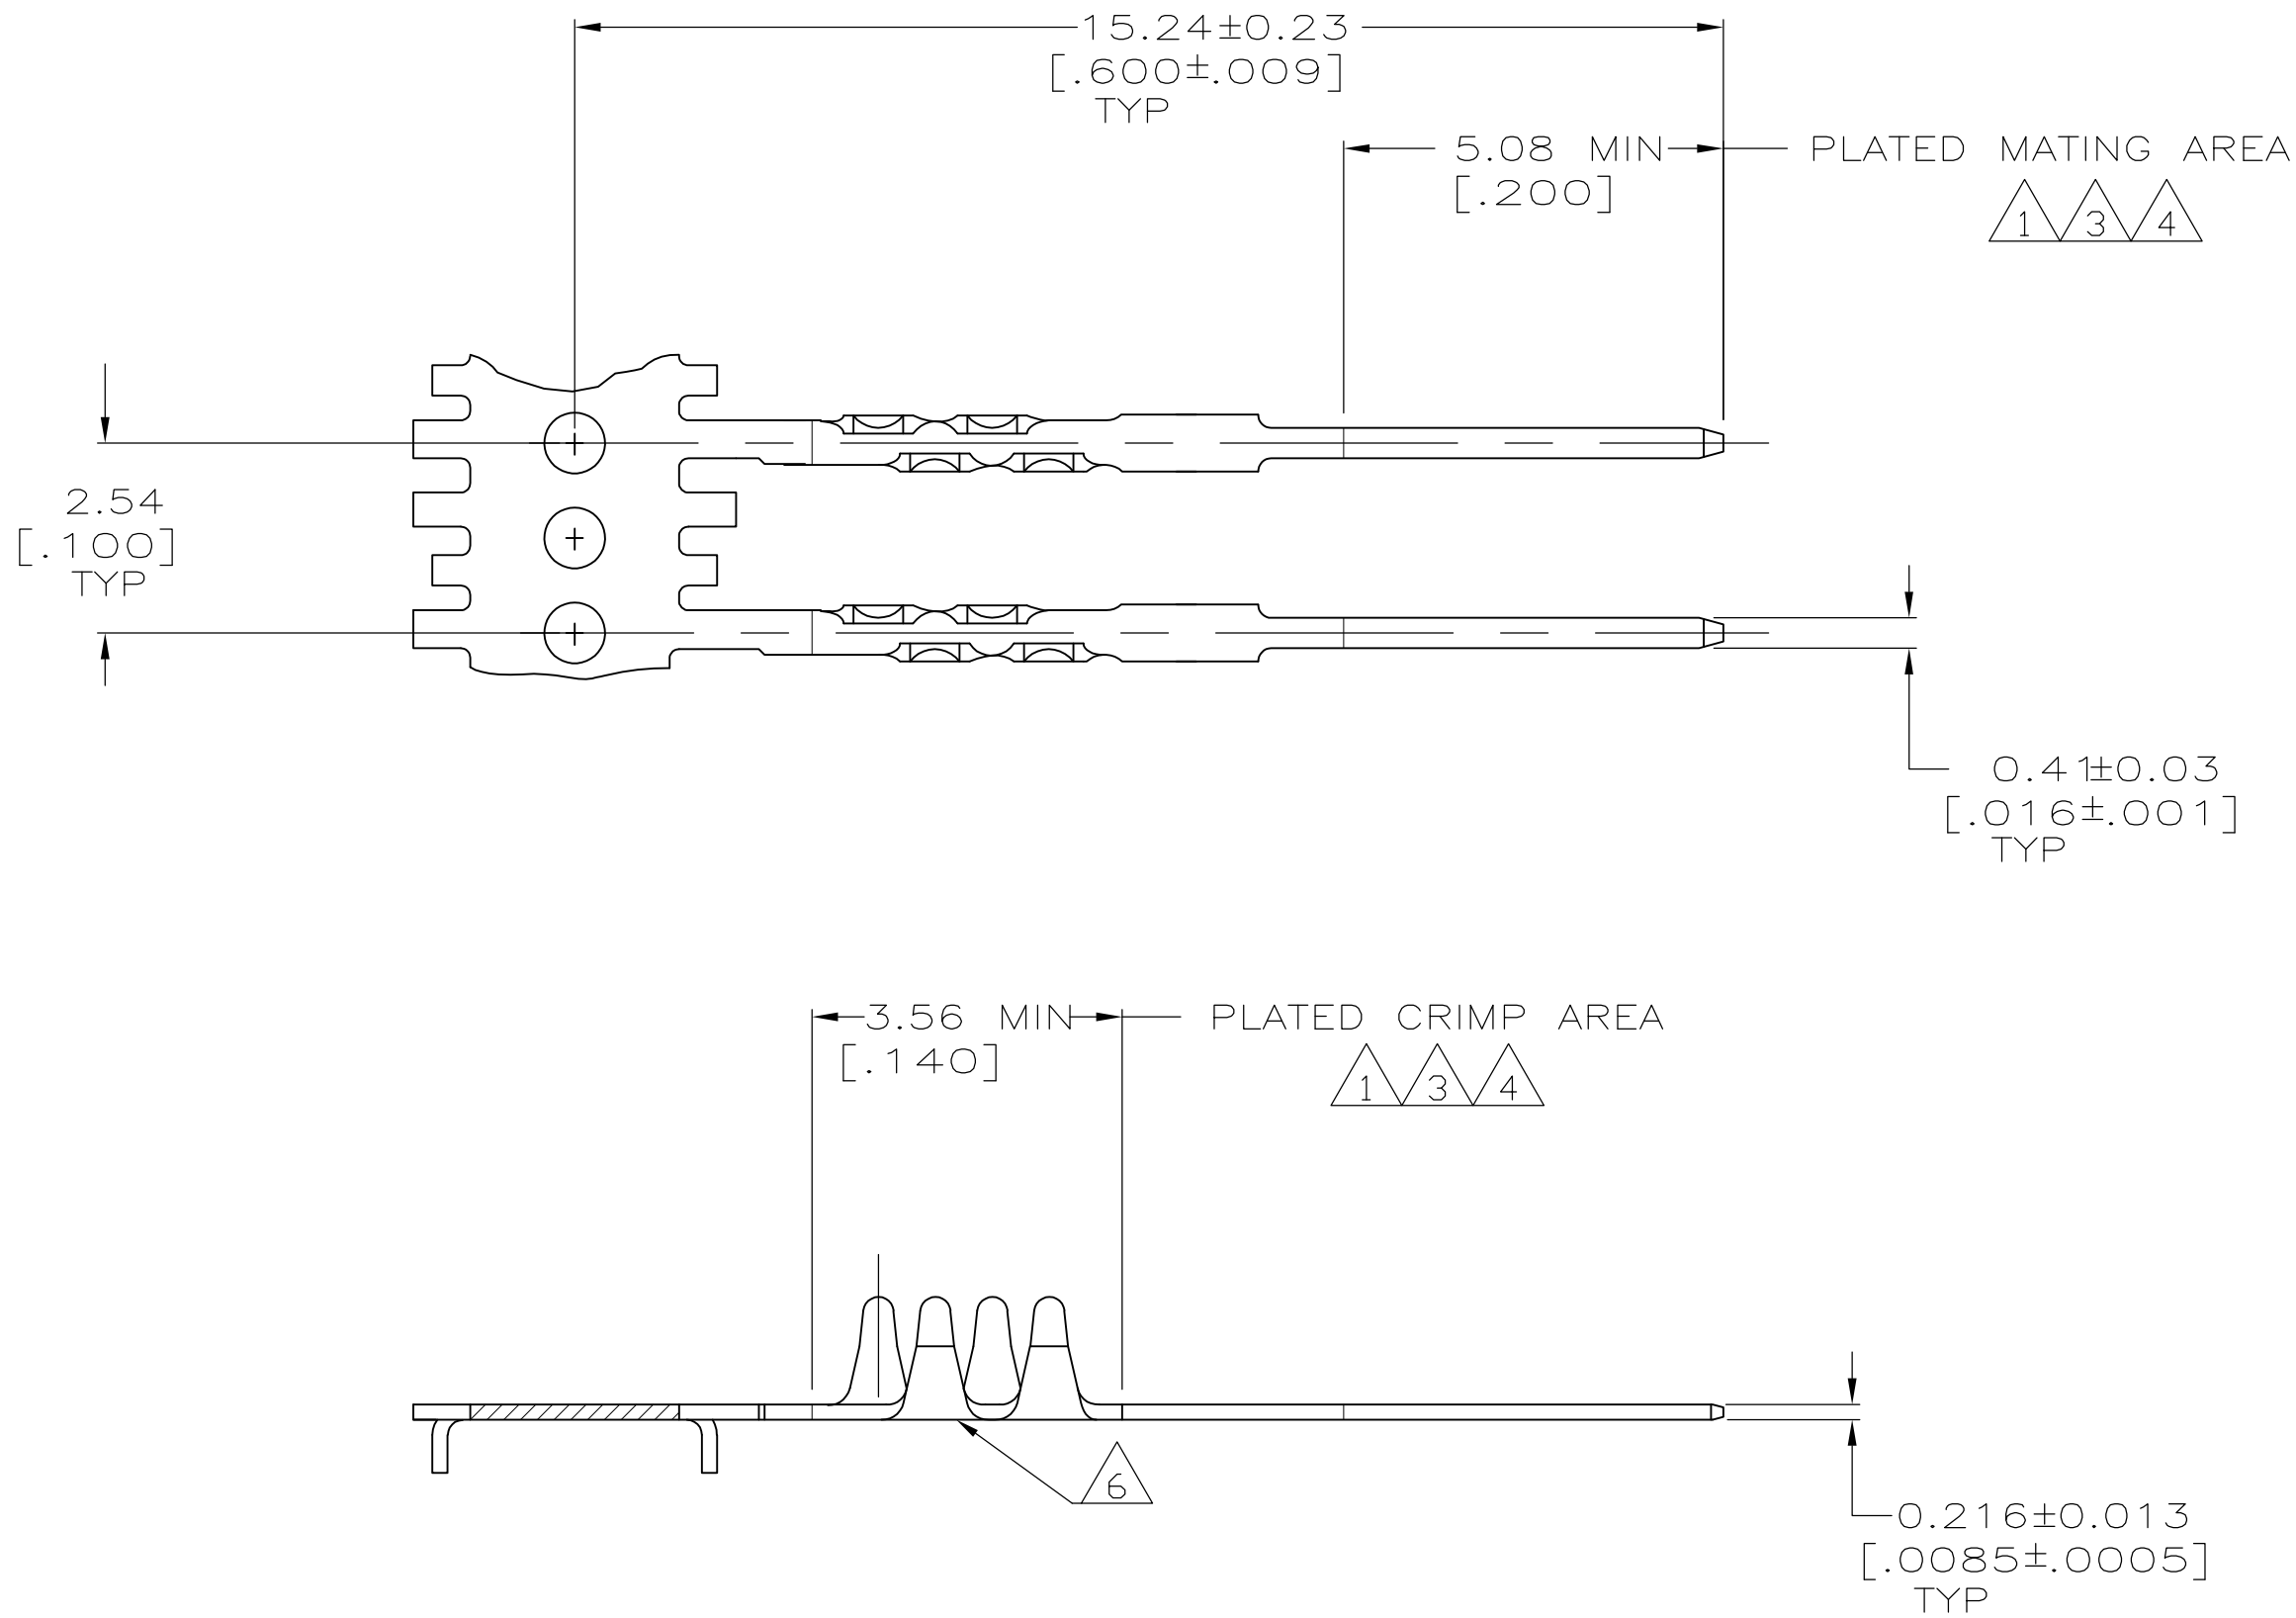

- 1 $0.38 \mu\text{m}$ [$.000015$] MIN GOLD ON MATING AREA, $1.27 \mu\text{m}$ [$.000050$] MIN BRIGHT TIN-LEAD ON CRIMP AREA, BOTH OVER $1.27 \mu\text{m}$ [$.000050$] MIN NICKEL.
- 2 $2.54 \mu\text{m}$ [$.000100$] MIN BRIGHT TIN-LEAD, OVER $1.27 \mu\text{m}$ [$.000050$] MIN NICKEL.
- 3 GOLD FLASH ON CRIMP AREA, $2.54 \mu\text{m}$ [$.000100$] MIN TIN ON MATING AREA, BOTH OVER $1.27 \mu\text{m}$ [$.000050$] MIN NICKEL.
- 4 $0.38 \mu\text{m}$ [$.000015$] MIN GOLD ON MATING AREA, GOLD FLASH ON CRIMP AREA, BOTH OVER $1.27 \mu\text{m}$ [$.000050$] MIN NICKEL.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 6 GOLD PLATING MAY OR MAY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL

5 OBSOLETE	4	487923-5
3	6	487923-4
5 OBSOLETE	1	487923-3
	2	487923-1
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.OBERMAN	3-7-90	TE Connectivity			
		CHK	R.STONE	3-8-90				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME			
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		-	CONTACT, SOLDER TAB, .050 C/L			
				PRODUCT SPEC	-			
MATERIAL		FINISH		APPLICATION SPEC	-			
PHOSPHOR BRONZE		SEE TABLE		-	-			
				WEIGHT	-			
				CUSTOMER DRAWING	-			
				SCALE	10:1			
				SHEET	1 OF 1			
				REV	D1			