
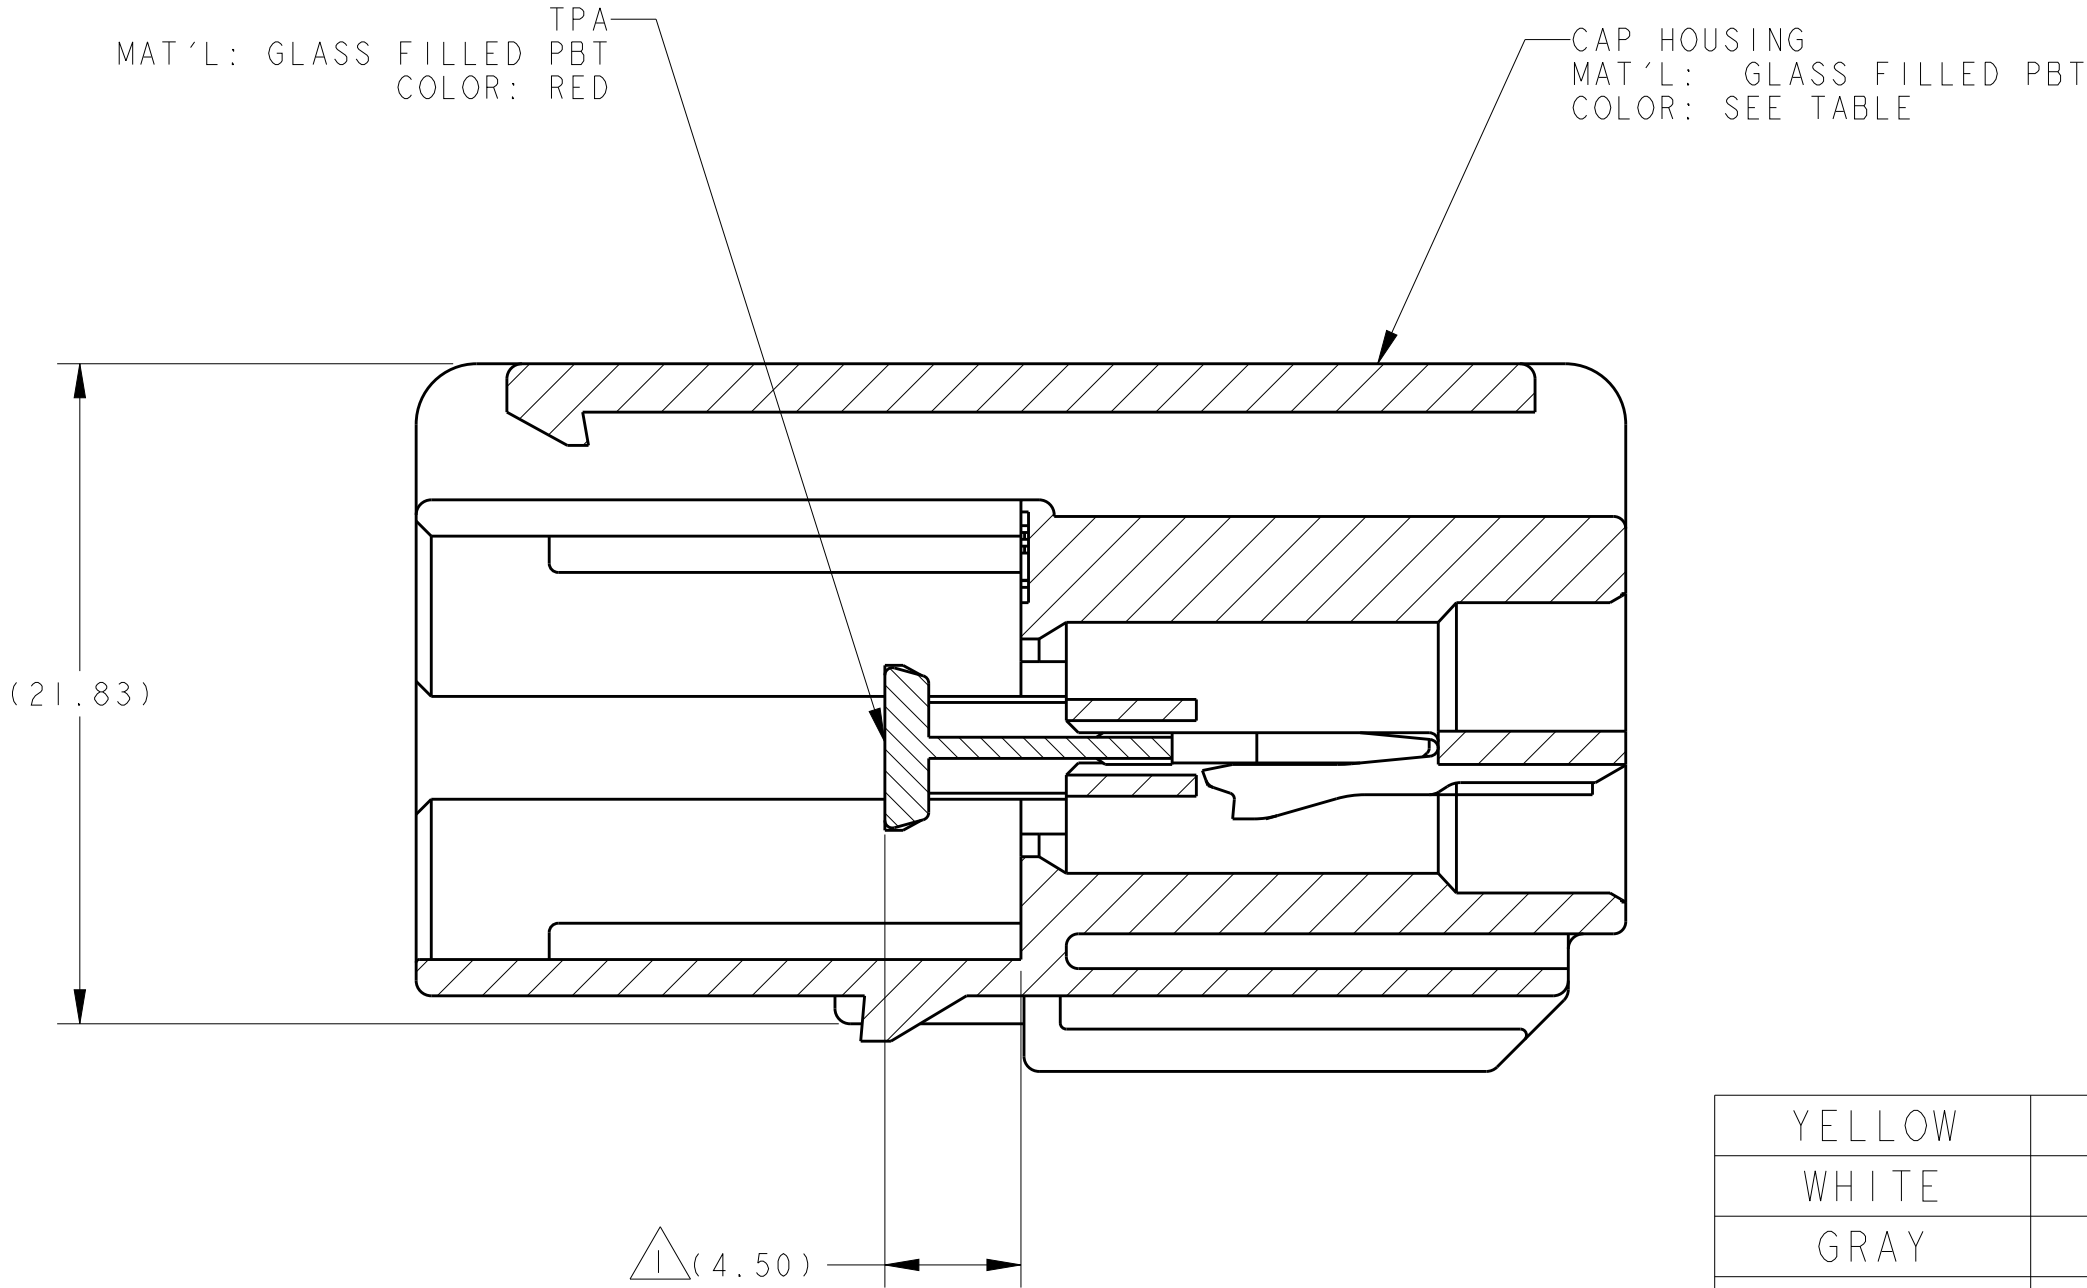
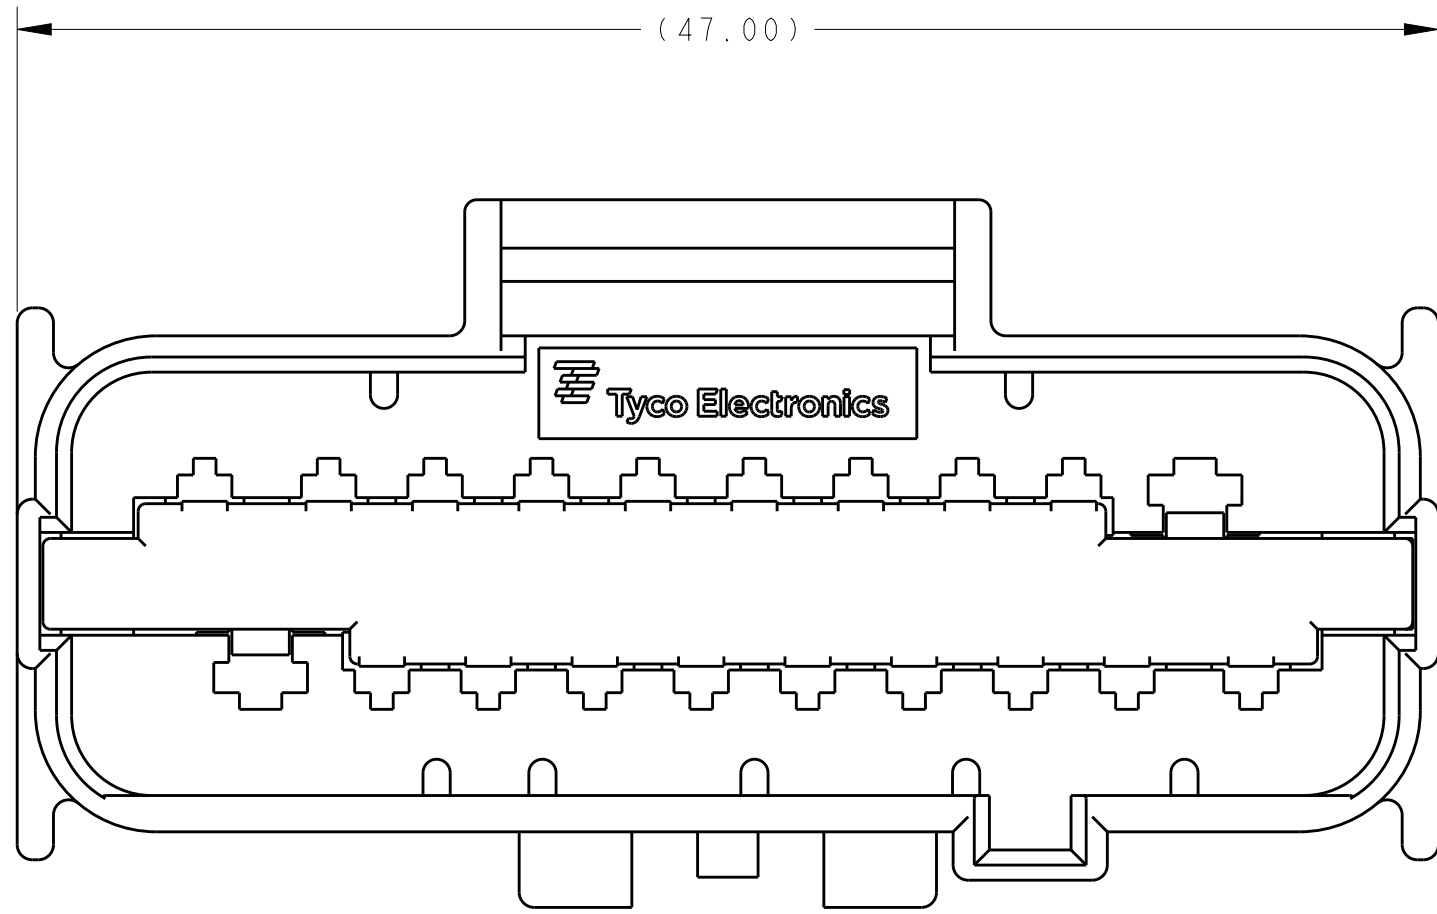
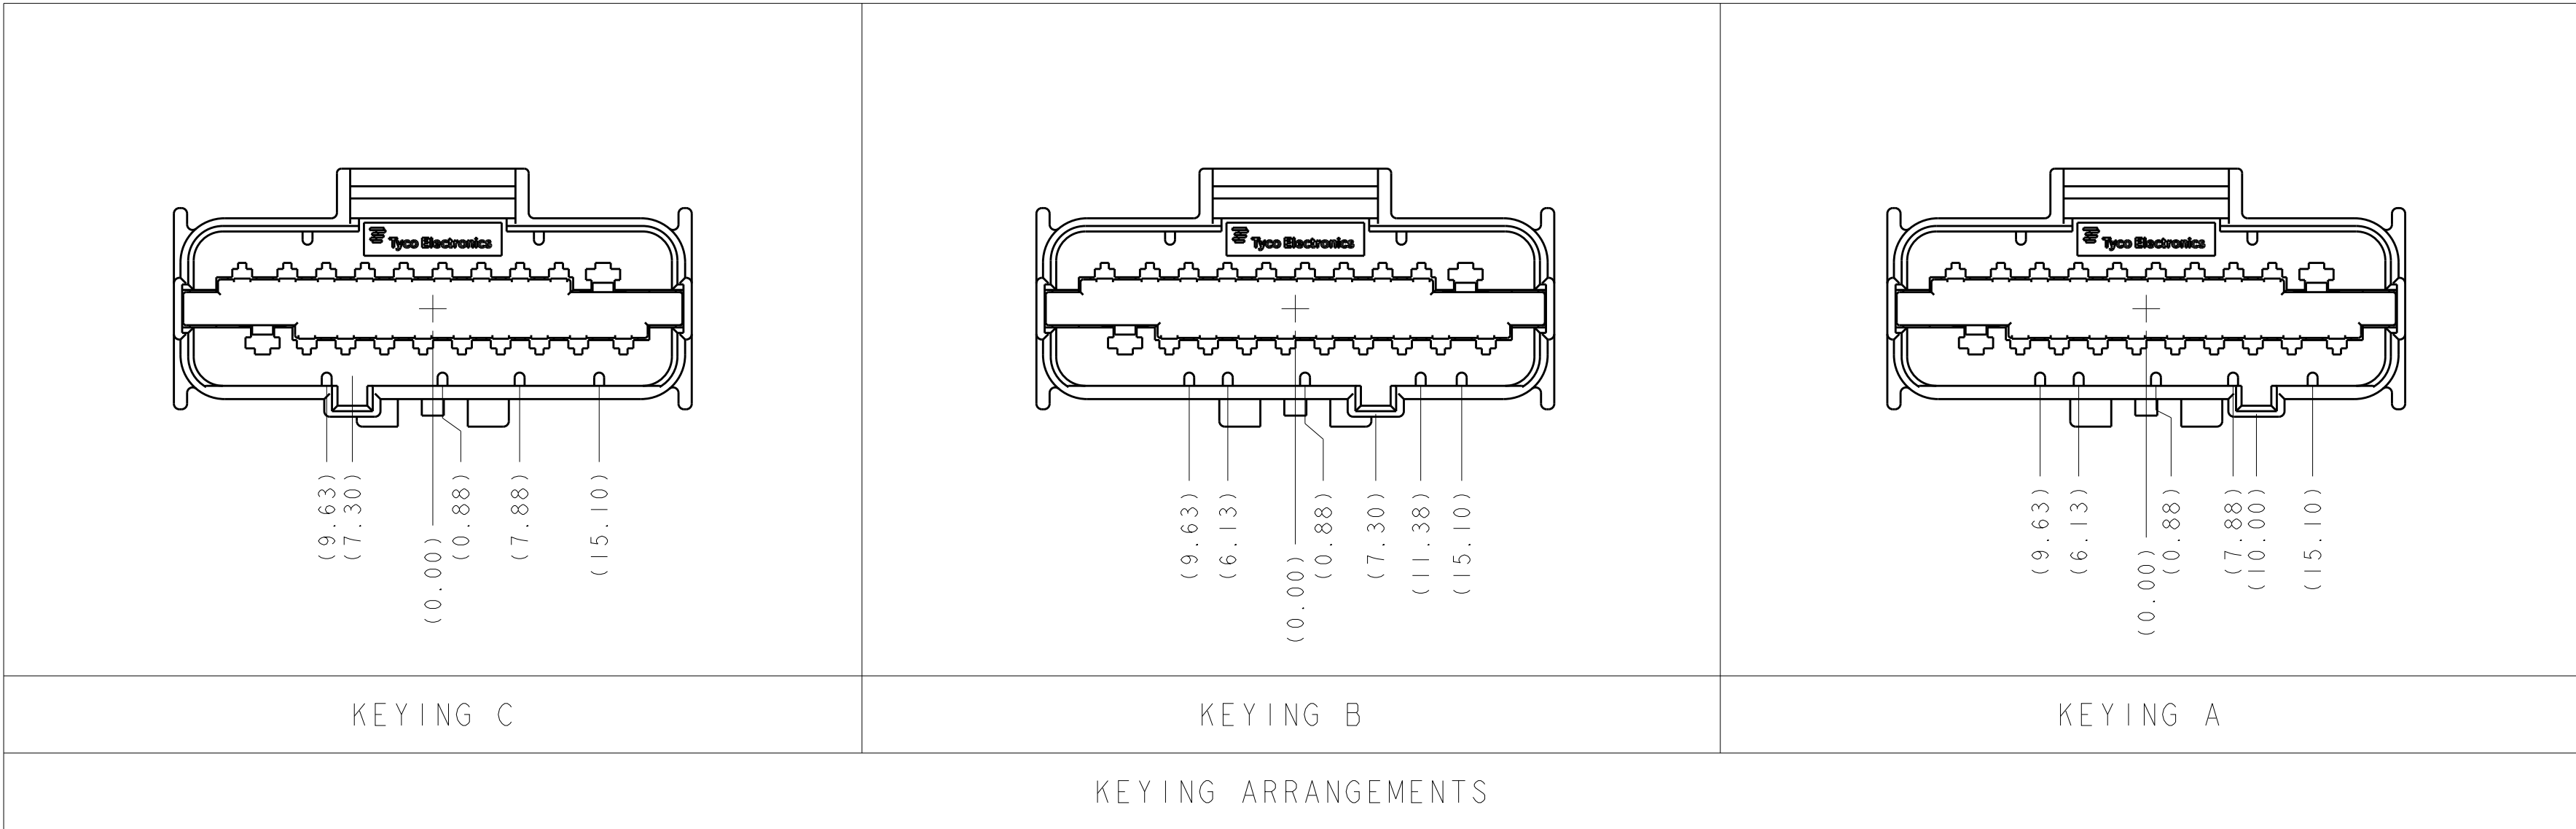


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
1		FIRST DRAFT	27AUG2009	MBH	BB
2		REVISED	15FEB2010	JRS	BSB
A		ECR-10-025922	22DEC2010	HM	BB
A1		ECR-14-007751	30MAY2014	VP	ML

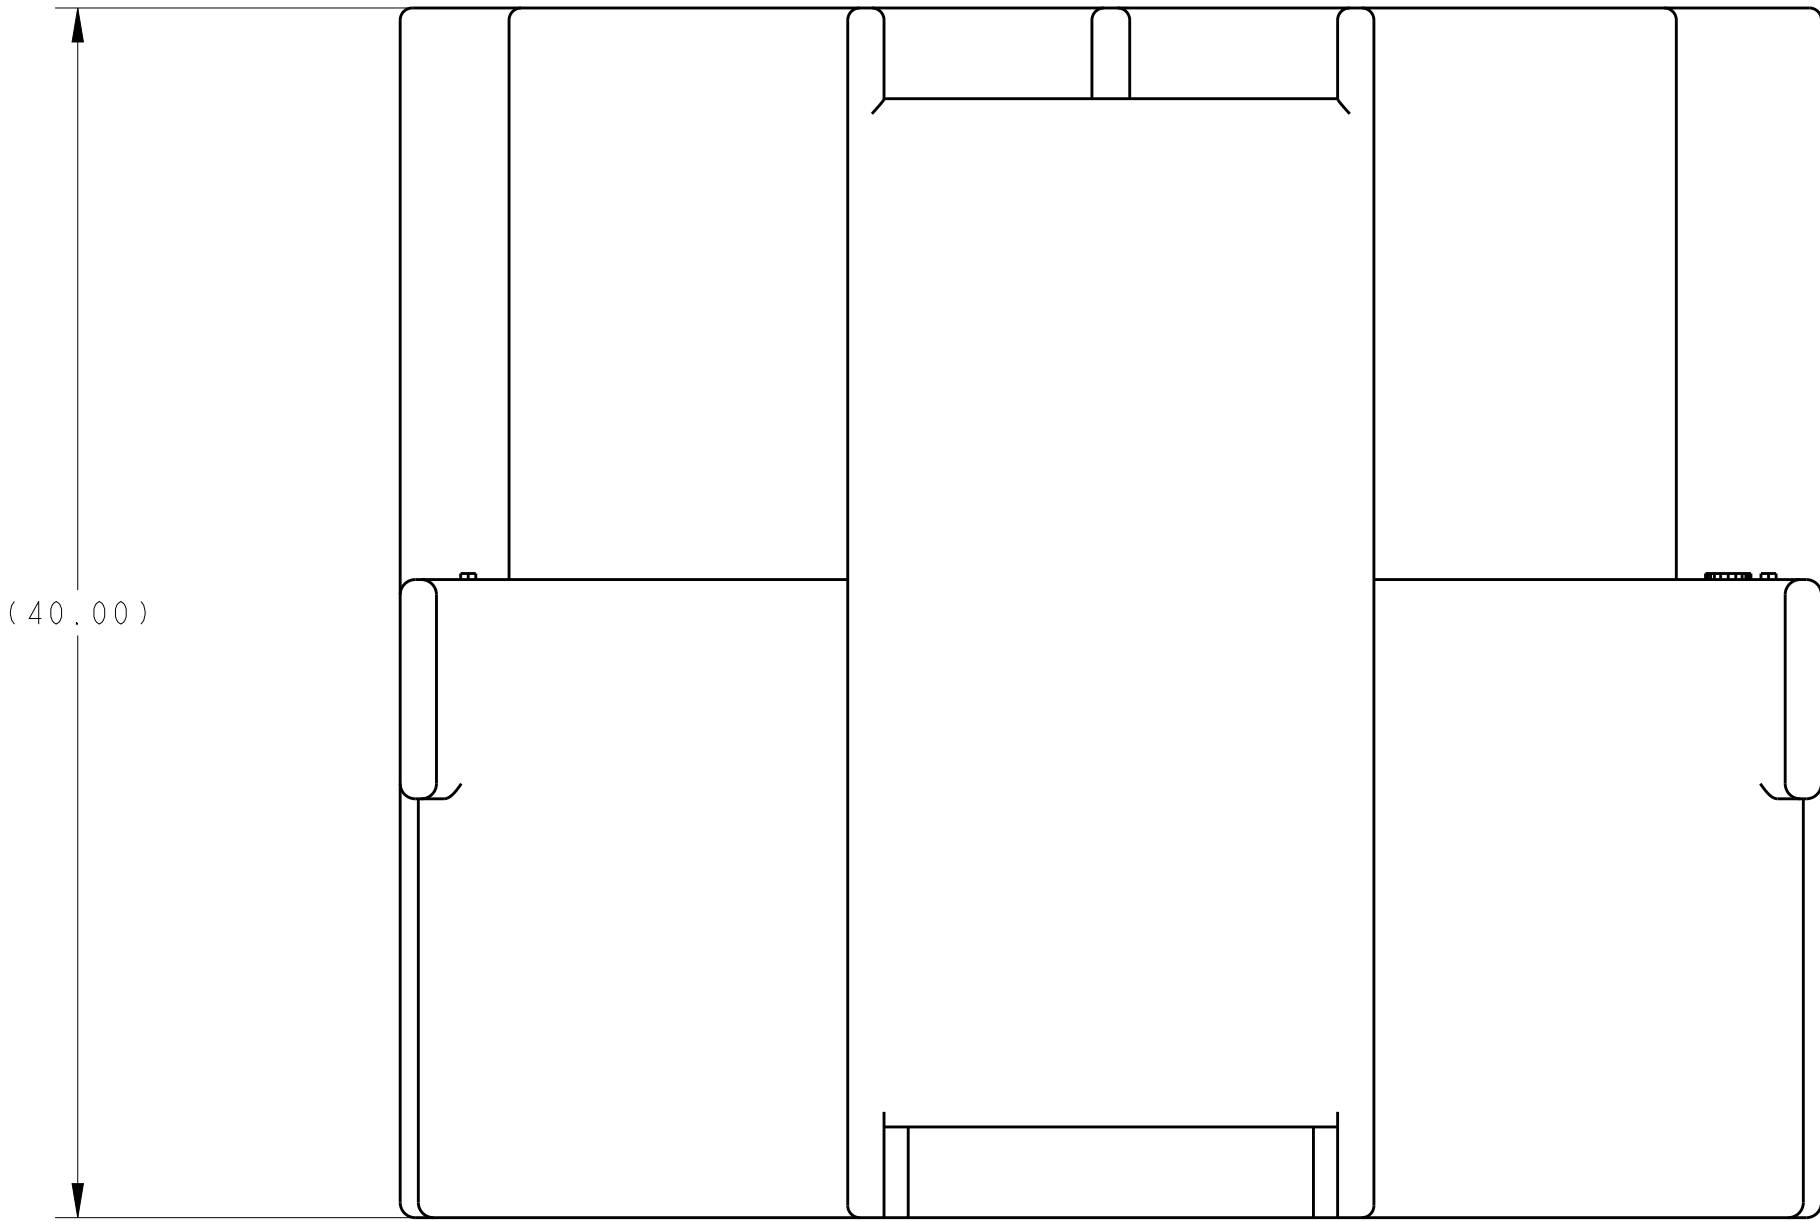

SECTION Z-Z

YELLOW	STANDARD	A	1-2098380-0
WHITE	EPC	C	2098380-9
GRAY	EPC	B	2098380-8
BLACK	EPC	A	2098380-7
WHITE	NONE	C	2098380-6
GRAY	NONE	B	2098380-5
BLACK	NONE	A	2098380-4
WHITE	STANDARD	C	2098380-3
GRAY	STANDARD	B	2098380-2
BLACK	STANDARD	A	2098380-1
HOUSING COLOR	MOUNTING CLIP COMPATIBILITY	KEYING	PART NUMBER

△ TPA SHIPPED IN STAGED POSITION

2. THIS CAP CONNECTOR MATES WITH CAP CONNECTOR, TYCO ELECTRONICS DRAWING NUMBER 2098377 AND IS INTENDED FOR CLASS 2 (105°C MAX) APPLICATIONS

3. SEE INSTRUCTION SHEET 408-10433.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN M. HITCHCOCK 27AUG2009	TE Connectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK B. BUCHTER 27AUG2009			
DIMENSIONS:		mm		APVD B. BUCHTER 27AUG2009	NAME		
				PRODUCT SPEC	CAP ASSEMBLY, 20 POSN UNSEALED HYBRID CONNECTOR		
				APPLICATION SPEC			
MATERIAL		SEE CALLOUT		WEIGHT	A100779C=2098380		
				CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV A1		