


P	LTR	DESCRIPTION	DATE	DWN	APVD
	G5	REVISED PER ECN-23-240910	29NOV2023	WLS	VS
	G6	REVISED PER ECN-24-279340	23AUG2024	WLS	JP

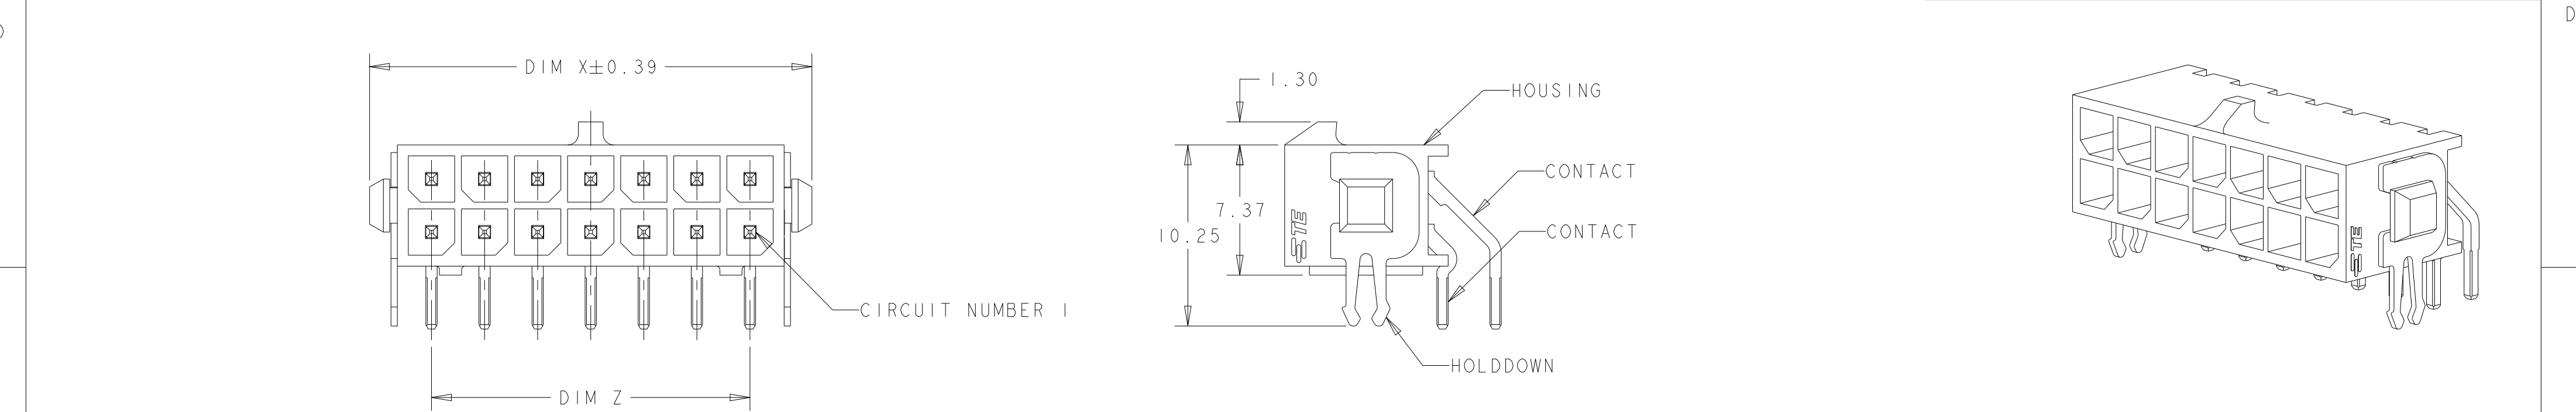

- 1 MATERIAL;
CONTACTS - BRASS.
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
- 2 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 3 PLATING;
CONTACTS - 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL ALL OVER.
HOLDDOWNS - 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL ALL OVER.
- 4 COUNTERPART RECOMMENDED IS PN 794617 (DASH ACCORDING TO NUMBER OF POSITION).
- 5 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.

OBSELETE

36.86	37.30	33.00	40.00	24	5-794677-4
33.86	34.30	30.00	37.00	22	5-794677-2
30.86	31.30	27.00	34.00	20	5-794677-0
27.86	28.30	24.00	31.00	18	4-794677-8
24.86	25.30	21.00	28.00	16	4-794677-6
21.86	22.30	18.00	25.00	14	4-794677-4
18.86	19.30	15.00	22.00	12	4-794677-2
15.86	16.30	12.00	19.00	10	4-794677-0
12.86	13.30	9.00	16.00	8	3-794677-8
9.86	10.30	6.00	13.00	6	3-794677-6
6.86	7.30	3.00	10.00	4	3-794677-4
3.86	4.30	-	7.00	2	3-794677-2
DIM Y	DIM W	DIM Z	DIM X	NO. OF POSN.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±0.20
3 PLC ±
4 PLC ±
ANGLES ±1°
FINISH

MATERIAL

1

DWN B. HAYMAKER 12AUG99
CHK K. COBLE 12AUG99
APVD K. COBLE 12AUG99

PRODUCT SPEC

108-1836

APPLICATION SPEC

114-13000

WEIGHT

-

3

TE Connectivity

NAME

THRU-HOLE, RIGHT ANGLE, TIN HEADER MECHANICAL BOARDLOCK, DUAL ROW, MICRO MATE-N-LOK™

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2b0779

C-794677

-


CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 2

REV G6

1471-9 (3/13)

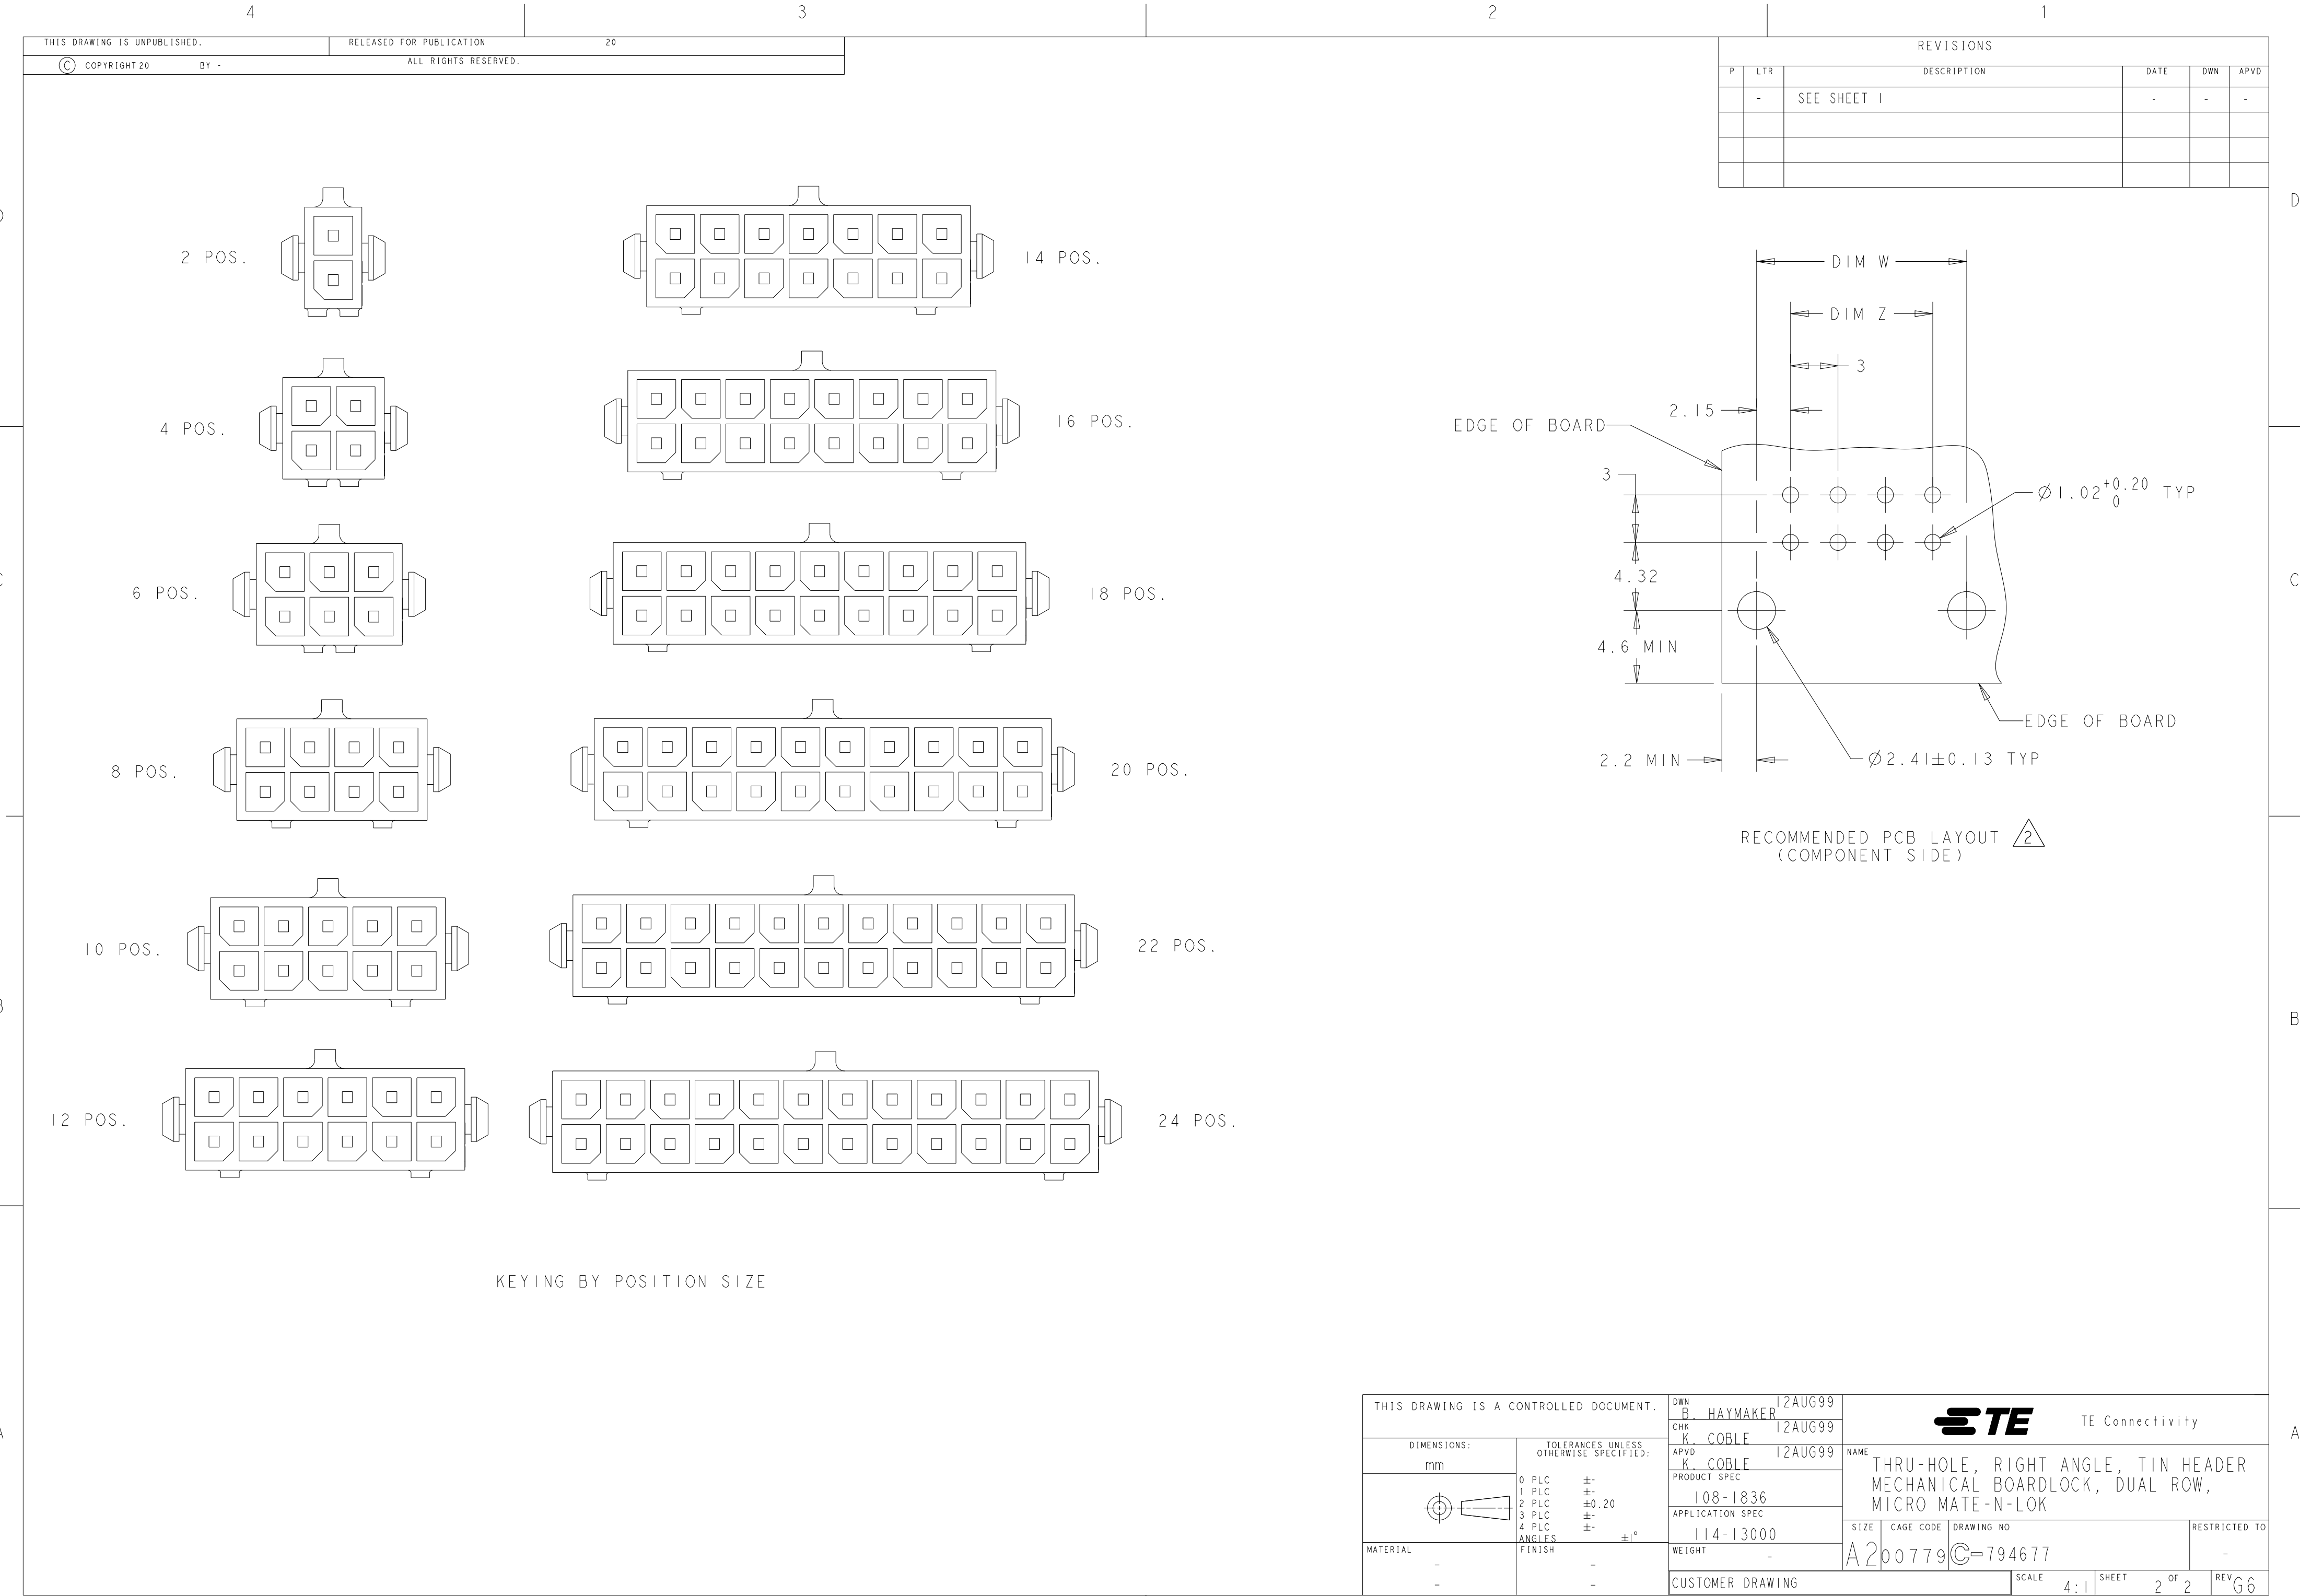

1471-9 (3/13)