© 2021 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER PCN-21-118564	04MAR2022	DRK	CB

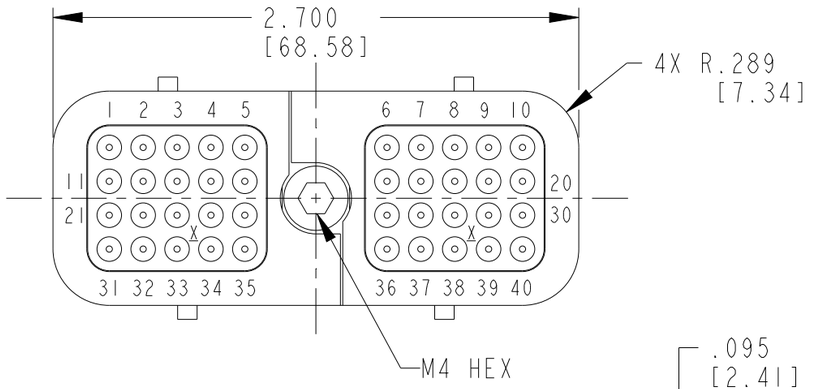

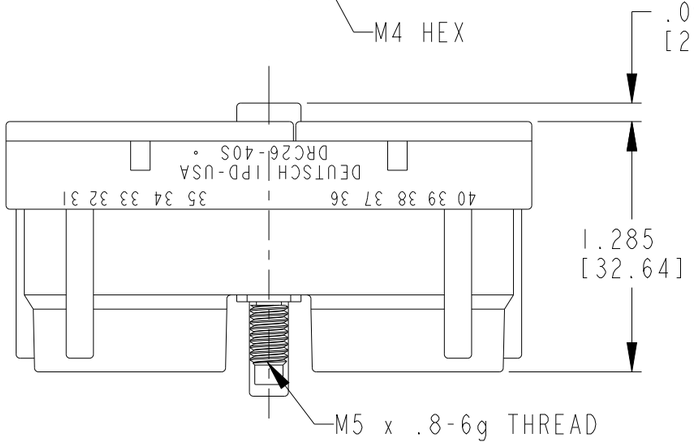

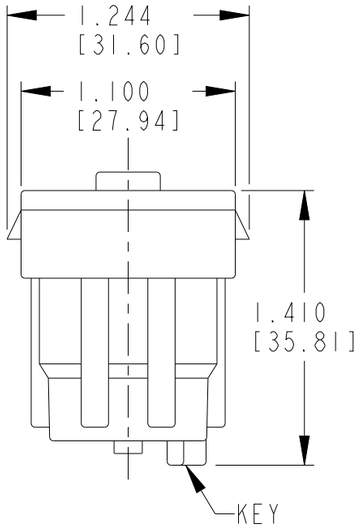

DRC26-40SA

DRC26-40SB

DRC26-40SC

DRC26-40SD

KEY ORIENTATION

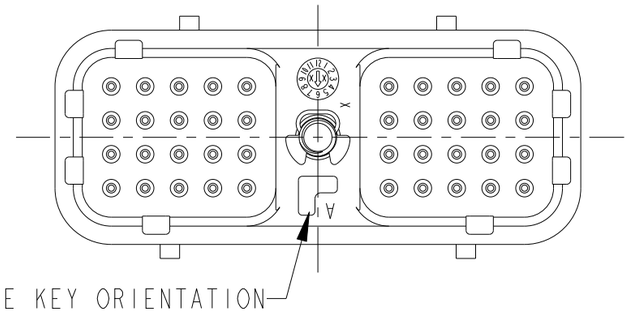

TCPN	ALIAS PART NUMBER
DRC26-40SA	DRC26-40SA
DRC26-40SB	DRC26-40SB
DRC26-40SC	DRC26-40SC
DRC26-40SD	DRC26-40SD

5. MATERIAL: HOUSING: PPS 40% GF (BLACK); BOLT: STEEL, TRIVALENT ZINC PLATED (ROHS COMPLIANT);
   CLIP: STEEL; GROMMET: VMQ

4. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16 NM].

3. THIS PLUG MATES WITH DRC23-40P*-**** RECEPTACLE.
   (* = A,B,C,D KEYS; **** = ALL MODIFICATIONS)

2. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION
   CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.

1. PLUG IS SUPPLIED WITH DUST CAP (NOT SHOWN).

NOTES: UNLESS OTHERWISE SPECIFIED

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE 2 [mm^2] REF ONLY
20	.040 [1.016]	.095 [2.413]	16-20 AWG [1.0-0.5]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.025 [.635]
4 PLC ±-
ANGLES ±-

MATERIAL 5

FINISH - -

DWN	D MEYER	30NOV2005
CHK	R MESSENGER	31MAR2005
APVD	R REED	31MAR2005
PRODUCT SPEC	108-151052	
APPLICATION SPEC	-	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

NAME
PLUG
40 CONTACTS, SIZE 20
DRC SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-DRC26-40SX	-

SCALE 5:4 SHEET 1 OF 1 REV E