


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L5	REVISED PER ECN-22-157689	10JUN2022	RK	CSD

AMP
WIRE RANGE

8 AWG
SOLID OR STRANDED

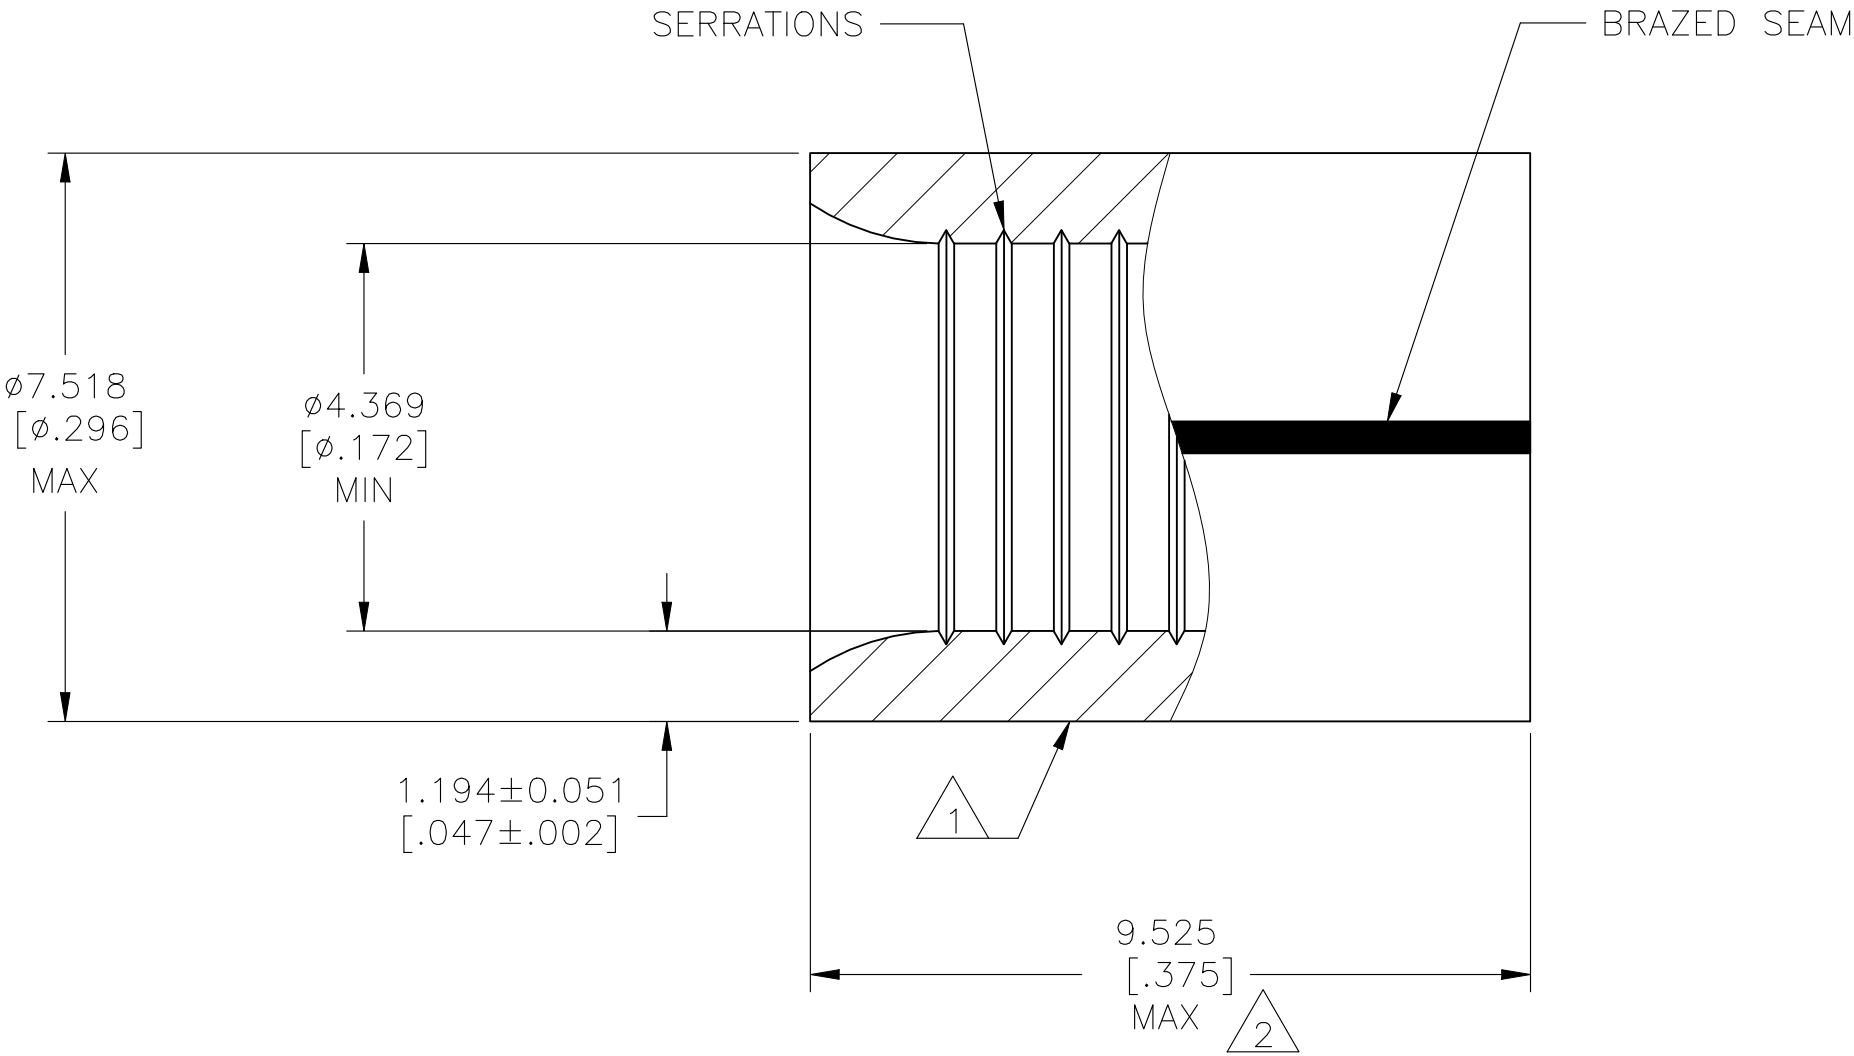

- 1 STAMP AMP 8W* APPROX AS SHOWN
- 2 MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS
- 3 COPPER PER ASTM B152 ANNEALED
- 4 UL LISTED E13288, 8 AWG STRANDED
- 5 CSA CERTIFIED LR7189, 8 AWG SOLID OR STRANDED
- 6 TIN PLATE 0.00254[.000100] MIN EXT THK PER ASTM B545
- 7 NICKEL PLATE 0.01651[.000650] MIN EXT THK PER SAE AMS-QQ-N-290
- 8 TIN/LEAD (60/40) PLATE, 0.00254 [.000100] MIN EXT THK PER SAE AMS-P-81728
- 9 NOTE DELETED
- 10 NOTE DELETED

5	25	LOOSE PIECE	170°C[338°F]	6	8-34318-3
---	100	LOOSE PIECE	343°C[650°F]	7	2-34318-1
5	100	LOOSE PIECE	170°C[338°F]	8	34318-1
4 5	500	LOOSE PIECE	170°C[338°F]	6	34318
APPROVALS	QTY	PACKAGE TYPE	MAX OPERATING TEMP	FINISH	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 4-5-93 CHK DA PATTERSON 4-5-93 APVD DA PATTERSON 4-5-93	TE Connectivity		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
	0 PLC	± -	SPLICE, PARALLEL, SOLISTRAND WIRE SIZE: 8 AWG		
	1 PLC	± -			
	2 PLC	± -			
	3 PLC	± 0.127[.005]			
	4 PLC	± -	UL 486 A-B		
	ANGLES	± -			
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO
3	SEE TABLE	-	A2	00779	C-34318
CUSTOMER DRAWING			SCALE	SHEET	REV
			10:1	1 OF 1	L5

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: SEE TABLE
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: N/A
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 6.64-10.5mm²[13,100-20,800] SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.