


1. MAT'L THICKNESS 1.778±0.051 [.070±.002]
2. NOTE DELETED.

3 STAMP: AMP 2W*60-75 APPROX AS SHOWN

4 MATERIAL: COPPER PER ASTM B152.


5 FINISH: TIN PLATE 0.00254[.000100] MIN
EXT THICKNESS PER ASTM B545.

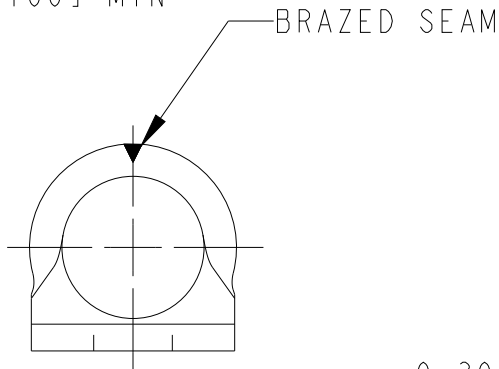


9.398 [.370]
MIN

30.785
[1.212]

17.196 [.677]
MIN



SCALE 1:1

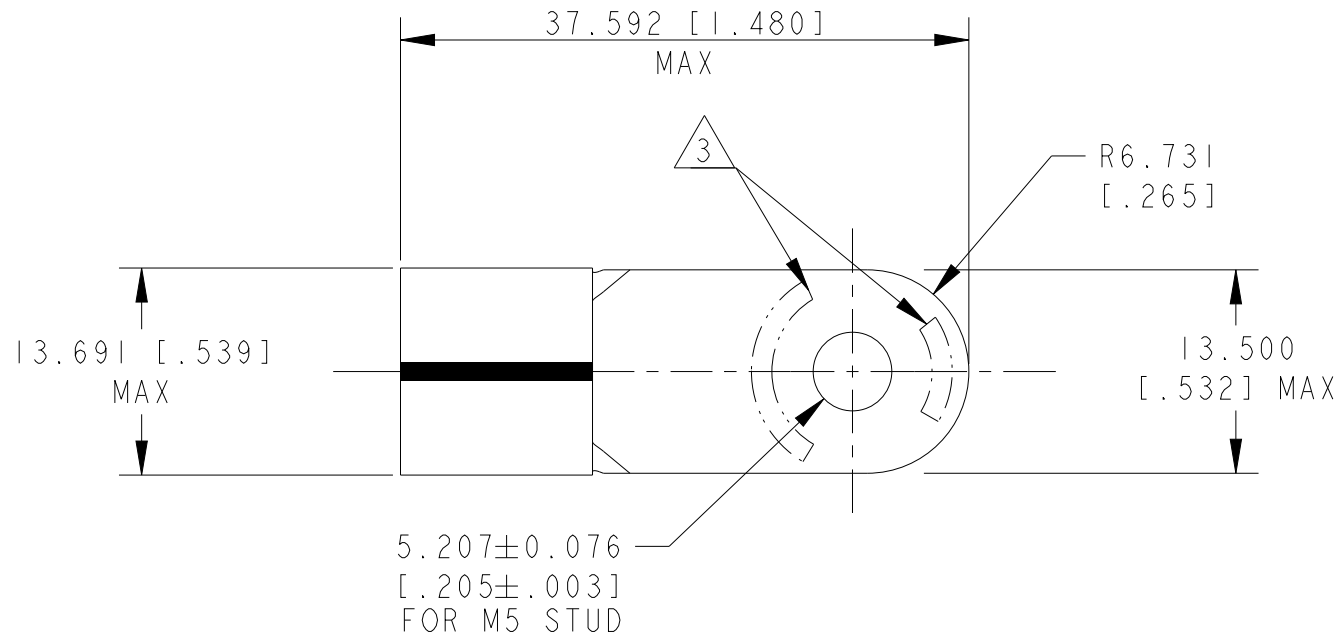

50	LOOSE PIECE	132101-2
QTY	PACKAGE TYPE	PART NUMBER

MAX. RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F]
VOLTAGE RATING: N/A
CIRCULAR MIL AREA: 26.7-42.2 mm ² [52,600-83,700] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm / INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±0.127[.005] 4 PLC ± ANGLES ±3
MATERIAL 4	FINISH 5

DWN JJ. DESPRETZ 04JUL2005
CHK G-ROBERT 04JUL2005
APVD Y-PETRONIN 04JUL2005
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -
CUSTOMER DRAWING

		TE Connectivity	
NAME TERMINAL, RING TONGUE, SOLISTRAND WIRE SIZE: 2 AWG,			
SIZE A3	CAGE CODE -	DRAWING NO C-132101	RESTRICTED TO
SCALE 2:1		SHEET 1	OF 1
		REV A3	