
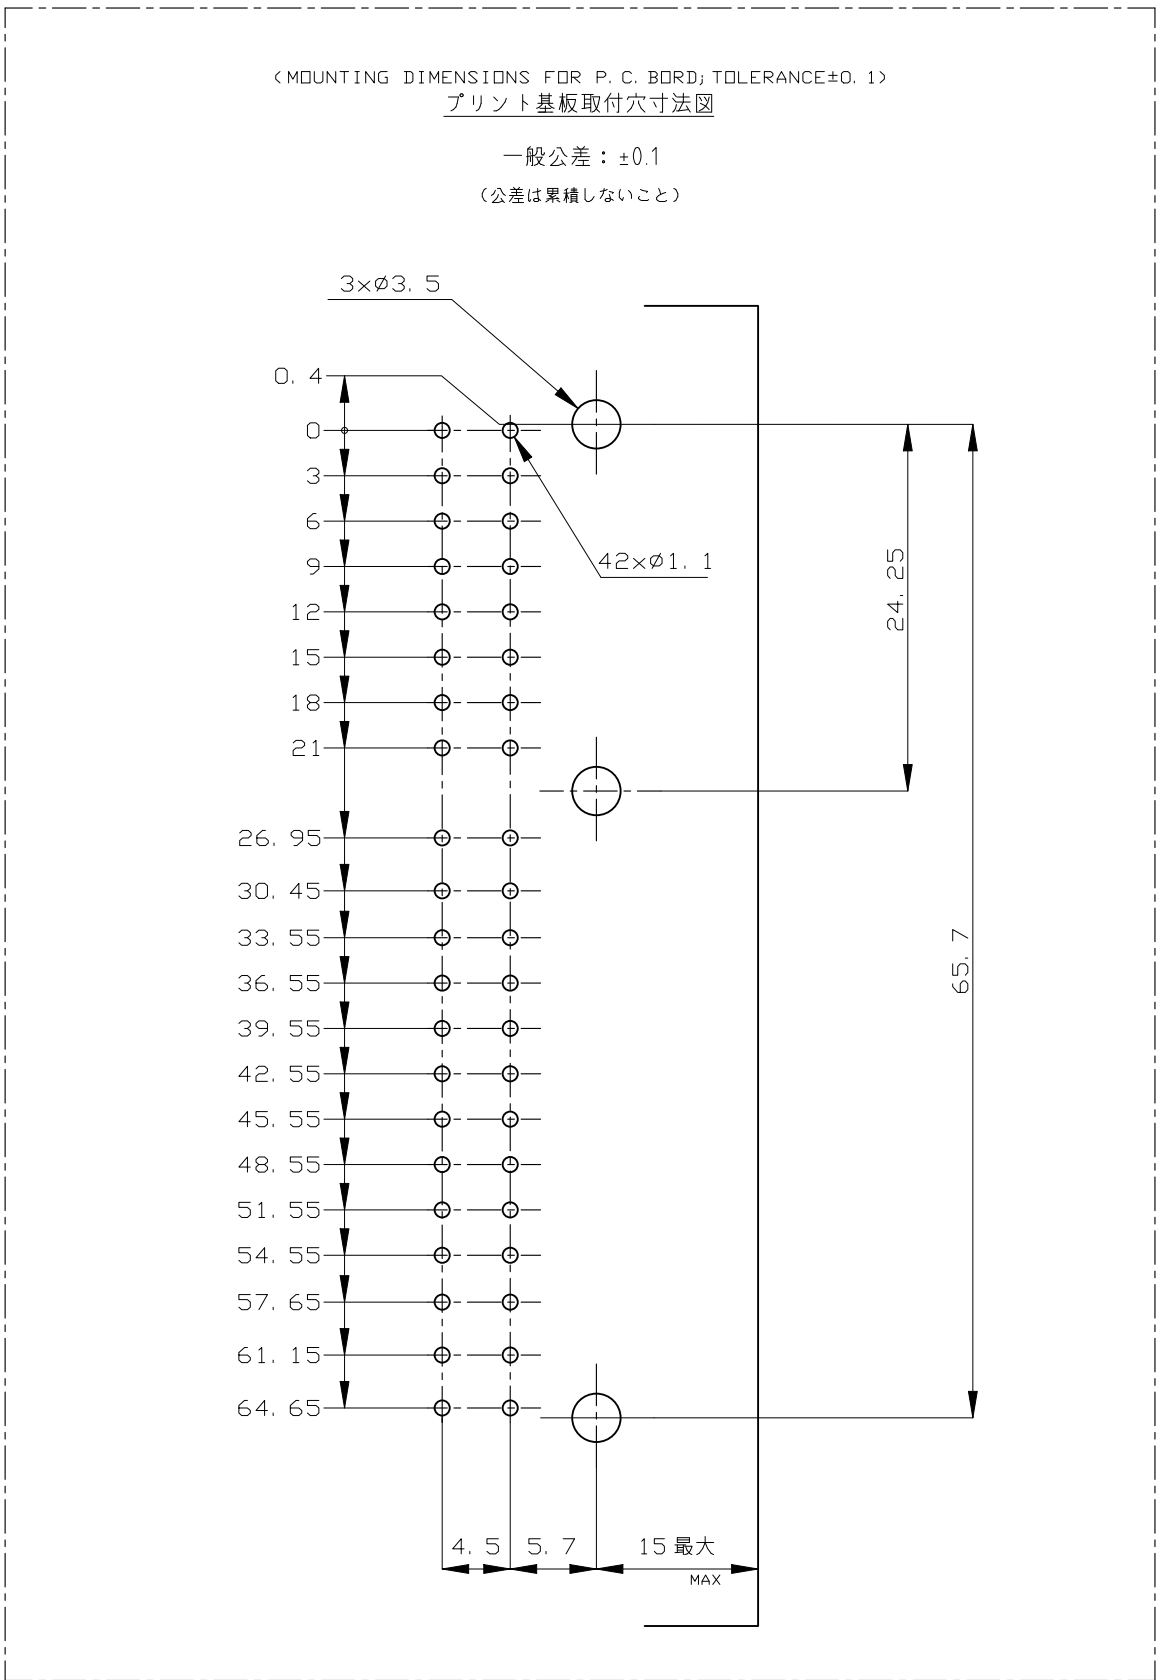
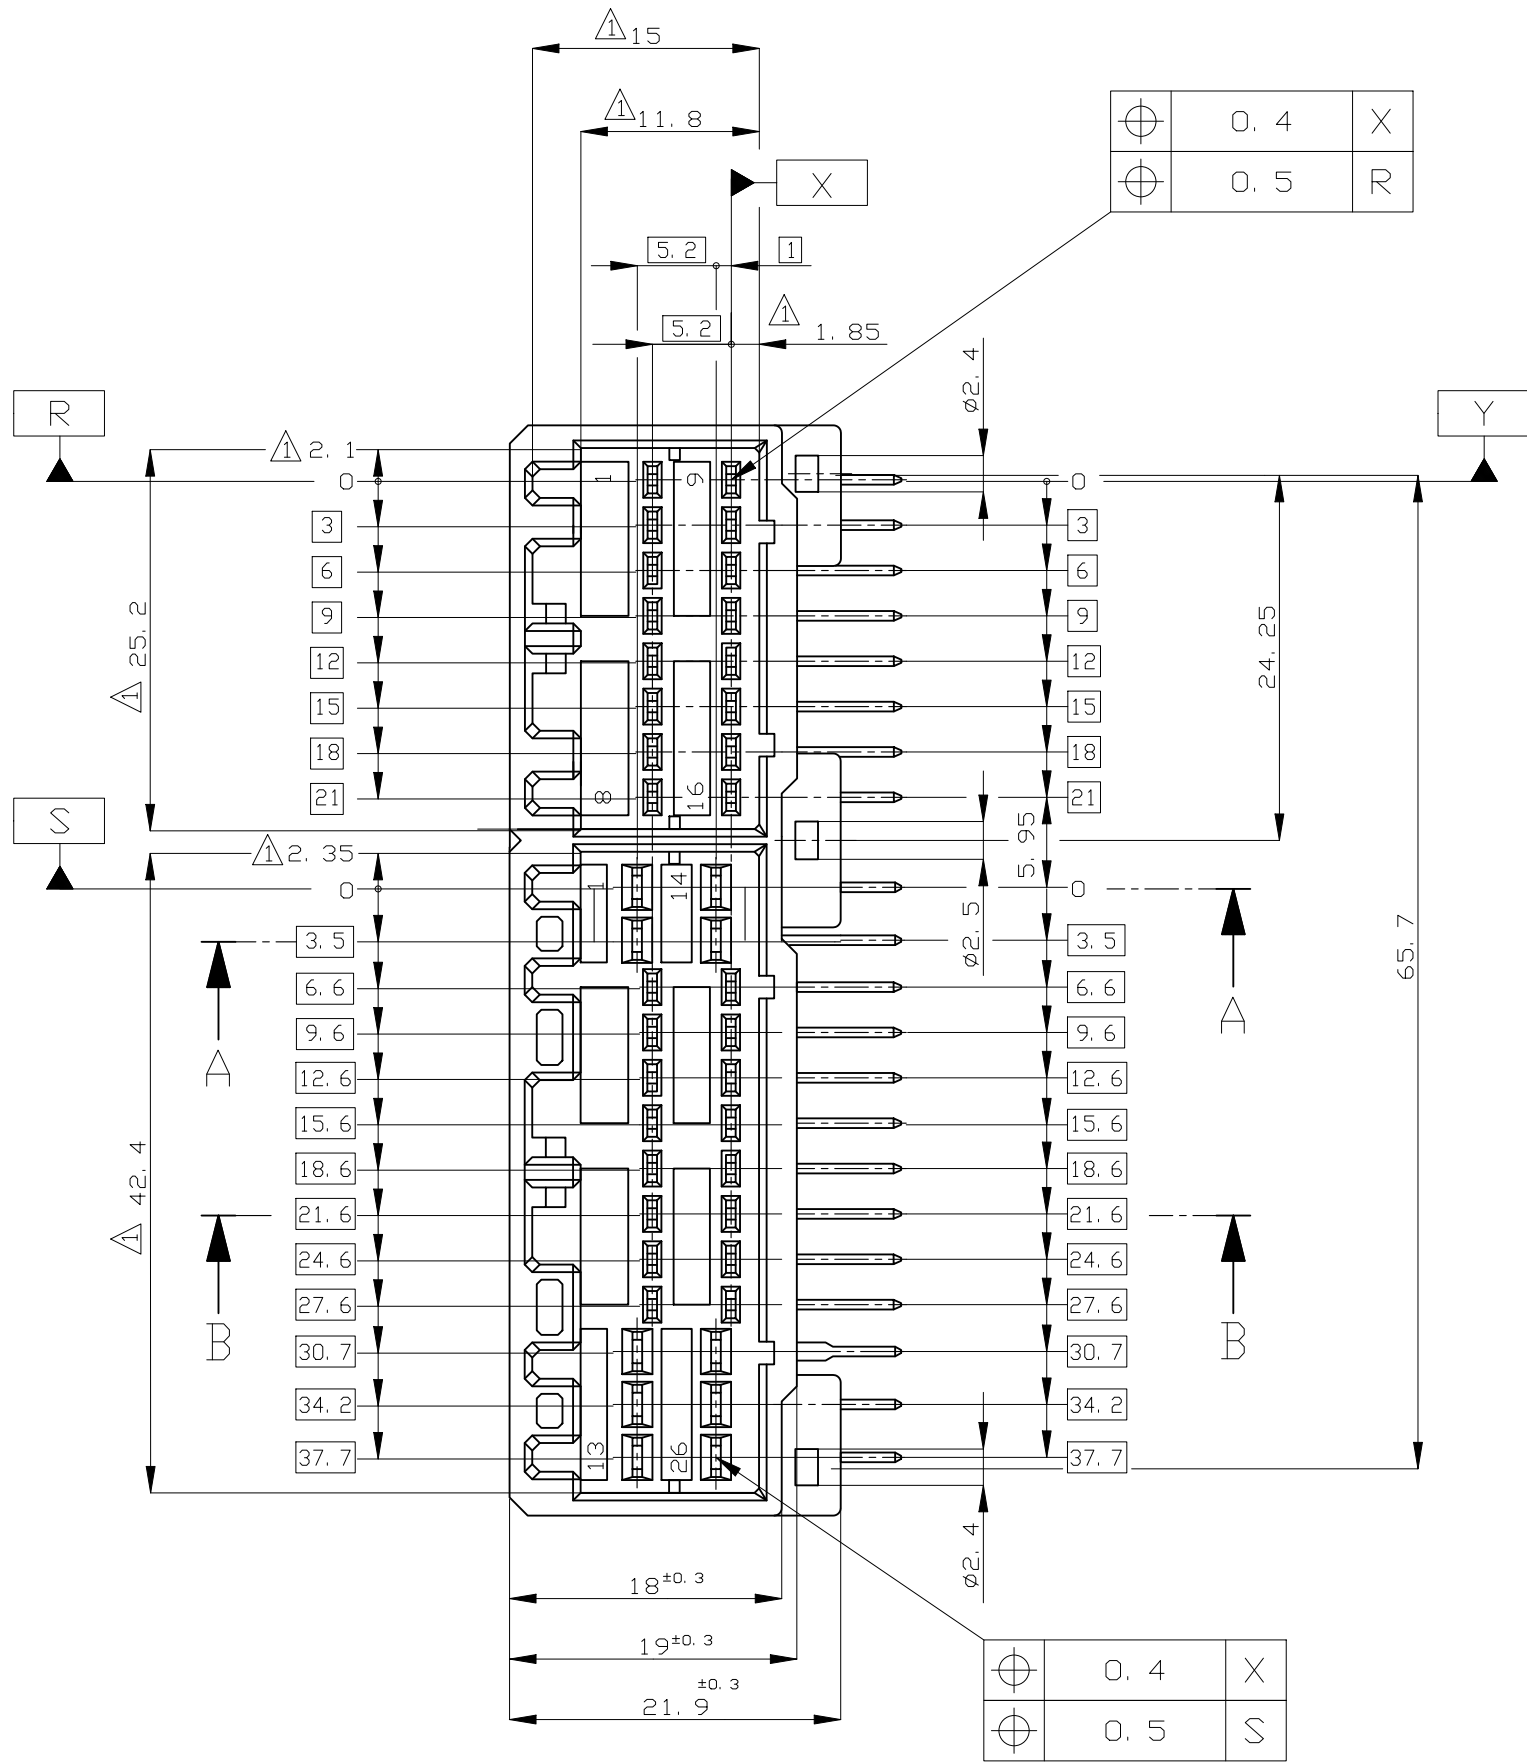
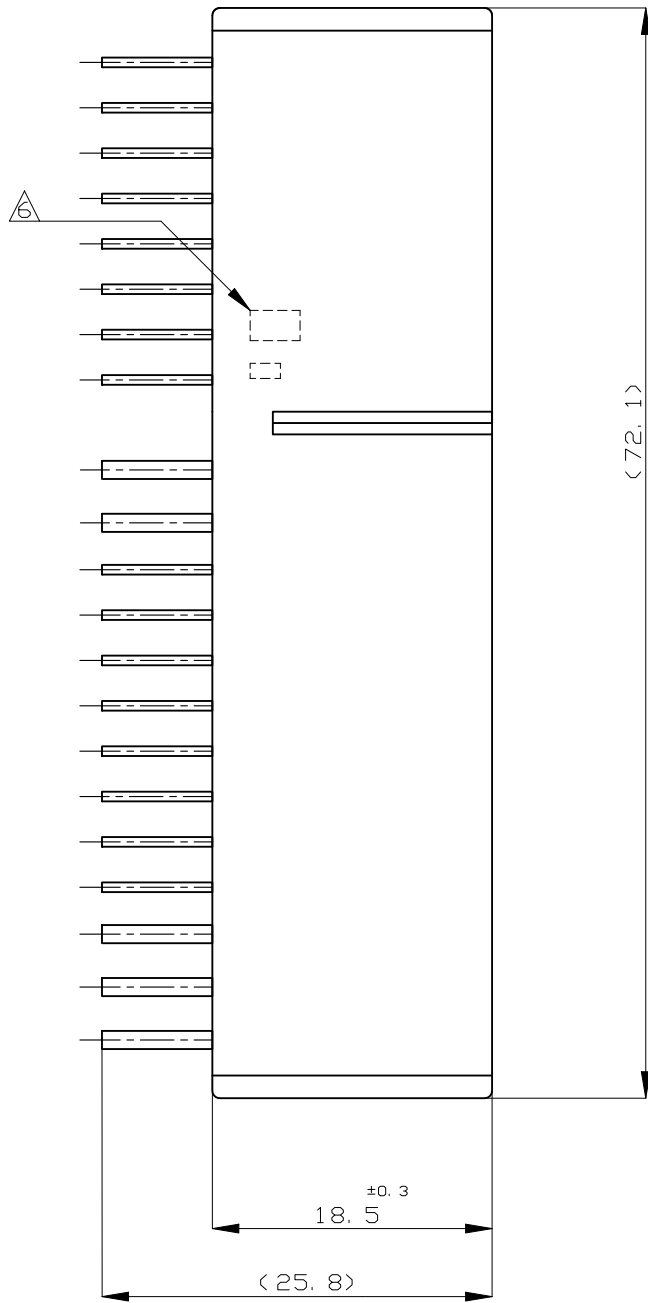



D

C

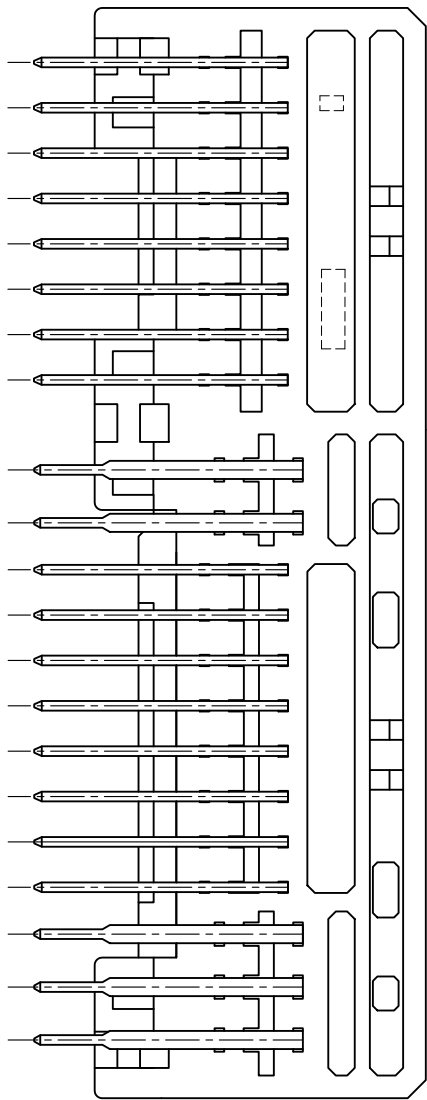



- △ □ 面から2mmの範囲で測定
- 嵌合相手ハウジング型 174514, 174516, 917981, 917992
 - 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
 - 適用製品規格番号: 108-5280, 5342

△ 回路番号:
パワー回路 ①~⑩
シグナル回路 ⑪~④②

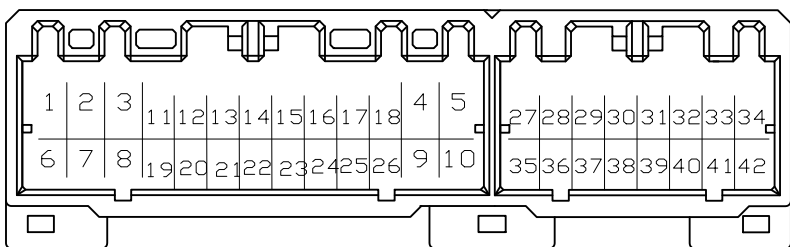

△ コンタクト仕上識別マーク

- △ MUST BE KEPT BETWEEN □ Z AND 2
- THE MATING PLUG HSG. PART NUMBER; 174514, 174516, 917981, 917992
 - RECOMMENDED MOUNTING SCREW; 3mm DIA, 6mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE; 0.4N-m (4kg-cm) MAX.)
 - APPLICABLE PRODUCT SPEC NO.; 108-5280, 108-5342
- △ CIRCUIT NUMBER
POWER CIRCUIT NO. ①~⑩
SIGNAL CIRCUIT NO. ⑪~④②
- △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

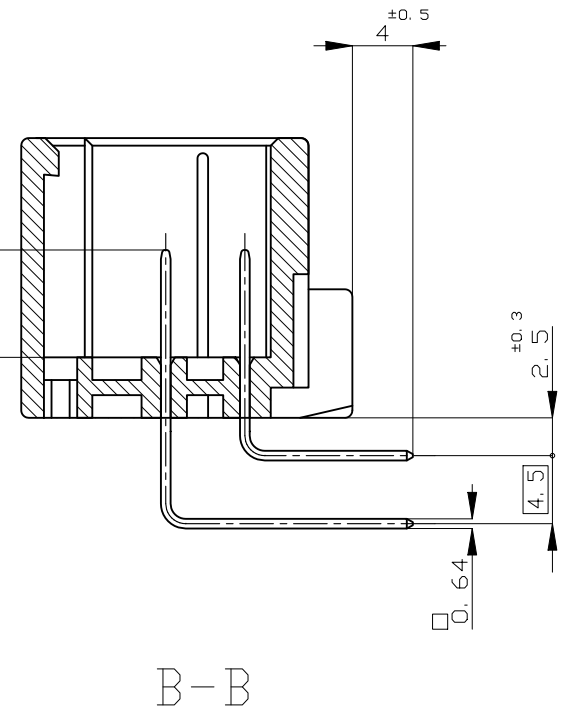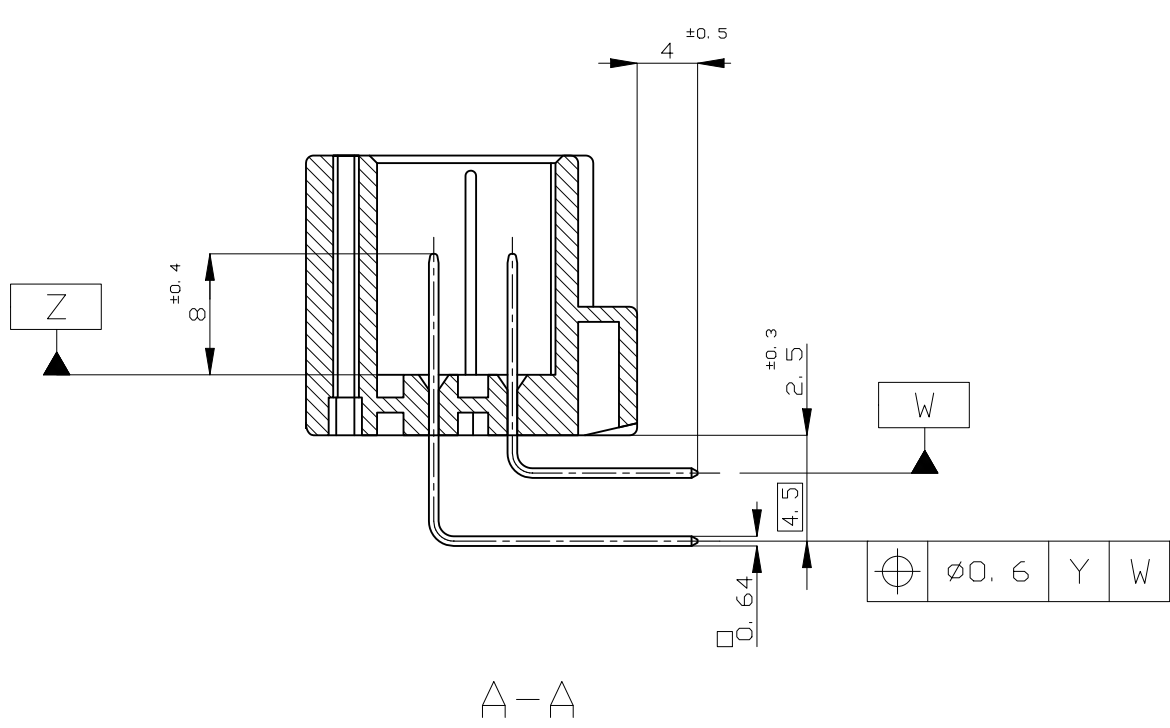

OBsolete	54	SELECTIVE-TIN (MATTE)	PRE-TINNED × 31	SELECTIVE GOLD × 11	⑩	②⑦-③③ ③④-③⑤ ③⑥-③⑦	GRAY 灰色	4-5175446-6
OBsolete	59	SELECTIVE-TIN (MATTE)	PRE-TINNED × 40	SELECTIVE GOLD × 2	///	①③-③③	GRAY 灰色	9-5175446-6
	58	SELECTIVE-TIN (MATTE)	PRE-TINNED × 26	SELECTIVE GOLD × 16	///	①①-③③	GRAY 灰色	8-5175446-6
	58	SELECTIVE-TIN (MATTE)	PRE-TINNED × 26	SELECTIVE GOLD × 16	///	①①-③③	NATURAL 自然色	8-5175446-1
	56	SELECTIVE-TIN (MATTE)	PRE-TINNED × 25	SELECTIVE GOLD × 17	⑨	②⑦-④②	NATURAL 自然色	6-5175446-1
	54	SELECTIVE-TIN (MATTE)	PRE-TINNED × 34	SELECTIVE GOLD × 8	///	①①-③③	NATURAL 自然色	4-5175446-1
OBsolete	53	SELECTIVE-TIN (MATTE)	PRE-TINNED × 36	SELECTIVE GOLD × 6	///	③③ ③④ ③⑤ ③⑥ ③⑦ ③⑧	GRAY 灰色	3-5175446-6
OBsolete	53	SELECTIVE-TIN (MATTE)	PRE-TINNED × 34	SELECTIVE GOLD × 8	///	①③ ①④ ①⑤ ①⑥ ①⑦ ①⑧ ①⑨ ①⑩	NATURAL 自然色	3-5175446-1
	52	SELECTIVE-TIN (MATTE)	PRE-TINNED × 10	SELECTIVE GOLD × 32	///	①①-④②	GRAY 灰色	2-5175446-6
OBsolete	52	SELECTIVE-TIN (MATTE)	PRE-TINNED × 10	SELECTIVE GOLD × 32	///	①①-④②	NATURAL 自然色	2-5175446-1
OBsolete	55	SELECTIVE-TIN (MATTE)	PRE-TINNED × 30	SELECTIVE GOLD × 12	///	③①-③③ ③④-③⑤ ③⑥-③⑦ ③⑧-③⑨	NATURAL 自然色	5-5175446-1
	9	TIN-LEAD	PRE-TINNED × 40	SELECTIVE GOLD × 2	///	①③ ③③	GRAY 灰色	9-175446-6
OBsolete	8	TIN-LEAD	PRE-TINNED × 26	SELECTIVE GOLD × 16	///	①①-③③	GRAY 灰色	8-175446-6
OBsolete	8	TIN-LEAD	PRE-TINNED × 26	SELECTIVE GOLD × 16	///	①①-③③	BLACK 黒色	8-175446-2
OBsolete	8	TIN-LEAD	PRE-TINNED × 26	SELECTIVE GOLD × 16	///	①①-③③	NATURAL 自然色	8-175446-1
OBsolete	7	TIN-LEAD	PRE-TINNED × 39	SELECTIVE GOLD × 3	///	①④ ①⑤ ③③	GRAY 灰色	7-175446-5
	6	TIN-LEAD	PRE-TINNED × 25	SELECTIVE GOLD × 17	⑨	②⑦-④②	NATURAL 自然色	6-175446-1
	5	TIN-LEAD	PRE-TINNED × 30	SELECTIVE GOLD × 12	///	③①-③③ ③④-③⑤ ③⑥-③⑦ ③⑧-③⑨	NATURAL 自然色	5-175446-1
OBsolete	4	TIN-LEAD	PRE-TINNED × 31	SELECTIVE GOLD × 11	⑩	②⑦-③③ ③④-③⑤ ③⑥-③⑦ ③⑧-③⑨	GRAY 灰色	4-175446-6
OBsolete	4	TIN-LEAD	PRE-TINNED × 34	SELECTIVE GOLD × 8	///	①①-③③	NATURAL 自然色	4-175446-1
OBsolete	3	TIN-LEAD	PRE-TINNED × 36	SELECTIVE GOLD × 6	///	③③ ③④ ③⑤ ③⑥ ③⑦ ③⑧	GRAY 灰色	3-175446-6
	3	TIN-LEAD	PRE-TINNED × 34	SELECTIVE GOLD × 8	///	①③ ①④ ①⑤ ①⑥ ①⑦ ①⑧ ①⑨ ①⑩	NATURAL 自然色	3-175446-1
	2	TIN-LEAD	PRE-TINNED × 10	SELECTIVE GOLD × 32	///	①①-④②	GRAY 灰色	2-175446-6
	0	PRE-TINNED	銀めっき × 42		///	///	GRAY 灰色	175446-6
	1	SELECTIVE-TIN (MATTE)	銀めっき × 42	SELECTIVE-TIN (銀めっき) × 42	///	///	NATURAL 自然色	175446-2
	0	PRE-TINNED	銀めっき × 42		///	///	NATURAL 自然色	175446-1
△ MARKING マーキング	SOLDERING STYLE 半田付け形		FINISH OF CONTACT 仕上	CONTACT SIDE 接点側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	HOUSING COLOR ハウジング色	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 寸
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED
公差

0. PLC ±
1. PLC ±
2. PLC ±
3. PLC ±
4. PLC ±
ANGLES ±

MATERIAL
材料

HOUSING: PBT
CONTACT: BRASS

FINISH
仕上

SEE TABLE
表参照

DWN
M. KADOSAKI
17MAY05

CHK
T. SHINOHARA
17MAY05

APVD
K. RETSUJI
17MAY05

NAME
氏名

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

SIZE
寸法

CAGE CODE
 cage code

DRAWING NO.
図番

RESTRICTED TO
制限

WEIGHT
重量

21.3 g

CUSTOMER DRAWING

SCALE
尺度

2:1

SHEET
シート

1 OF 1

REV
改定

N12

4805 (1/15)