

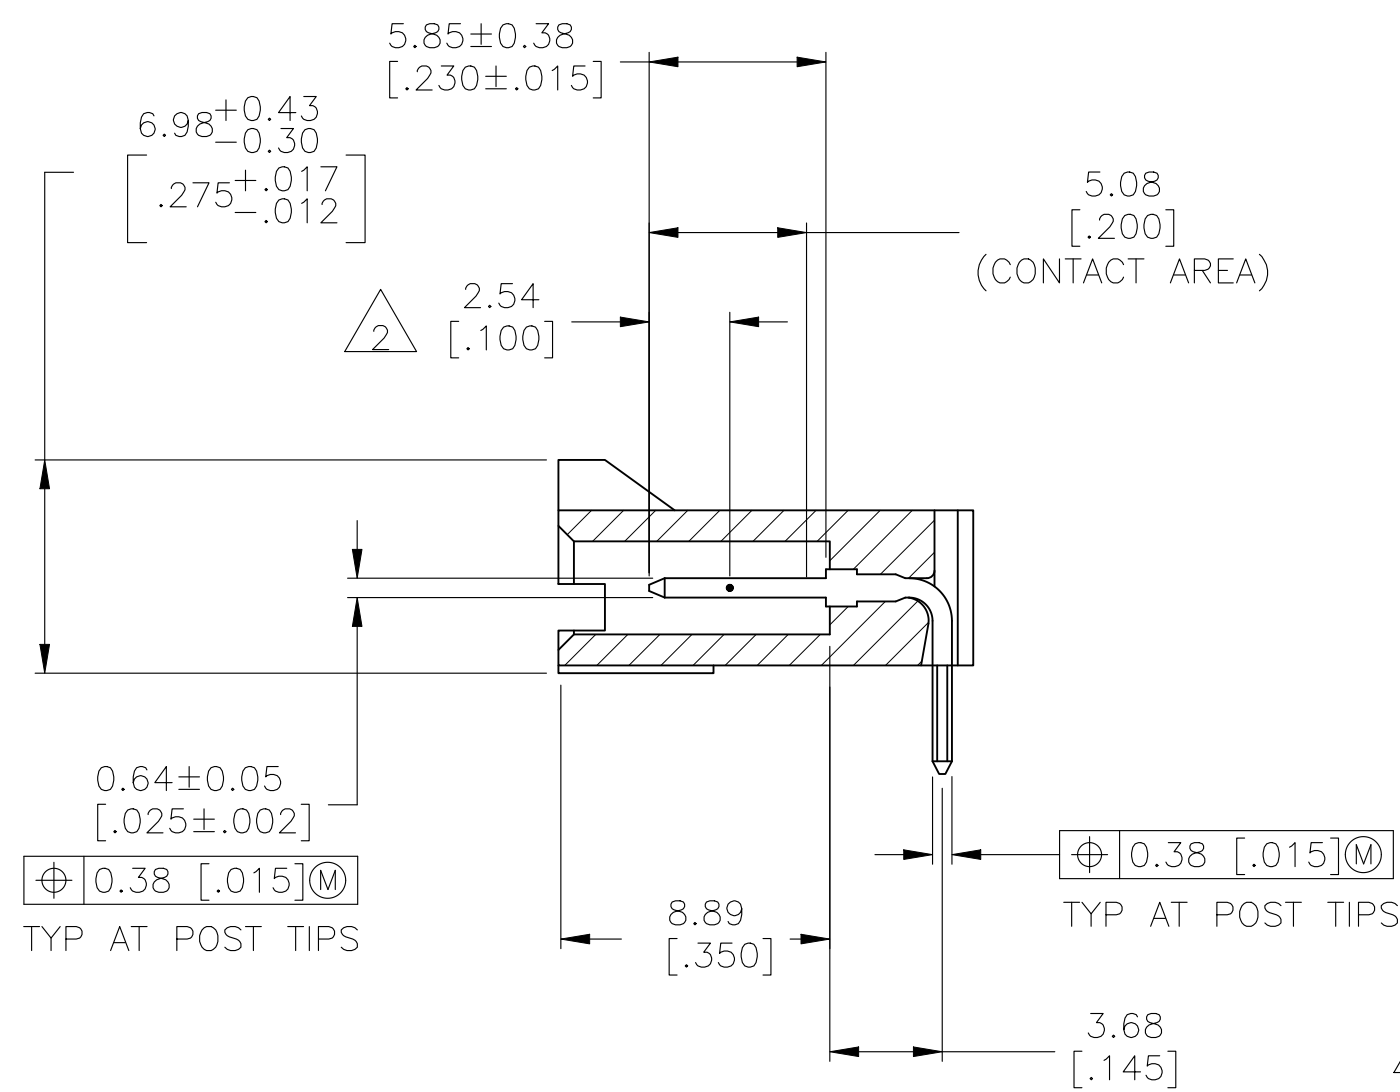
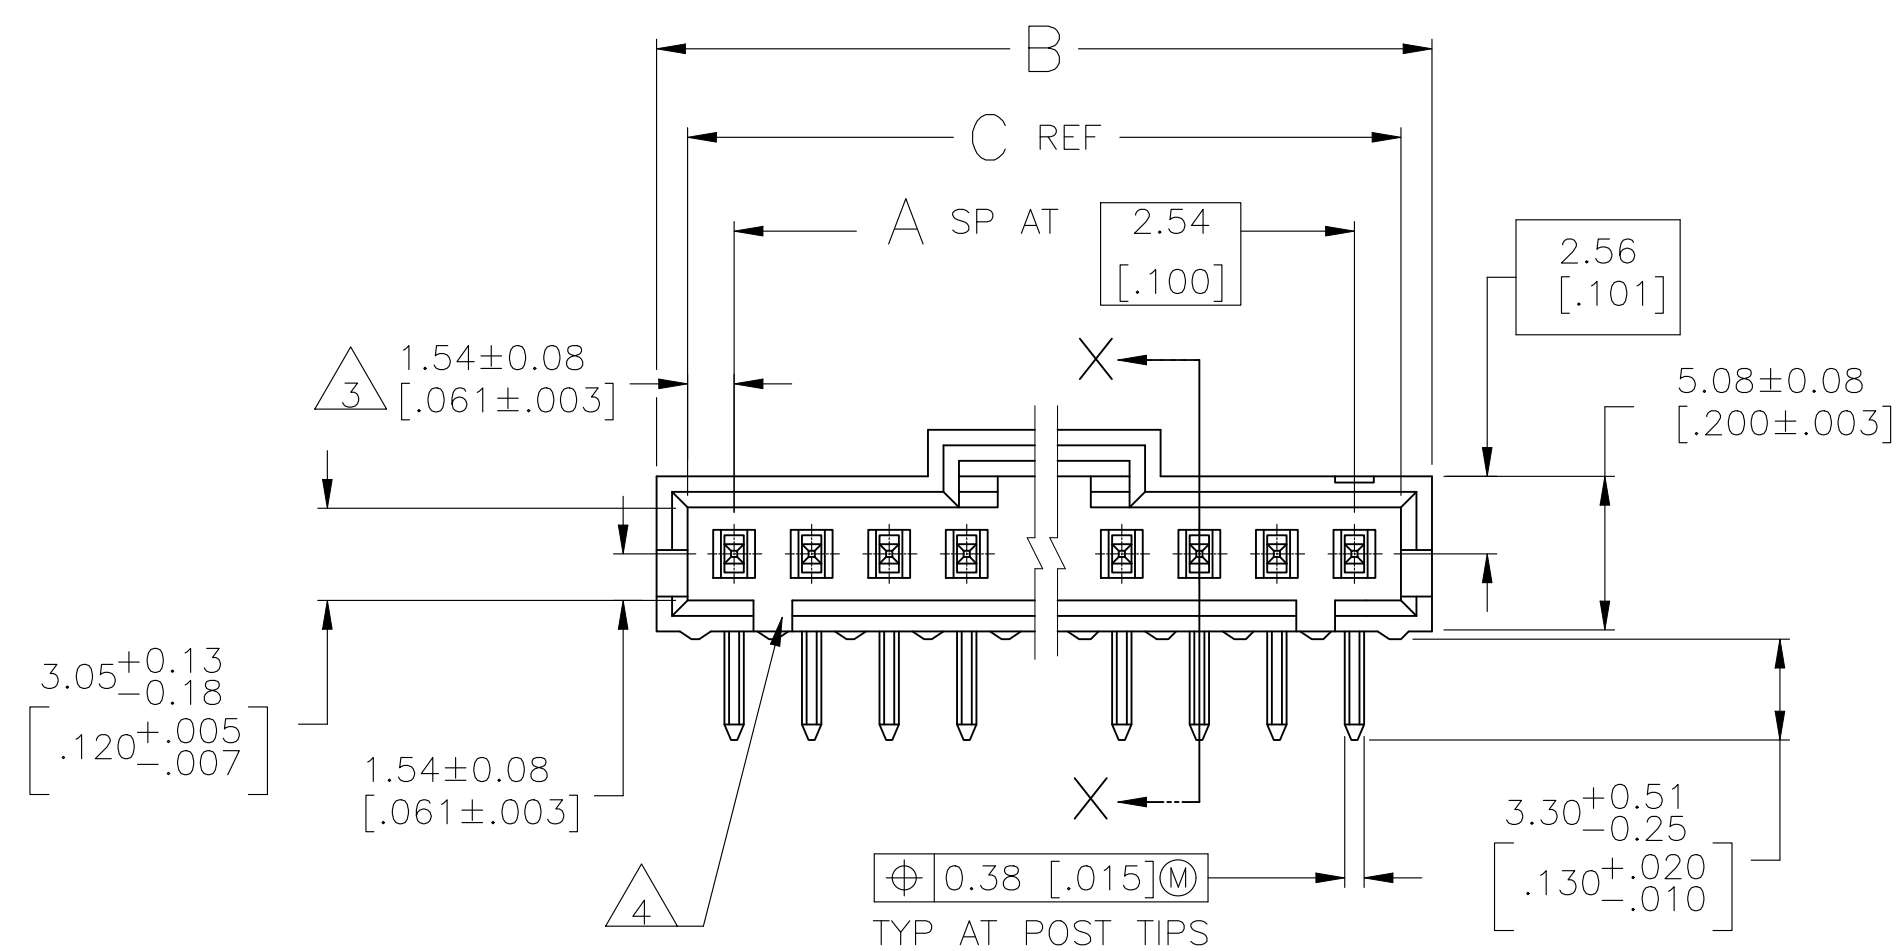


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V2	ECR-25-239014	18APR2025	ABS	PS

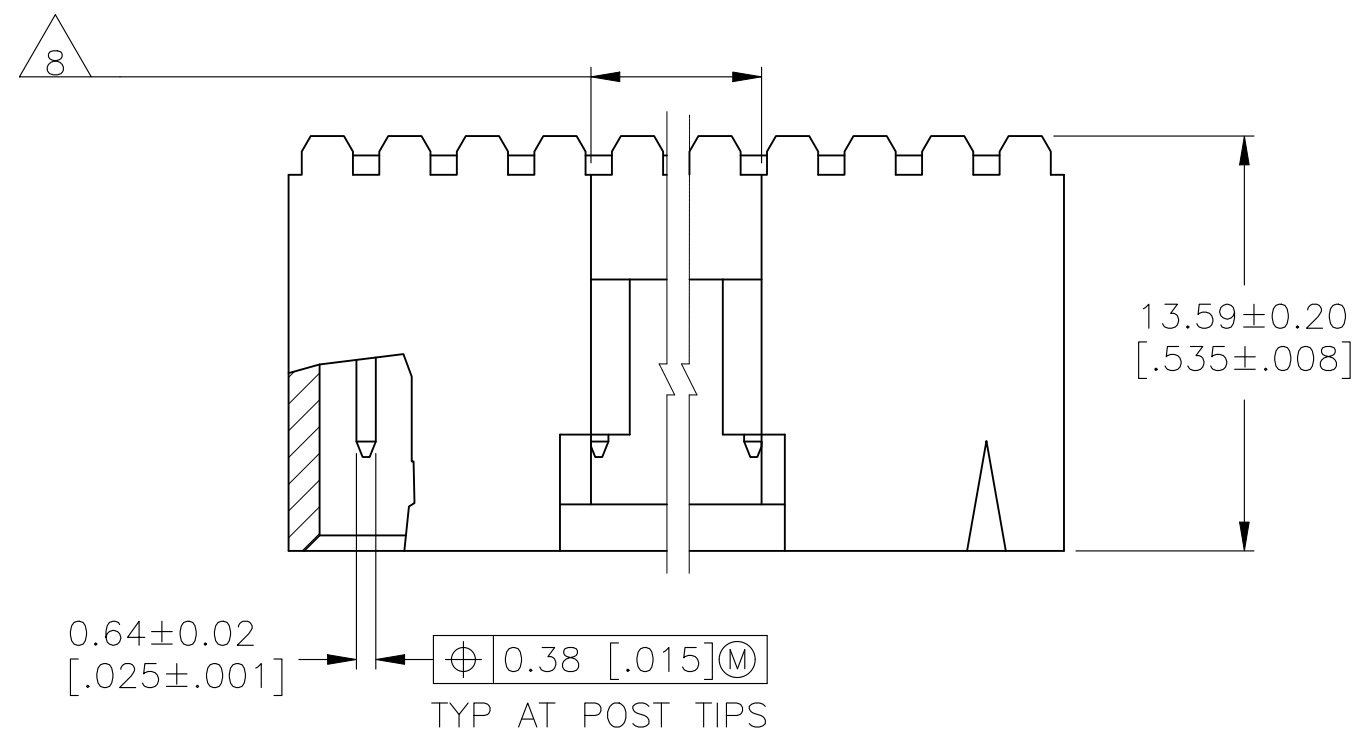


SECTION X-X

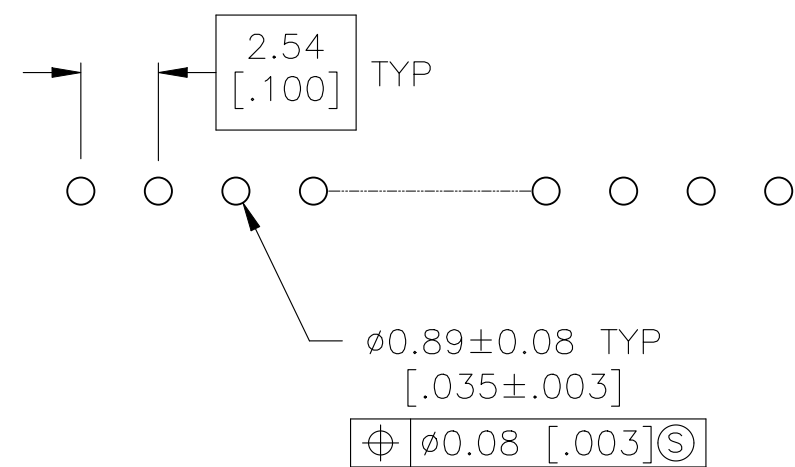

RECOMMENDED HOLE LAYOUT

- 1 .00038 [.000015] GOLD IN THE CONTACT AREA,
.00254 [.000100] MATTE TIN-LEAD ON THE REMAINDER OF CONTACT,
ALL OVER .00127 [.000050] NICKEL.
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION
OF THE POST AND THE HOUSING.
- 4 ON ASSEMBLIES WITH FOUR OR MORE POSITIONS,
TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS,
ONE POLARIZATION SLOT.
- 5 .00038 [.000015] GOLD IN THE CONTACT AREA,
.00254 [.000100] MATTE TIN ON THE REMAINDER OF CONTACT,
ALL OVER .00127 [.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF

	OBSOLETE	△₆	△₁	64.01 [2.520]	65.91 [2.595]	24	25	2-103635-4-
SUPERSEDED BY 7-103635-3			△₁	61.47 [2.420]	63.37 [2.495]	23	24	2-103635-3
△₇	OBSOLETE		△₁	58.93 [2.320]	60.83 [2.395]	22	23	2-103635-2-
△₇	OBSOLETE		△₁	56.39 [2.220]	58.29 [2.295]	21	22	2-103635-1-
△₇	OBSOLETE		△₁	53.85 [2.120]	55.75 [2.195]	20	21	2-103635-0-
			△₁	51.31 [2.020]	53.21 [2.095]	19	20	1-103635-9
△₇	OBSOLETE		△₁	48.77 [1.920]	50.67 [1.995]	18	19	1-103635-8-
			△₁	46.23 [1.820]	48.13 [1.895]	17	18	1-103635-7
SUPERSEDED BY 6-103635-6			△₁	43.69 [1.720]	45.59 [1.795]	16	17	1-103635-6-
SUPERSEDED BY 6-103635-5			△₁	41.15 [1.620]	43.05 [1.695]	15	16	1-103635-5
SUPERSEDED BY 6-103635-4			△₁	38.61 [1.520]	40.51 [1.595]	14	15	1-103635-4
SUPERSEDED BY 6-103635-3			△₁	36.07 [1.420]	37.97 [1.495]	13	14	1-103635-3
			△₁	33.53 [1.320]	35.43 [1.395]	12	13	1-103635-2
			△₁	30.99 [1.220]	32.89 [1.295]	11	12	1-103635-1
SUPERSEDED BY 6-103635-0			△₁	28.45 [1.120]	30.35 [1.195]	10	11	1-103635-0
			△₁	25.91 [1.020]	27.81 [1.095]	9	10	103635-9
SUPERSEDED BY 5-103635-8			△₁	23.37 [.920]	25.27 [.995]	8	9	103635-8
			△₁	20.83 [.820]	22.73 [.895]	7	8	103635-7
SUPERSEDED BY 5-103635-6			△₁	18.29 [.720]	20.19 [.795]	6	7	103635-6
			△₁	15.75 [.620]	17.65 [.695]	5	6	103635-5
		△₁	13.21 [.520]	15.11 [.595]	4	5	103635-4	
		△₁	10.67 [.420]	12.57 [.495]	3	4	103635-3	
		△₁	8.13 [.320]	10.03 [.395]	2	3	103635-2	
		△₁	5.59 [.220]	7.49 [.295]	1	2	103635-1	
		REMARK	PLATING	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 5-3-91 S. SHUEY CHK 27-3-91 L. CASTAGNA APVD 27-3-91		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME H0RASSY,RTANG,SGLEROW 2.54[.100]C/L0.64[.025]S0PST WITHPLZN&LATCHING,AMPMDUMUTE	
		PRODUCT SPEC 103-25034			
		APPLICATION SPEC 114-25026			
		WEIGHT —			
MATERIAL HOUSING RETARDANT UL94V-0 BLACK CONTACT: BRASS		SIZE CASE CODE DRAWING NO A1 00779 C=103636		RESTRICTED TO:	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 2 REV V2	

