

© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AB1	REVISED PER ECN-26-381559	23DEC2025	AP	SKN

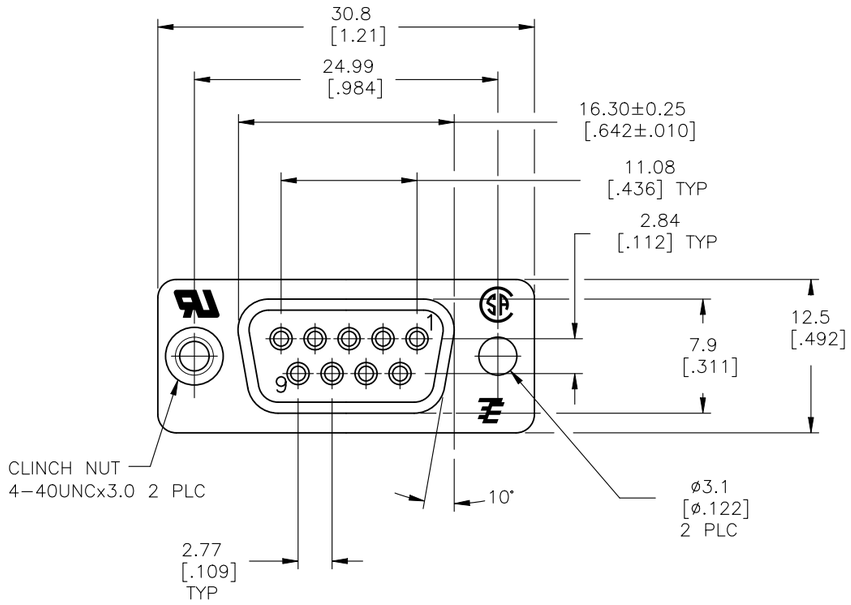

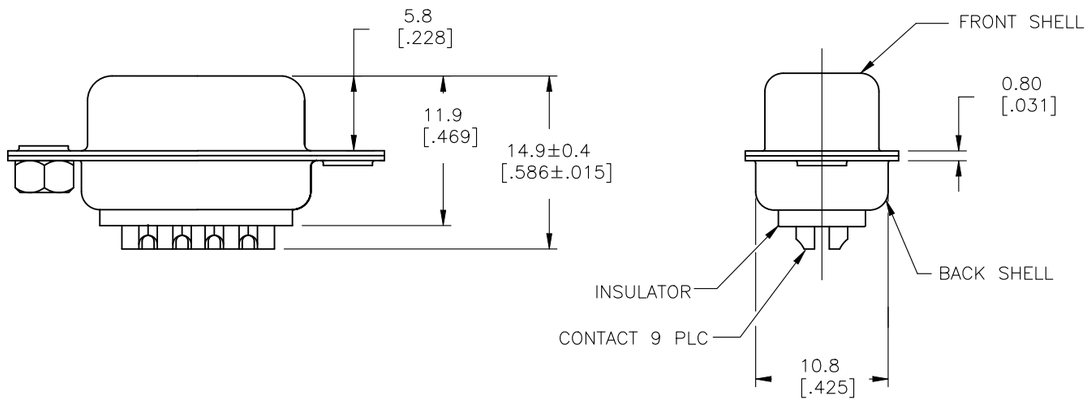

1. MATERIAL:
FRONT INSULATOR: PBT, 30 %GF, UL94V-0, BLACK COLOR
BACK INSULATOR: PBT, 30 %GF, UL94V-0, BLACK COLOR
CONTACT: BRASS
FRONT & BACK SHELL: STEEL
CLINCH NUTS: BRASS

2. FINISH:
CONTACT: GOLD PLATING 0.00002[.0000008] MIN ON CONTACT AREA 0.00229[.000090] MIN TIN-LEAD PLATING ALL OVER 0.00127[.000050] MIN NICKEL

3. CONTACT: GOLD PLATING 0.00076[.000030] MIN ON CONTACT AREA 0.00229[.000090] MIN TIN-LEAD PLATING ALL OVER 0.00127[.000050] MIN NICKEL

4. SHELL: BRIGHT TIN 0.00241[.000095] MIN FULL SHELL

5. SHELL: BLUE ZINC: 0.00508[.000200] – 0.00762[.000300] OVER ENTIRE SHELL

6. CONTACT: GOLD PLATING 0.00002[.0000008] MIN ON CONTACT AREA 0.00229[.000090] MIN HOT DIPPED TIN-COPPER PLATING ALL OVER 0.00127[.000050] MIN NICKEL

7. CLINCH NUTS: NICKEL PLATING .00305-.00508[.000120-.000200]

8. SPECIFICATION
ELECTRICAL CHARACTERISTICS: CURRENT RATING: 3 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V r.m.s
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM AT DC 500V
CONTACT RESISTANCE: 10 MILLIOHMS MAXIMUM.

9. RECEPTACLE ASSEMBLY MATES WITH ANY 9 POSITION PLUG IN AMPLIMITE SERIES

10. SOLDER CUP WILL ACCOMODATE 20 AWG MAX WIRE.

11. ROHS 2002/95/EC/COMPLIANT

12. CONTACT: GOLD PLATING 0.00076[.000030] MIN OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.00076[.000030] MIN ON CONTACT AREA 0.00229[.000090] MIN HOT DIPPED TIN-COPPER ALL OVER 0.00127[.000050] MIN NICKEL PLATING

	PACKAGING TYPE	7 CLINCH NUTS	CONTACTS	SHELLS	PART NO.
11 OBSOLETE	STANDARD	NO	6	5	5-747905-4
11	STANDARD	YES	6	4	5-747905-7
11	STANDARD	NO	12	4	5-747905-5
11	STANDARD	NO	6	4	5-747905-2
SUPERSEDED TO 5-747905-2 11	STANDARD	NO	6	4	747905-8
SUPERSEDED TO 5-747905-7	STANDARD	YES	2	4	747905-7
SUPERSEDED TO 5-747905-5	STANDARD	NO	3	4	747905-5
SUPERSEDED TO 5-747905-4	STANDARD	NO	2	5	747905-4
SUPERSEDED TO 5-747905-2	STANDARD	NO	2	4	747905-2

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.25
2 PLC ± 0.13
3 PLC ± 0.05
4 PLC ± –
ANGLES ± –

MATERIAL 1

FINISH SEE TABLE

DWN M.BINNER 03MAR03
CHK R.BENDORF 05MAR03
APVD R.BENDORF 05MAR03
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
RECEPTACLE ASSEMBLY, SOLDER CUP, SIZE 1, 9 POSITION, AMPLMITE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-747905	—

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV AB1