
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
-	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-21-100678	08APR2021	SS	VS
	D	REVISED PER ECR-23-219171	29JUN2023	MC	DS

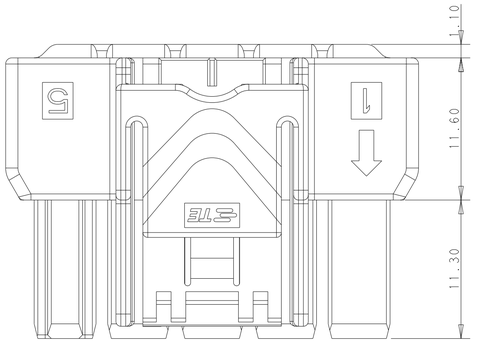


POS.	DIM.A
3*5	33.70
3*4	27.70
3*3	21.70

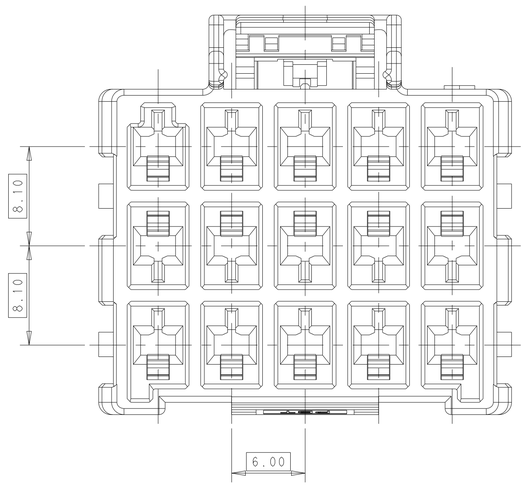

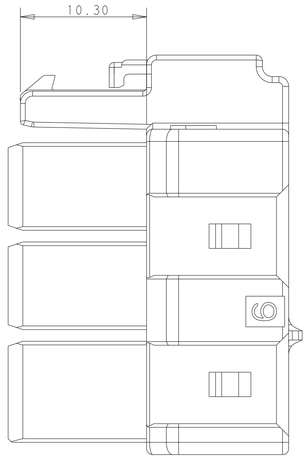

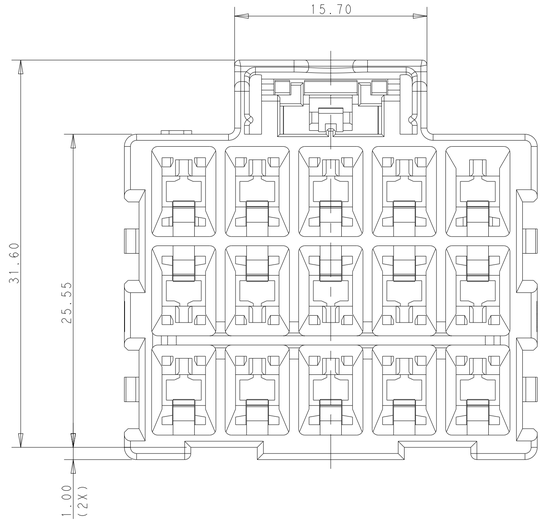

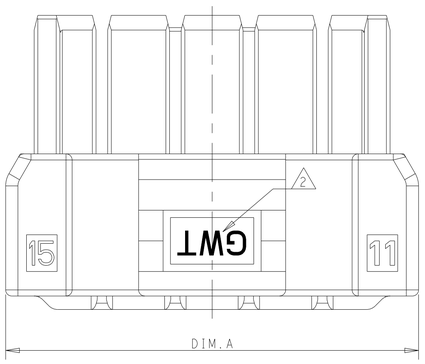

1 MATERIAL:
LEVEL A:PA66,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2 MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*

4. MATING CONN. P/N
CAP HSG:*-2232356/60-*
DOUBLE ROW TPA:*-1971778-*;SINGLE ROW TPA:*-1971777-*

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1
FINISH - -

DWN TOMMY WU 26MAR2013
CHK HAPYE WU 26MAR2013
APVD YUHONG MAO 26MAR2013
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME PLUG HOUSING,TRIPLE ROW POWER TRIPLE LOCK -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2232357	-


Customer Drawing | SCALE 3:1 | SHEET 1 OF 2 | REV D


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
-	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	-SEE SHEET 1-	-	-	-

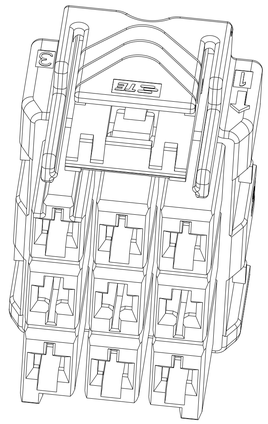

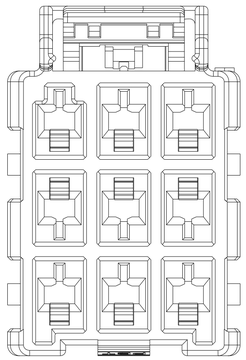



3*3 POSITIONS

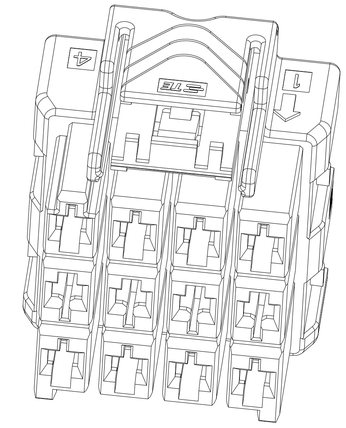

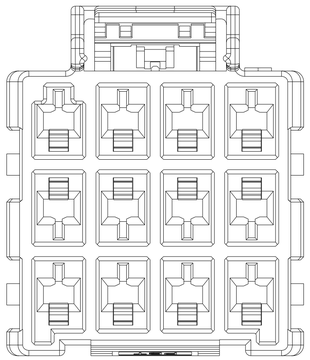

3*4 POSITIONS

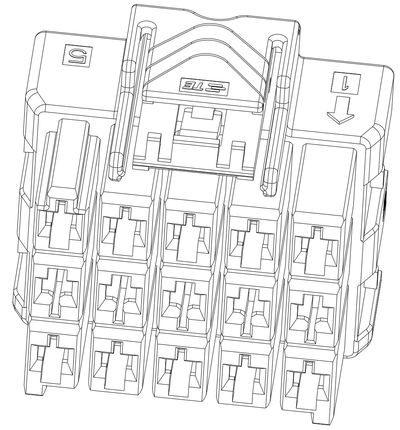


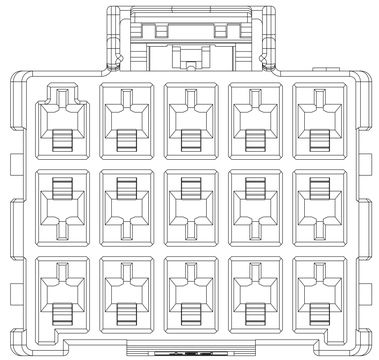


3*5 POSITIONS

3*5	LEVEL A	DARK GREY	KEY A	5-2232357-7
		BROWN	KEY B	6-2232357-7
		GREEN	KEY C	7-2232357-7
		ORANGE	KEY D	8-2232357-7
	LEVEL B	BLACK	KEY A	1-2232357-5
3*4	LEVEL A	DARK GREY	KEY A	5-2232357-4
		BROWN	KEY B	6-2232357-4
		GREEN	KEY C	7-2232357-4
		ORANGE	KEY D	8-2232357-4
	LEVEL B	BLACK	KEY A	1-2232357-4
3*3	LEVEL A	DARK GREY	KEY A	5-2232357-3
		BROWN	KEY B	6-2232357-3
		GREEN	KEY C	7-2232357-3
		ORANGE	KEY D	8-2232357-3
	LEVEL B	BLACK	KEY A	1-2232357-6
POS.	MATERIAL	COLOR	KEY	P/N


KEY A




KEY B



KEY C




KEY D




KEYING FOR 3*3 POS.


KEY A




KEY B



KEY C




KEY D




KEYING FOR 3*4 POS.


KEY A

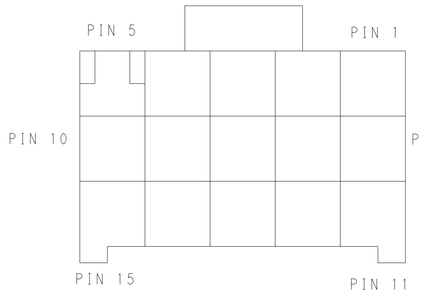


KEY B



KEY C



KEY D



KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH - -

DWN TOMMY WU 26MAR2013
CHK HAPYE WU 26MAR2013
APVD YUHONG MAO 26MAR2013
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2232357	-

Customer Drawing | SCALE - | SHEET 2 OF 2 | REV D