



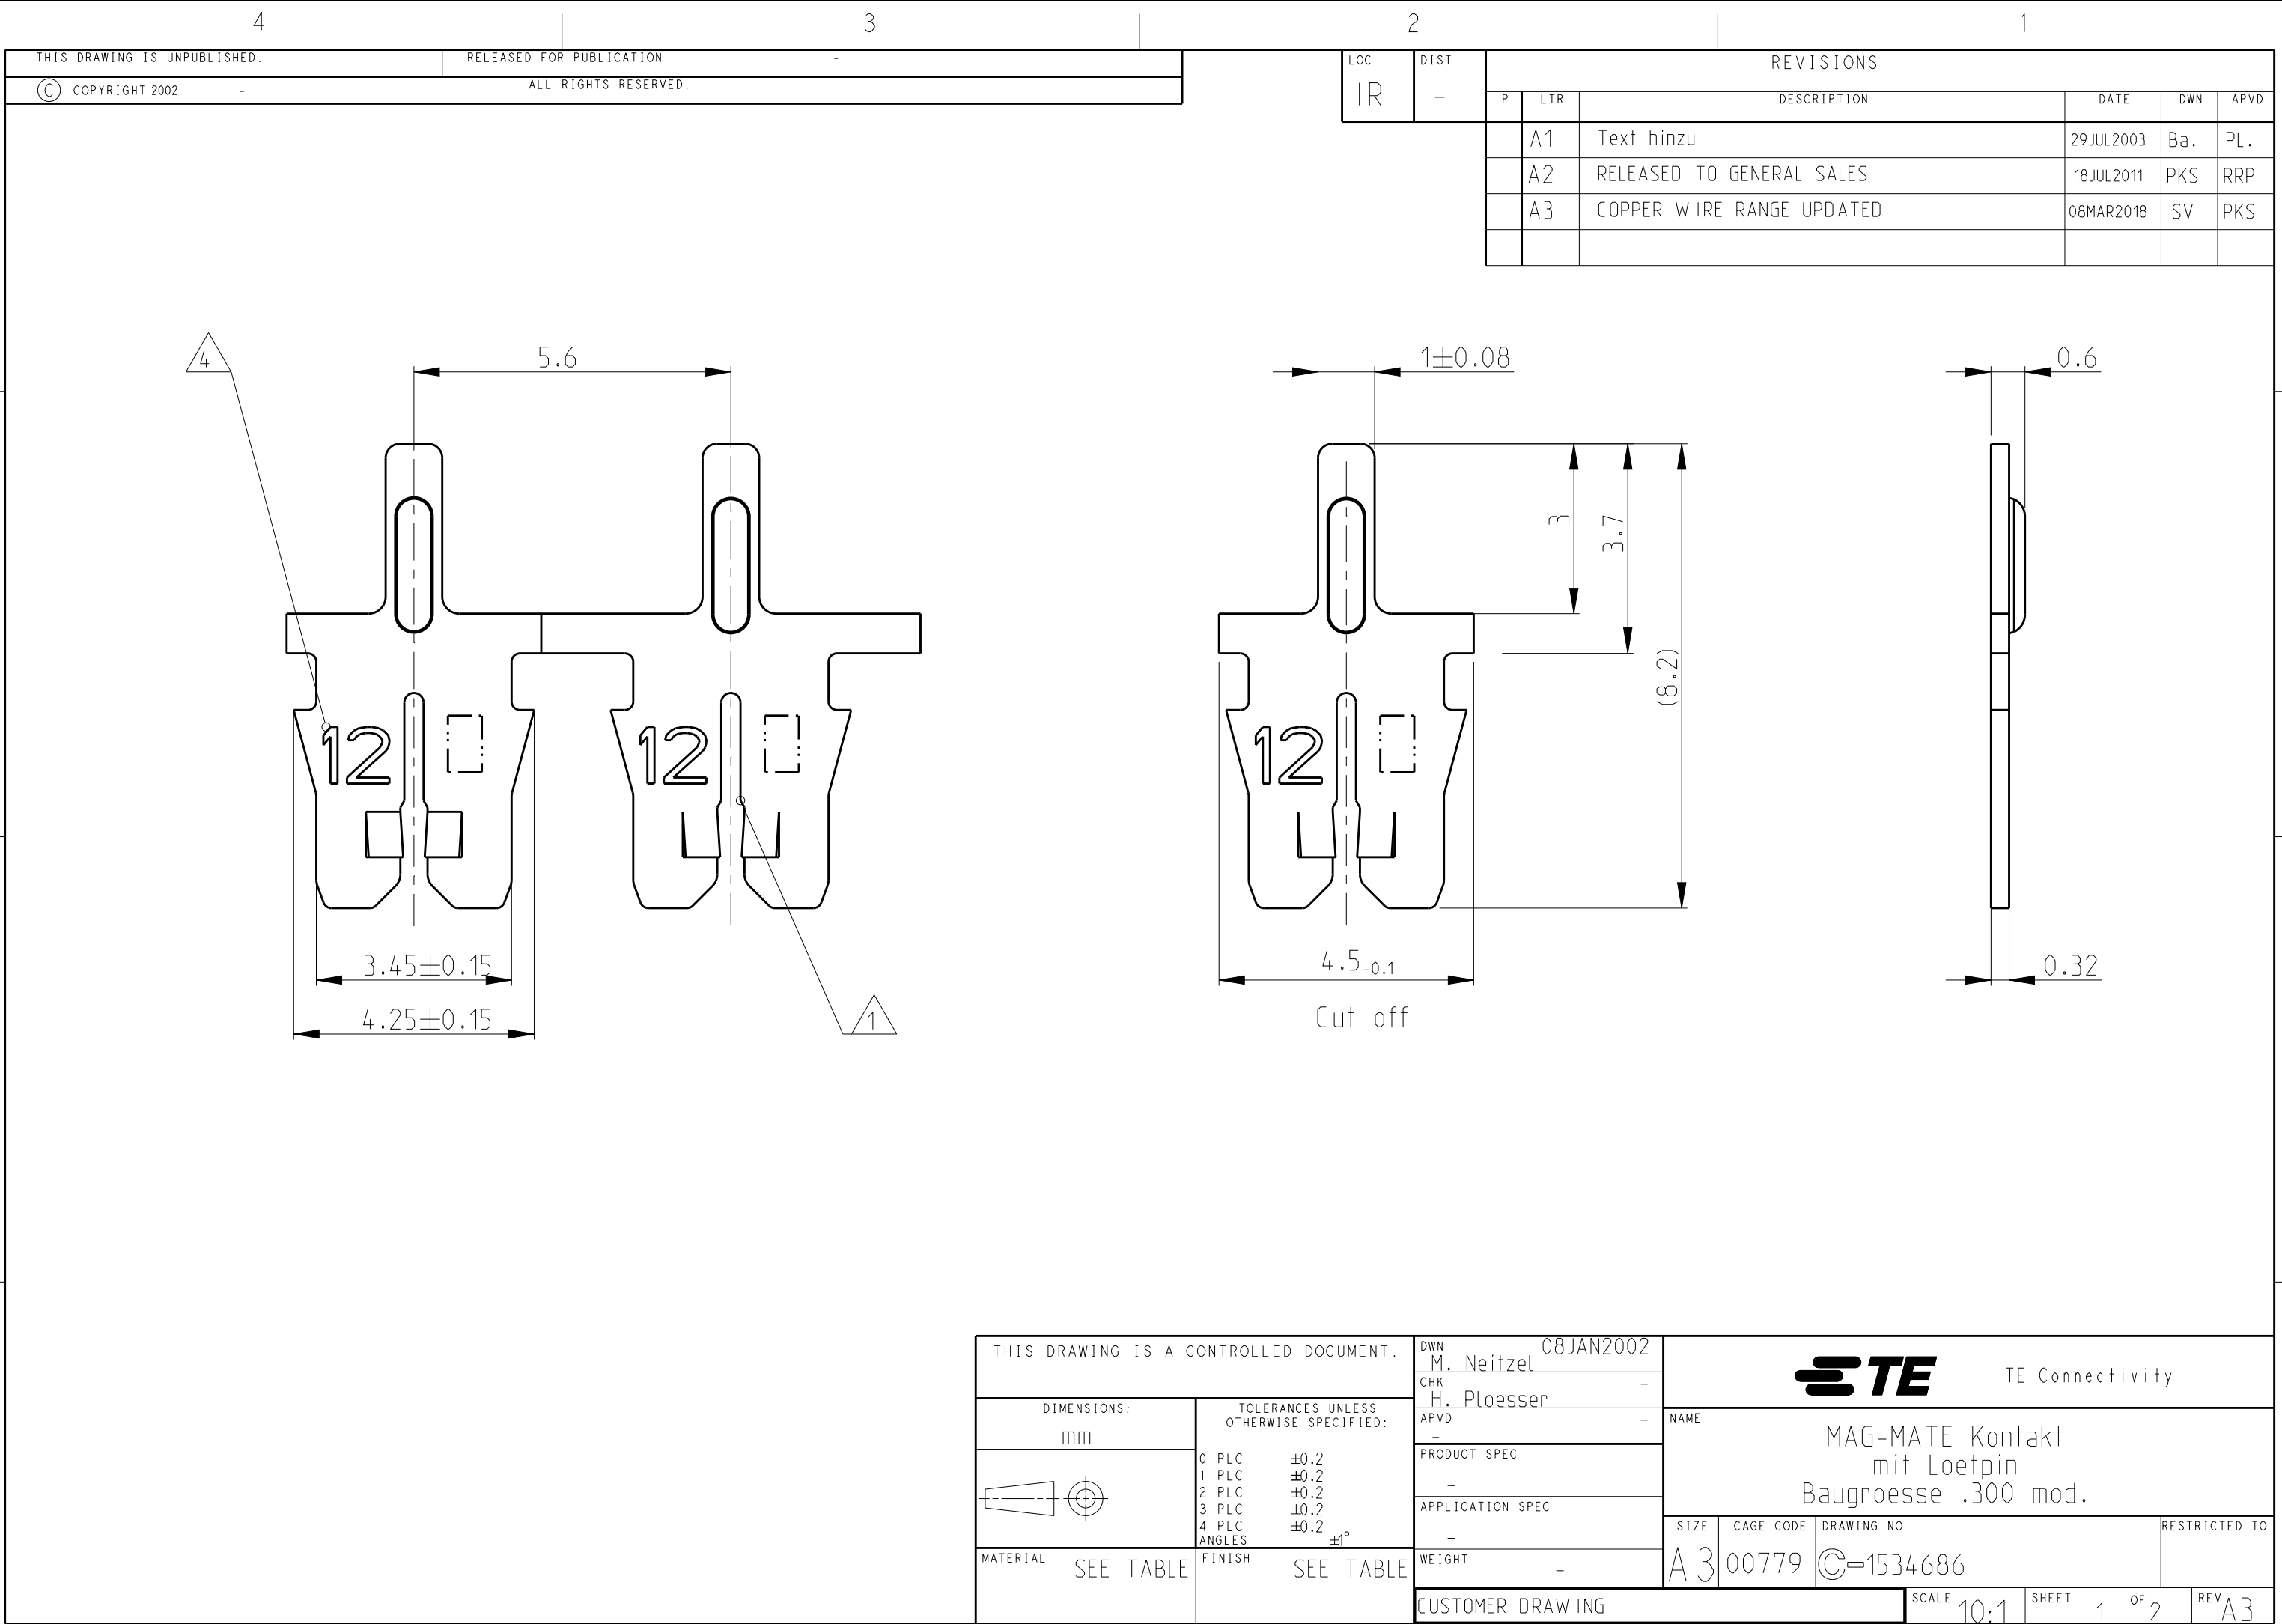

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
A1	-		-	SEE SHEET 1	-	-

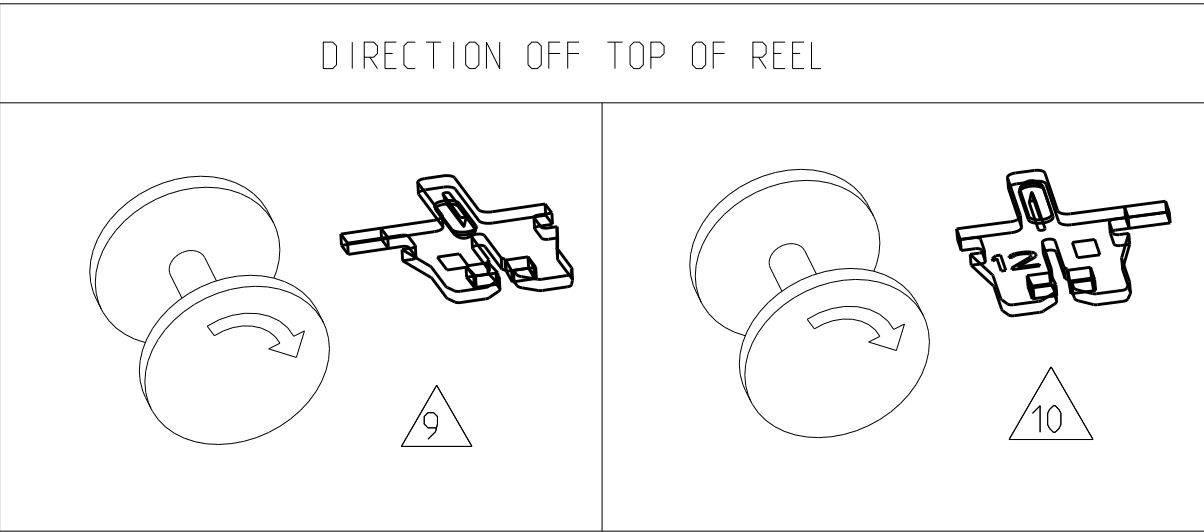

Bemerkungen:
NOTES:

- 1

Geeignet fuer Kupferlackdraht
Einzel- Ø0.45...0.63mm oder Doppeldraht Ø0.45...0.56mm
SLOT ACCEPTS:
COPPER SINGLE MAGNET WIRE Ø0.45...0.63mm DIA
OR COPPER DOUBLE MAGNET WIRE Ø0.45...0.56mm DIA
- 2


Anlieferungszustand: Kontakte fortlaufend mit
Papierzwischenlage auf Kunststoffspule aufgewickelt
Max. 5 Splice Stellen pro Spule
Splice Stellen nicht miteinander verbunden
DELIVERYSTATE: CONTACTS CONTINUOUS REELED WITH
PAPER INTERLAYER ON PLASTIC-REEL.
MAX. 5 SPLICES PER REEL
SPLICES BE NOT BONDED TOGETHER.
- 3

Kontaktkammer nach Zeichnung
CAVITY ACCORDING DWG. } 411-18516
- 4

Kennziffer fuer Drahtgroessenbereich (12)
IDENTIFICATION NO. FOR MAGNET WIRE RANGE (12)
- 5

Materialdicke
STOCK THICKNESS } 0,32±0,02

	10	A	CuNiSi	Ag OVER Ni	1-1534686-8
	10	A	CuNiSi	Au OVER Ni	1-1534686-7
	10	A	CuNiSi	BLANK	1-1534686-2
	10	A	CuSn	PRETINNED	1-1534686-1
OBSOLETE	9	B	CuNiSi	Ag OVER Ni	1534686-8
	9	B	CuNiSi	Au OVER Ni	1534686-7
	9	B	CuNiSi	BLANK	1534686-2
	9	B	CuSn	PRETINNED	1534686-1
	REELING	REV.	5 MATERIAL	SURFACE COLOR	TE PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. Neitzel	08JAN2002	 TE Connectivity	
DIMENSIONS: mm		CHK H. Ploesser	-		
		APVD -	-	NAME MAG-MATE Kontakt mit Loetpin Baugroesse .300 mod.	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -	-		
0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ±0.2 ANGLES ±1°		APPLICATION SPEC -	-	SIZE A3	CAGE CODE 00779
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT -	DRAWING NO C-1534686	RESTRICTED TO
CUSTOMER DRAWING				SCALE 10:1	SHEET 2 OF 2
				REV A3	