


© – TE Connectivity, All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AF2	ECR-25-261097	04NOV2025	SA	PS

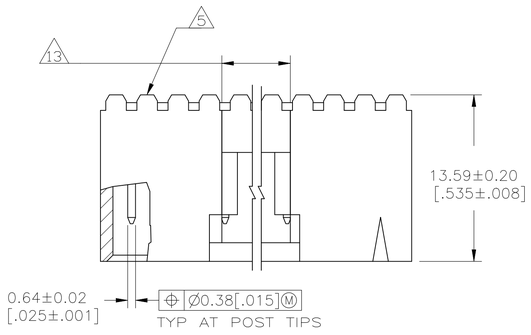

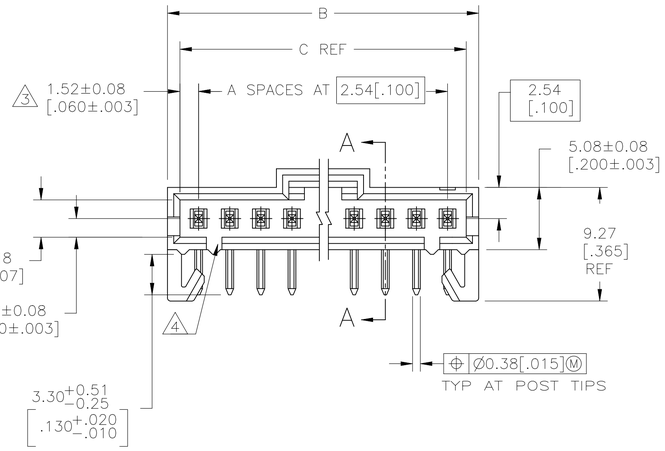

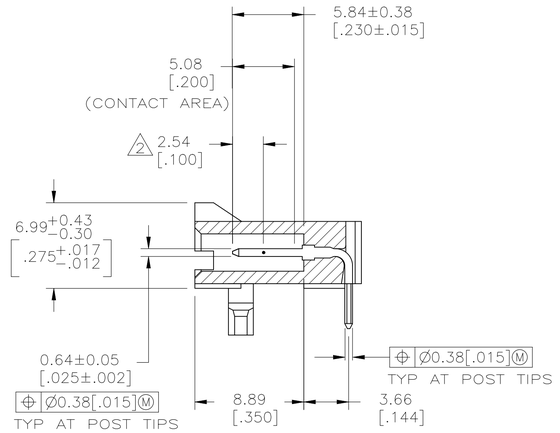

SECTION A–A

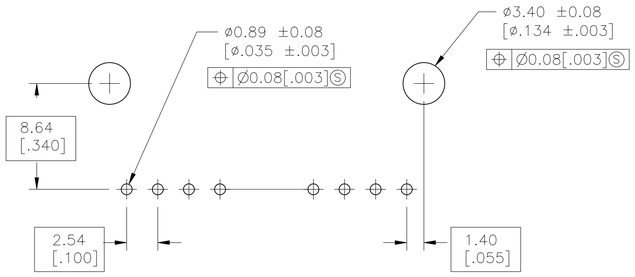

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 09FEB01	TE Connectivity
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – 1 PLC ± – 2 PLC ± 0.13[.005] 3 PLC ± – 4 PLC ± – ANGLES ± –	CHK K WRIGHT 09FEB01	NAME HDR ASSY, RTANG, SR 2.54[.100] CL, 0.64[.025] SQ POST,
		APVD K WRIGHT 09FEB01	
		PRODUCT SPEC 108-25034	
		APPLICATION SPEC 114-25026	SIZE A1 / CAGE CODE 00779 / DRAWING NO C-103672 / RESTRICTED TO –
MATERIAL 7	FINISH SEE TABLE	WEIGHT	
		CUSTOMER DRAWING	SCALE 4:1 / SHEET 1 OF 2 / REV AF2

© – TE Connectivity, All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

1. .000100 BRIGHT TIN–LEAD OVER .000050 NICKEL.
2. POINT OF MEASUREMENT FOR PLATING THICKNESS.
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
4. ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS.
 ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
5. AMP TRADEMARK MOLDED ON THIS SURFACE.
6. FOR USE WITH 1.57±0.20[.062±.008] PRINTED CIRCUIT BOARD.
7. MATERIAL: HOUSING– FLAME RETARDANT LCP, COLOR–BLACK.
 POSTS– BRASS.
8. .000100 BRIGHT TIN OVER .000050 NICKEL.
9. PRELIMINARY PART – NOT RELEASED FOR PRODUCTION.
10. .000100 MATTE TIN OVER .000050 NICKEL.
11. HIGH TEMPERATURE CONFIGURATION
12. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
13. 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF

REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.
OBSOLETE		64.01 [2.520]	65.91 [2.595]	24	25	12 7-103672-4
		61.47 [2.420]	63.37 [2.495]	23	24	12 7-103672-3
		58.93 [2.320]	60.83 [2.395]	22	23	12 7-103672-2
		56.39 [2.220]	58.29 [2.295]	21	22	12 7-103672-1
		53.85 [2.120]	55.75 [2.195]	20	21	12 7-103672-0
		51.31 [2.020]	53.21 [2.095]	19	20	6-103672-9
		48.77 [1.920]	50.67 [1.995]	18	19	12 6-103672-8
		46.23 [1.820]	48.13 [1.895]	17	18	12 6-103672-7
		43.69 [1.720]	45.59 [1.795]	16	17	12 6-103672-6
		41.15 [1.620]	43.05 [1.695]	15	16	6-103672-5
		38.61 [1.520]	40.51 [1.595]	14	15	12 6-103672-4
		36.07 [1.420]	37.97 [1.495]	13	14	12 6-103672-3
11	10	33.53 [1.320]	35.43 [1.395]	12	13	12 6-103672-2
		30.99 [1.220]	32.89 [1.295]	11	12	6-103672-1
		28.45 [1.120]	30.35 [1.195]	10	11	12 6-103672-0
		25.91 [1.020]	27.81 [1.095]	9	10	5-103672-9
		23.37 [.920]	25.27 [0.995]	8	9	12 5-103672-8
		20.83 [.820]	22.73 [.895]	7	8	5-103672-7
		18.29 [.720]	20.19 [.795]	6	7	5-103672-6
		15.75 [.620]	17.65 [.695]	5	6	5-103672-5
		13.21 [.520]	15.11 [.595]	4	5	5-103672-4
		10.67 [.420]	12.57 [.495]	3	4	5-103672-3
		8.13 [.320]	10.03 [.395]	2	3	5-103672-2
		5.59 [.220]	7.49 [.295]	1	2	5-103672-1

REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.
OBSOLETE		25.91 [1.020]	27.81 [1.095]	9	10	3-103672-0
		15.75 [.620]	17.65 [.695]	5	6	2-103672-9
OBSOLETE		5.59 [.220]	7.493 [.295]	1	2	2-103672-8
OBSOLETE	11	13.21 [.520]	15.11 [.595]	4	5	2-103672-7
		10.67 [.420]	12.57 [.495]	3	4	2-103672-6
SUPERSEDED BY 5-103672-2		8.13 [.320]	10.03 [.395]	2	3	2-103672-5
		64.01 [2.520]	65.91 [2.595]	24	25	12 2-103672-4
		61.47 [2.420]	63.37 [2.495]	23	24	12 2-103672-3
		58.93 [2.320]	60.83 [2.395]	22	23	12 2-103672-2
		56.39 [2.220]	58.29 [2.295]	21	22	12 2-103672-1
		53.85 [2.120]	55.75 [2.195]	20	21	12 2-103672-0
		51.31 [2.020]	53.21 [2.095]	19	20	12 1-103672-9
		48.77 [1.920]	50.67 [1.995]	18	19	12 1-103672-8
		46.23 [1.820]	48.13 [1.895]	17	18	12 1-103672-7
		43.69 [1.720]	45.59 [1.795]	16	17	12 1-103672-6
SUPERSEDED BY 6-103672-5		41.15 [1.620]	43.05 [1.695]	15	16	1-103672-5
OBSOLETE		38.61 [1.520]	40.51 [1.595]	14	15	1-103672-4
		36.07 [1.420]	37.97 [1.495]	13	14	12 1-103672-3
		33.53 [1.320]	35.43 [1.395]	12	13	12 1-103672-2
SUPERSEDED BY 6-103672-1	11	30.99 [1.220]	32.89 [1.295]	11	12	1-103672-1
OBSOLETE		28.45 [1.120]	30.35 [1.195]	10	11	1-103672-0
		25.91 [1.020]	27.81 [1.095]	9	10	103672-9
		23.37 [.920]	25.27 [0.995]	8	9	103672-8
SUPERSEDED BY 5-103672-7		20.83 [.820]	22.73 [.895]	7	8	103672-7
SUPERSEDED BY 5-103672-6		18.29 [.720]	20.19 [.795]	6	7	103672-6
SUPERSEDED BY 2-103672-9		15.75 [.620]	17.65 [.695]	5	6	103672-5
		13.21 [.520]	15.11 [.595]	4	5	103672-4
		10.67 [.420]	12.57 [.495]	3	4	103672-3
OBSOLETE		8.13 [.320]	10.03 [.395]	2	3	103672-2
OBSOLETE		5.59 [.220]	7.49 [.295]	1	2	103672-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13[.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 7

FINISH SEE TABLE

DWN R BROWN 09FEB01
CHK K WRIGHT 09FEB01
APVD K WRIGHT 09FEB01
PRODUCT SPEC 108-25034
APPLICATION SPEC 114-25026
WEIGHT
CUSTOMER DRAWING

TE Connectivity

NAME HDR ASSY, RTANG, SINGLE ROW 2.54[.100] CL, 0.64[.025] SQ POST, WITH PLZN & HOLD DOWNS, AMPMODU MTE

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-103672 | RESTRICTED TO –

SCALE 4:1 | SHEET 2 OF 2 | REV AF2