

4

3




2

1

used for:

D-SUB

POS.	A -0.76	B $+0.25$	C	D -0.3	Part-N0.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	DSS1XPXXG04X
15	39.52	25.12	33.30 $+0.15$ -0.1	6.12	DSS2XPXXG04X
25	53.42	38.84	47.04 ± 0.13	5.99	DSS3XPXXG04X
37	69.70	55.30	63.50 ± 0.13	5.99	DSS4XPXXG04X

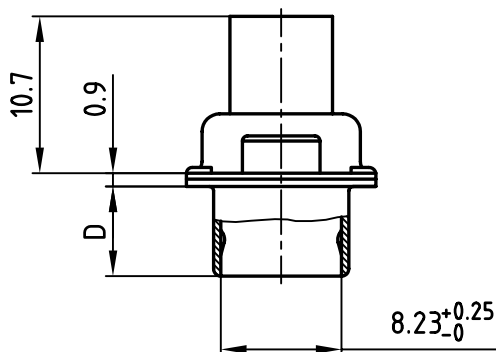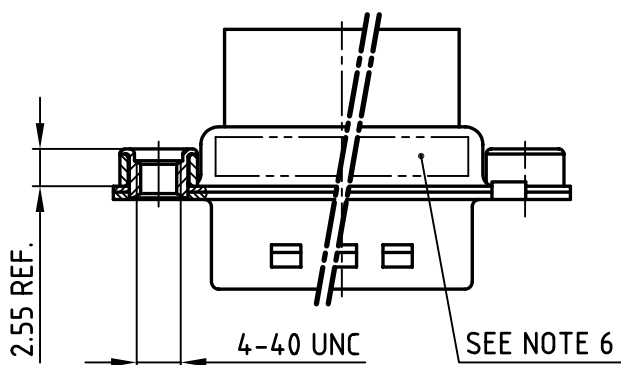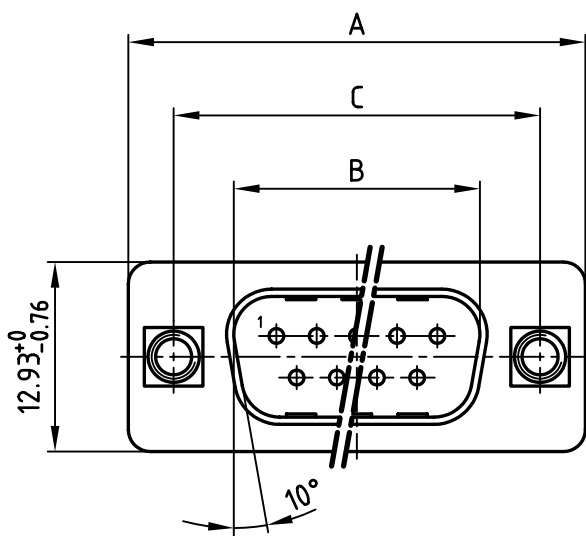

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
4. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
5. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LBS
6. CONNECTOR IS PART MARKED: PART-N0. CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance

2006	date	name
drawn	29.09.	Lehmenkühler
appd.	02.10.	Kühle
norm	DIN 41652	
d-old		

CONEC®



dim. in mm

scale:

2:1

material:

SEE NOTES

title:

D-SUB MALE
9-37pos. CRIMP STYLE
with threaded insert

dwg no:

AutoCAD 2006

DIN-A

16K1A1903

4

sh: 1/1

part no:

SEE TABLE

4

3

2

1