© – TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H4	REVISED PER ECR-25-255998	11SEP2025	SA	DSC

1 WIRE INSULATION DIA, SEE TABLE "A"

2 TONGUE MATL THK, 0.789±0.05 [.031±.002].

3 BODY: PHOS BRONZE PER ASTM B103
INSULATION: NYLON
SLEEVE: COPPER PER ASTM B152

4 BODY: TIN PLATE PER ASTM B545
SLEEVE: TIN PLATE PER ASTM B545
INSULATION: COLOR-BLUE

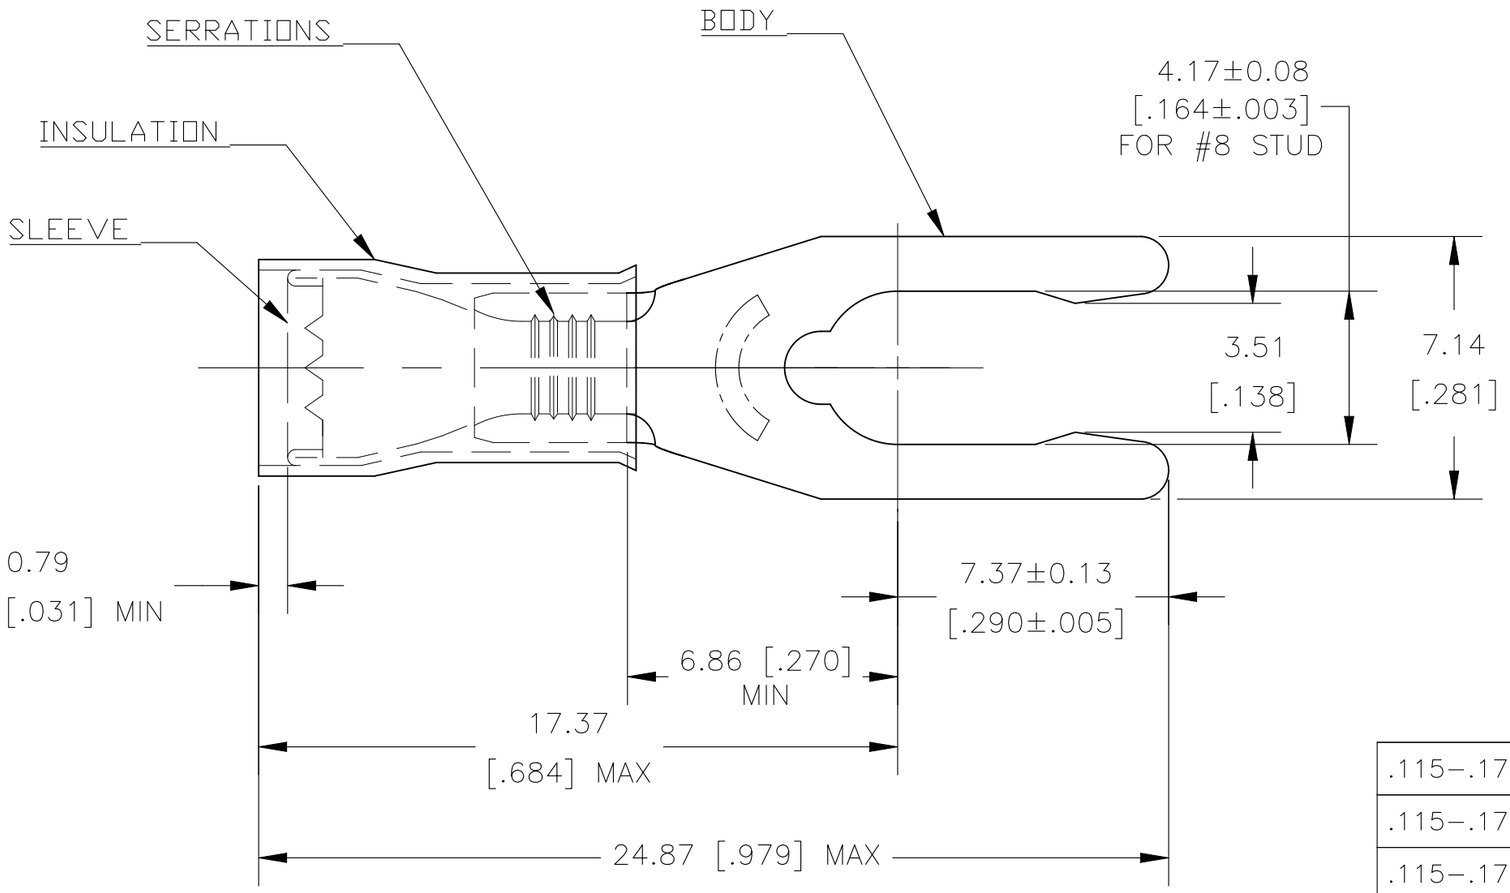

.115–.170	1 KIT = 250 PIECES	LOOSE PIECE	6-52421-0
.115–.170	5000	ON TAPE, REEL	52421-3
.115–.170	--	LOOSE PIECE	52421-1
.105–.150	--	LOOSE PIECE	52421
DIM "A"	QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.2 [.008]
3 PLC ± –
4 PLC ± –
ANGLES ± 5°

MATERIAL 3

FINISH 4

DWN jr ruth 14MAY10
CHK TOM MICHIELUTTI 14MAY10
APVD TOM MICHIELUTTI 14MAY10
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME
TERMINAL, PIDG, SPRING SPADE,
WIRE SIZE: 16-14 AWG
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-52421	–

CUSTOMER DRAWING | SCALE 6:1 | SHEET 1 OF 1 | REV H4