
CUSTOMER DRAWING

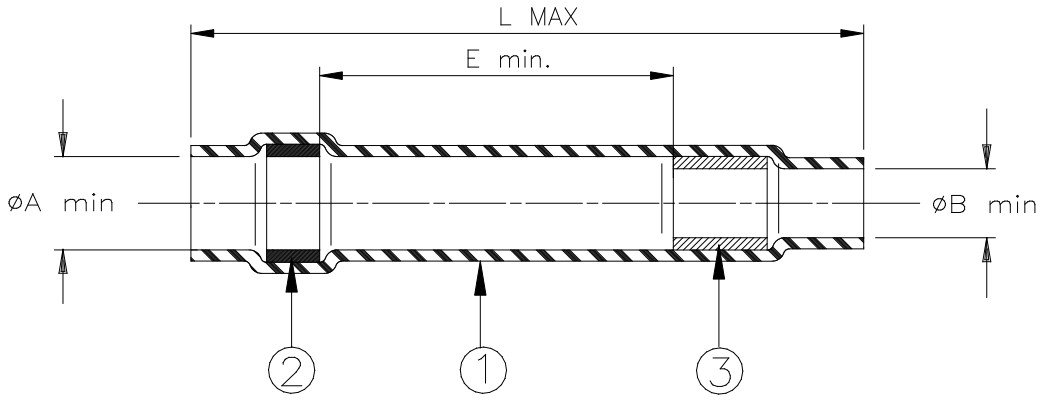

Product Name	Product Dimensions				Cable Dimensions	
	L max	E min	Ø A min	Ø B min	Ø D min	Ø D max
D-108-06	127 (5.0)	73 (2.875)	8.9 (0.350)	7.5 (0.295)	4.5 (0.175)	7.5 (0.295)
D-108-07	127 (5.0)	74 (2.915)	10.2 (0.400)	8.8 (0.345)	5 (0.200)	8.8 (0.345)
D-108-08	131 (5.150)	74 (2.915)	12.7 (0.500)	11.3 (0.445)	7 (0.275)	11.3 (0.445)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride
2. SOLDER PREFORM WITH FLUX:
   SOLDER: TYPE Sn96 per ANSI-J-STD-006.
   FLUX: TYPE ROM1 per ANSI-J-STD-004.
3. MELTABLE INSERT: Meltable thermoplastic. Color: clear.

APPLICATION

1. These parts are designed to attach an overshield to butt spliced shielded cables.
2. Temperature range: -55°C to +150°C.

Cable dimensions: see table.



TE	*Raychem* THERMOFIT DEVICES		TITLE: SOLDERSLEEVE* DEVICE			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: D-108-06/-08			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV : 2	DATE : 16-Apr-2020		
DRAWN BY: M. FORONDA	DATE: 29-JUN-98	ECO: ECO-20-005255	SCALE: NTS	SIZE: A	SHEET: 1 of 1	

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.
If this document is printed it becomes uncontrolled. Check for the latest revision.
*TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks