
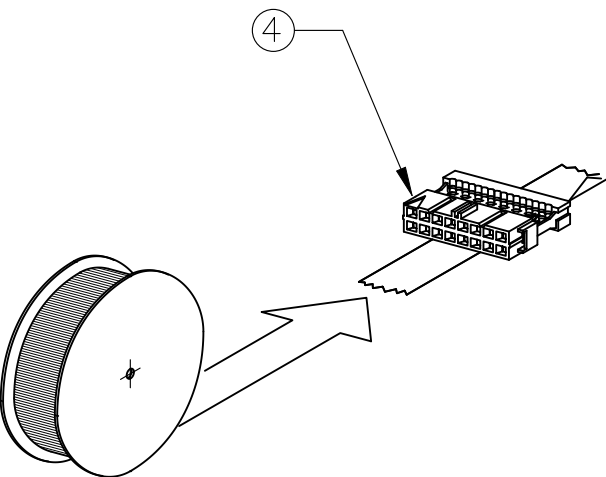
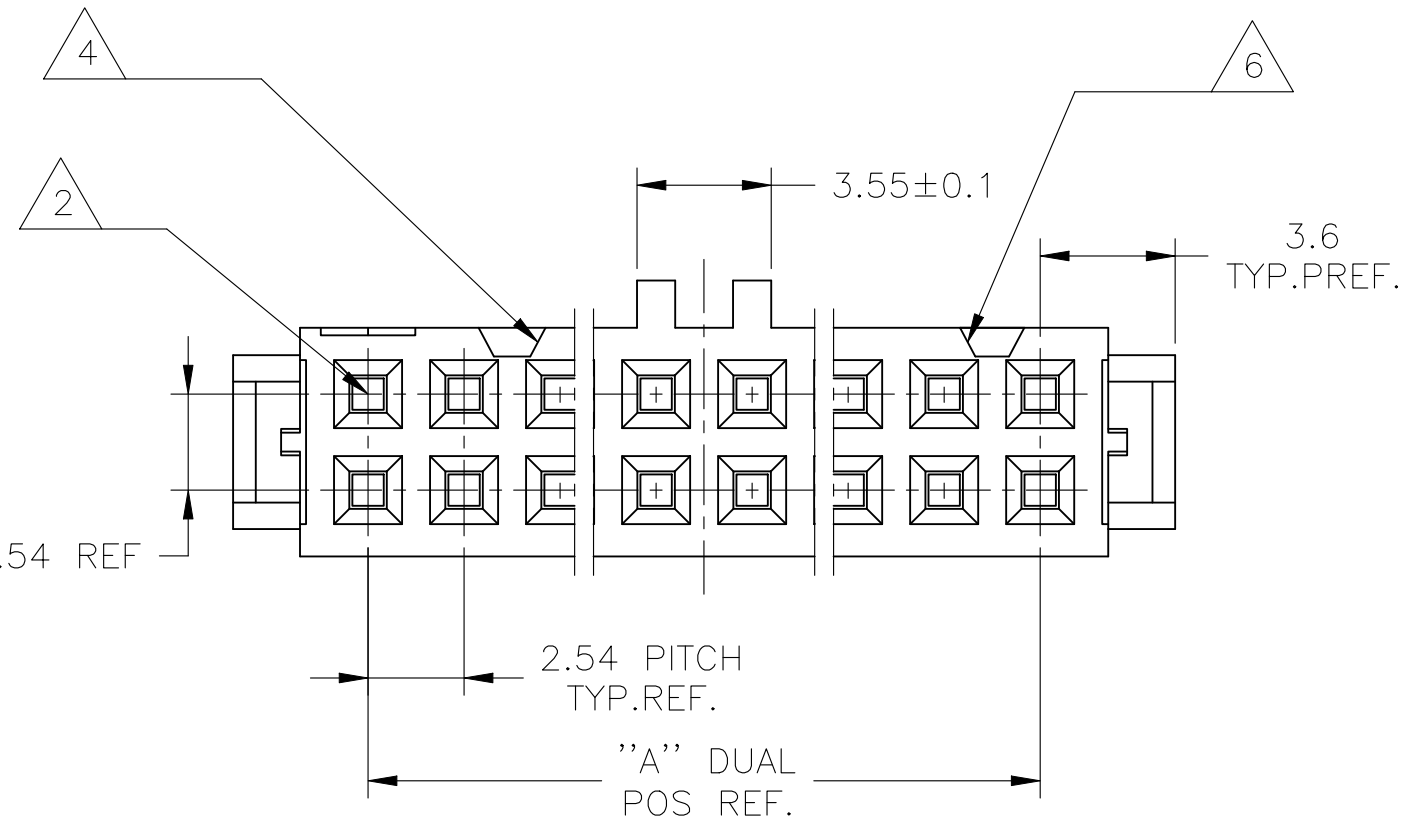
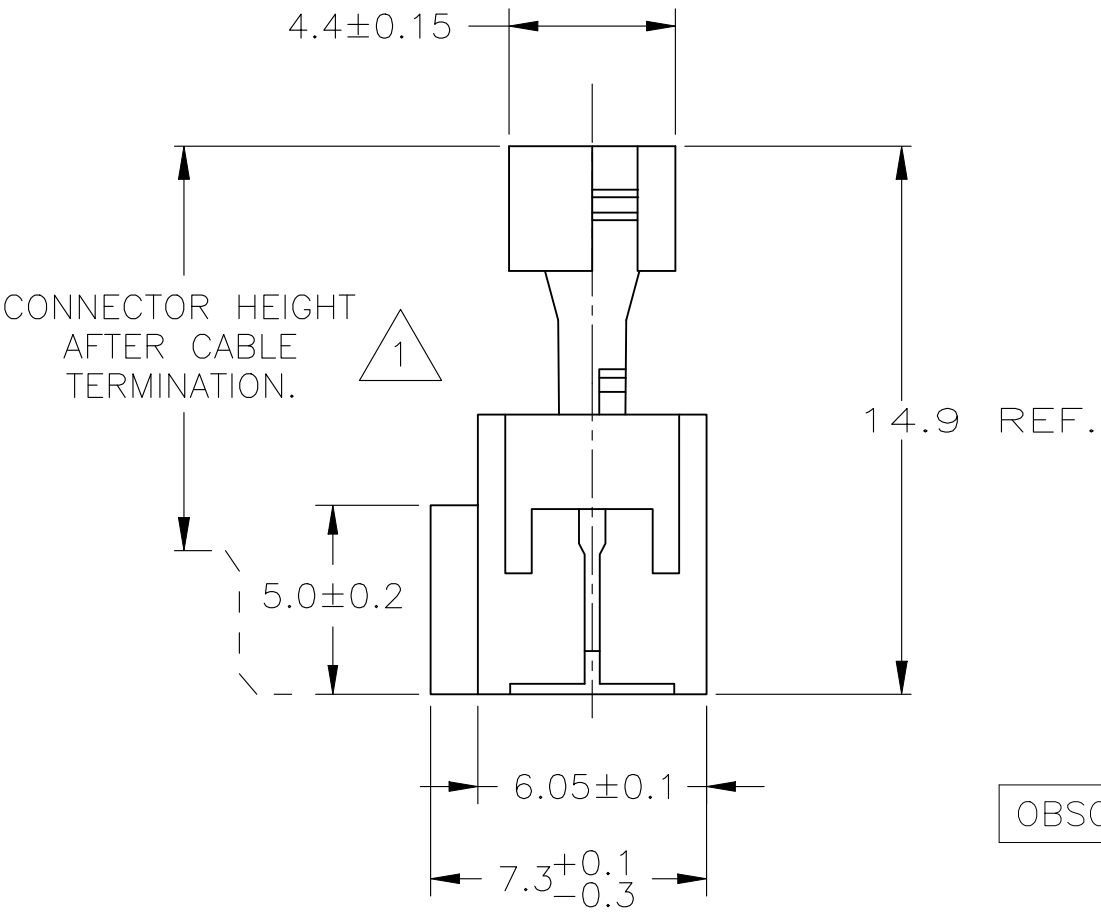
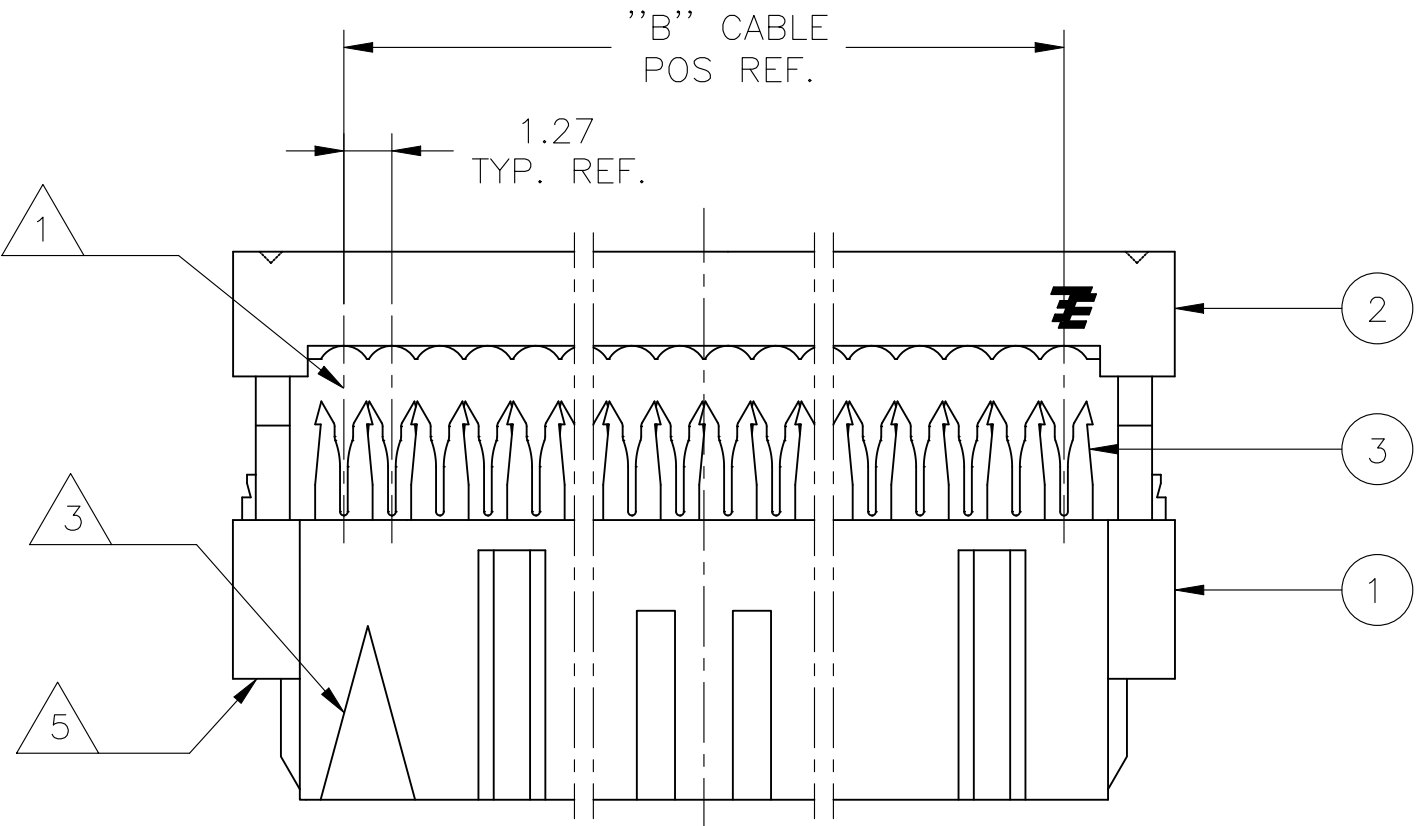


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F2	REVISED AS PER	10SEP2024	MK	GC

- 1
- CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1.27 CENTERS.
FOR CABLE REQUIREMENTS SEE TE APPLICATION SPECIFICATION 114–19022.
- 2
- THESE RECEPTACLE CONNECTORS MATE WITH 0.64±0.05mm SQUARE OR ROUND POSTS ON 2.54mm GRID.
- 3
- MARK INDICATING FIRST CABLE POSITION REFERRING TO CONTACT POSITION.
- 4
- THERE IS NO POLARIZATION–SLOT AT THIS END IN 6, 10 AND 14 POS CONNECTORS.
- 5
- THESE CONNECTORS CAN BE USED IN CONJUNCTION WITH STRAIN–RELIEF COVERS OF PARTNR: 100103.
- 6
- THERE IS NO POLARIZATION–SLOT AT THIS END IN 6 POS CONNECTORS.
- 7
- PRODUCT SPECIFICATION 108–19033.

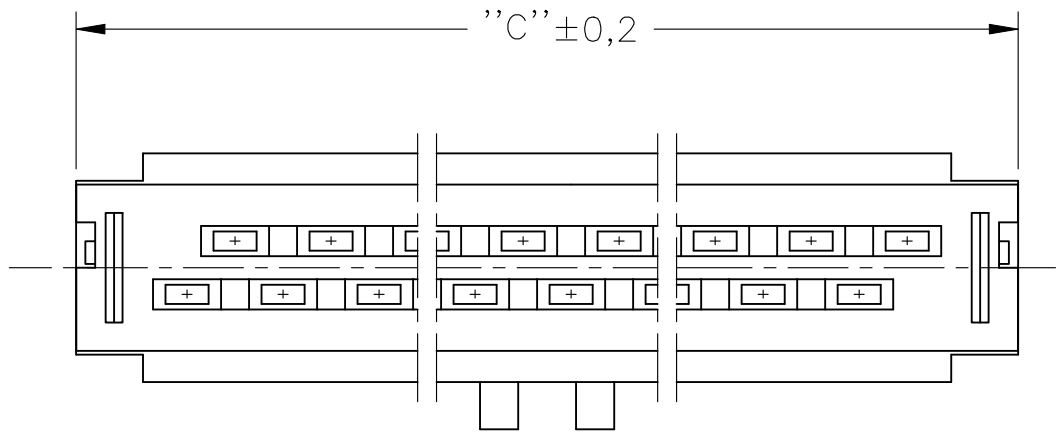

③ RECEPTACLE CONTACT	PHOSPHORBRONZE Cu Sn6	AT CONTACT–PLACE: 0.75μ GOLD/PDNI AT WIRING END: 2,5μ TIN ENTIRE UNDERCOATING:1,27μ NICKEL
② COVER	THERMOPLASTIC POLYESTER GF UL 94 –V0	BLACK BK015 ONLY FOR REF.
① HOUSING		
COMPONENT NAME	MATERIAL	PLATING / COLOUR

OBSOLETE	500	85,9	64	32	6–215915–4	D
	500	80,8	60	30	6–215915–0	D
	500	68,1	50	25	5–215915–0	D
	1500	60,5	44	22	4–215915–4	D
OBSOLETE	750	55,4	40	20	4–215915–0	D
	1500	47,8	34	17	3–215915–4	D
	1500	42,7	30	15	3–215915–0	D
	1500	37,6	26	13	2–215915–6	D
OBSOLETE	1500	30,0	20	10	2–215915–0	D
	1500	24,9	16	8	1–215915–6	D
	1500	22,4	14	7	1–215915–4	D
	1500	17,3	10	5	1–215915–0	D
OBSOLETE	1500	14,8	8	4	0–215915–8	B
	1500	12,2	6	3	0–215915–6	D
OBSOLETE	1500	9,7	4	2	0–215915–4	B
QUANTITY PER REEL		DIM."C"	"B" CABLE POS.	"A" DUAL POS.	PARTNUMBER ④	PART REV.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.HOGEVEEN 02–02–88	TE Connectivity			
		CHK R.VERSTIJNEN 03–02–88				
		APVD L.V.SOEST 03–02–88	NAME			
		PRODUCT SPEC	AMP–LATCH MIL–TYPE RECEPT. CONN. ASS'Y 14,9 PRE–ASSEMBLED ④			
		APPLICATION SPEC				
		WEIGHT 0.000000	SIZE A2	CAGE CODE 00779	DRAWING NO C=215915	RESTRICTED TO –
		CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1	REV F2	