

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


| LOC | DIST |
|---|---|
| AD | 39 |


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | K | PLASTIC MATERIAL SUPPLIER CHANGED FOR HOUSING | 07MAY2021 | SB | KJK |

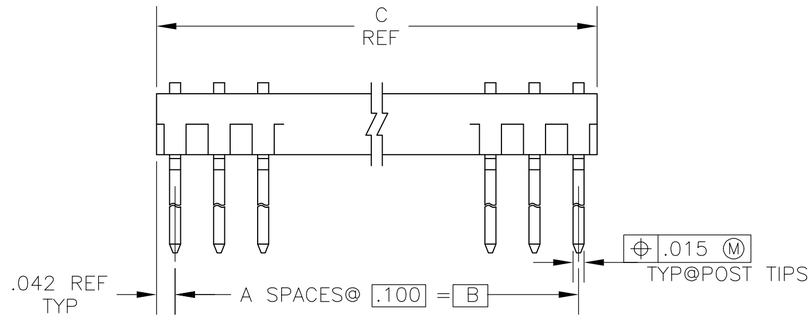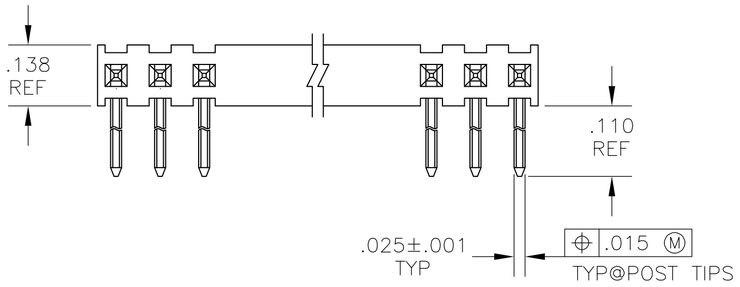


RECOMMENDED HOLE LAYOUT
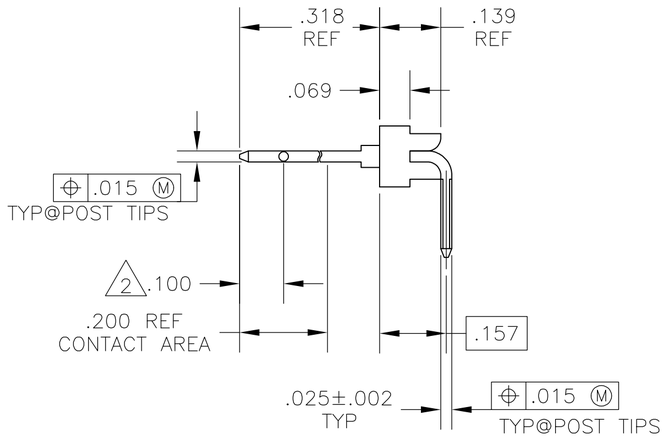
| C | B | A | NO OF POS | PART NO |
|---|---|---|---|---|
| 3.984 | 3.900 | 39 | 40 | 4–87233–0 |
| 3.884 | 3.800 | 38 | 39 | 3–87233–9 |
| 3.784 | 3.700 | 37 | 38 | 3–87233–8 |
| 3.684 | 3.600 | 36 | 37 | 3–87233–7 |
| 3.584 | 3.500 | 35 | 36 | 3–87233–6 |
| 3.484 | 3.400 | 34 | 35 | 3–87233–5 |
| 3.384 | 3.300 | 33 | 34 | 3–87233–4 |
| 3.284 | 3.200 | 32 | 33 | 3–87233–3 |
| 3.184 | 3.100 | 31 | 32 | 3–87233–2 |
| 3.084 | 3.000 | 30 | 31 | 3–87233–1 |
| 2.984 | 2.900 | 29 | 30 | 3–87233–0 |
| 2.884 | 2.800 | 28 | 29 | 2–87233–9 |
| 2.784 | 2.700 | 27 | 28 | 2–87233–8 |
| 2.684 | 2.600 | 26 | 27 | 2–87233–7 |
| 2.584 | 2.500 | 25 | 26 | 2–87233–6 |
| 2.484 | 2.400 | 24 | 25 | 2–87233–5 |
| 2.384 | 2.300 | 23 | 24 | 2–87233–4 |
| 2.284 | 2.200 | 22 | 23 | 2–87233–3 |
| 2.184 | 2.100 | 21 | 22 | 2–87233–2 |
| 2.084 | 2.000 | 20 | 21 | 2–87233–1 |
| 1.984 | 1.900 | 19 | 20 | 2–87233–0 |
| 1.884 | 1.800 | 18 | 19 | 1–87233–9 |
| 1.784 | 1.700 | 17 | 18 | 1–87233–8 |
| 1.684 | 1.600 | 16 | 17 | 1–87233–7 |
| 1.584 | 1.500 | 15 | 16 | 1–87233–6 |
| 1.484 | 1.400 | 14 | 15 | 1–87233–5 |
| 1.384 | 1.300 | 13 | 14 | 1–87233–4 |
| 1.284 | 1.200 | 12 | 13 | 1–87233–3 |
| 1.184 | 1.100 | 11 | 12 | 1–87233–2 |
| 1.084 | 1.000 | 10 | 11 | 1–87233–1 |
| .984 | .900 | 9 | 10 | 1–87233–0 |
| .884 | .800 | 8 | 9 | 87233–9 |
| .784 | .700 | 7 | 8 | 87233–8 |
| .684 | .600 | 6 | 7 | 87233–7 |
| .584 | .500 | 5 | 6 | 87233–6 |
| .484 | .400 | 4 | 5 | 87233–5 |
| .384 | .300 | 3 | 4 | 87233–4 |
| .284 | .200 | 2 | 3 | 87233–3 |
| .184 | .100 | 1 | 2 | 87233–2 |
| .084 | – | – | 1 | 87233–1 |

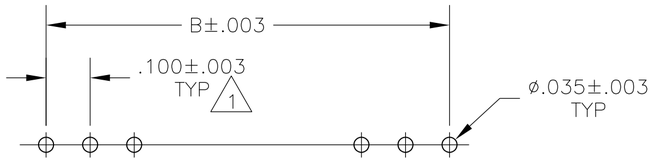87233

NOTES:

1. TOLERANCE NON–CUMULATIVE
2. POINT OF MEASUREMENT FOR PLATING THICKNESS
3. .000015 GOLD ON CONTACT AREA GOLD FLASH ON SOLDER AREA. ALL OVER .000050 NICKEL
4. HOUSING: FLAME RETARDANT THERMOPLASTIC
   COLOR: BLACK
   POST : PHOS. BRONZE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL 4 FINISH 3

DWN RAGHAVENDRA 24FEB09
CHK GESFORD JEFFREY 24FEB09
APVD GESFORD JEFFREY 24FEB09
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME HEADER ASSY, MOD II, .100C/L, SINGLE ROW, RIGHT ANGLE, .025 SQUARE POST

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C–87233 | – |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV K

1471–9 (3/11)