
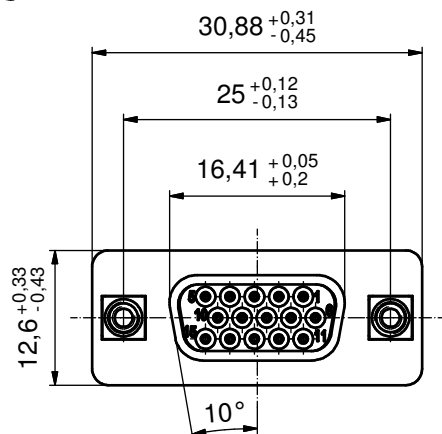
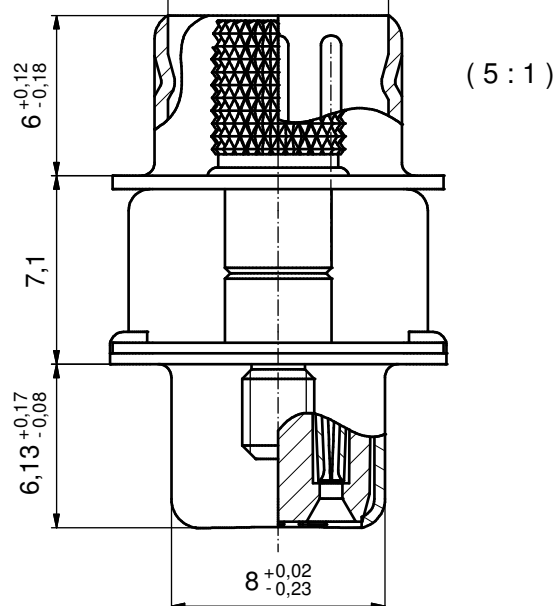
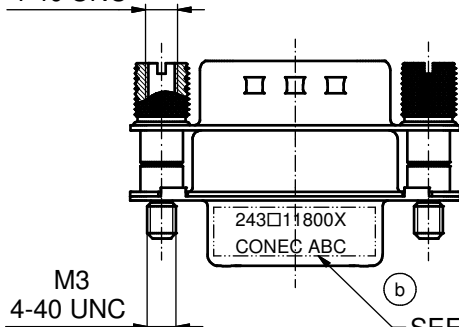


(b)


8,26 ^{+0,22} / -0,03M3
4-40 UNC

SEE NOTE 9

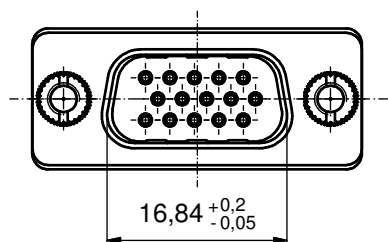

(b) NOTES:

- METAL SHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0; BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO):
☐ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
☐ PLEASE ADD B for 20µm HARD GOLD over min. 50µm NICKEL
☐ PLEASE ADD C for 30µm HARD GOLD over min. 50µm NICKEL
- THREADED INSERTS: COPPER ALLOY; min 200µm TIN over 80µm NICKEL
- JACK SCREWS: COPPER ALLOY; NICKEL PLATED
- CAPACITANCE: 830pF ±20%
- DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
- MAXIMUM TORQUE VALUE FOR THREAD : 6 in.LB
- CONNECTOR IS PART MARKED: 243□11800X CONEC ABC (see note 4)



Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm	
					date	name	
				drawn	17.07.2014	Bludau	
				appd.	17.07.2014	Henneboel	
				norm			
				d-old	24K1IP7A		
5 x b	Ä5283	17.07.2014	Blu				
a	Original						
rev.	description	date	name				

CONEC®