


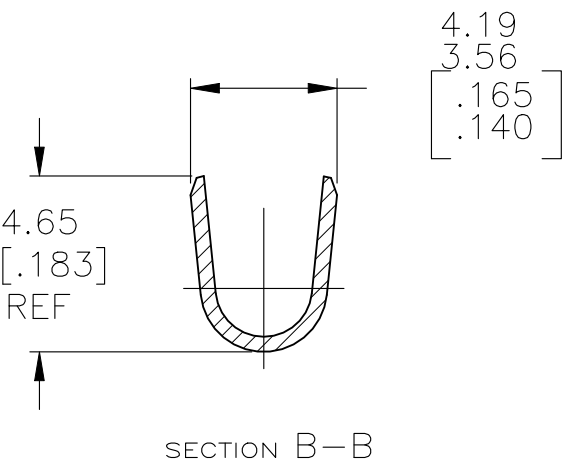
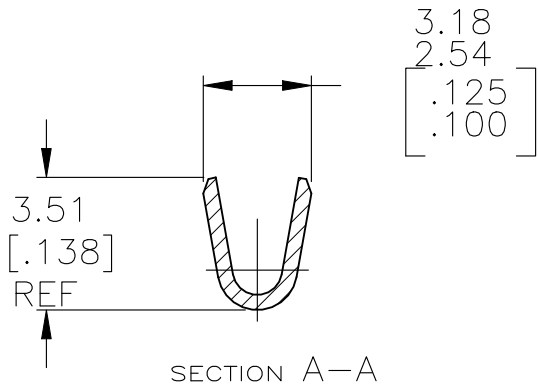


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	U2	REVISED PER ECR-23-163558	17MAR2023	SS	RE

- 1
- CONTINUOUS STRIP ON REELS.
- 2
- WIRE RANGE: 20-16 AWG
- 3
- INSULATION RANGE: 2.29-3.05 [.090-.120] DIA.

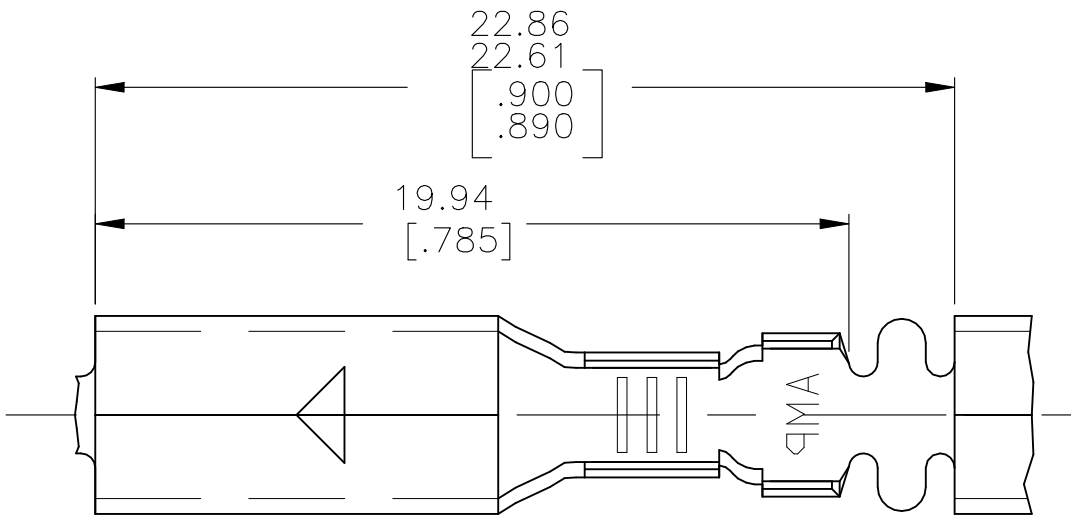

FITS $\phi 4.57$
[.180] PIN

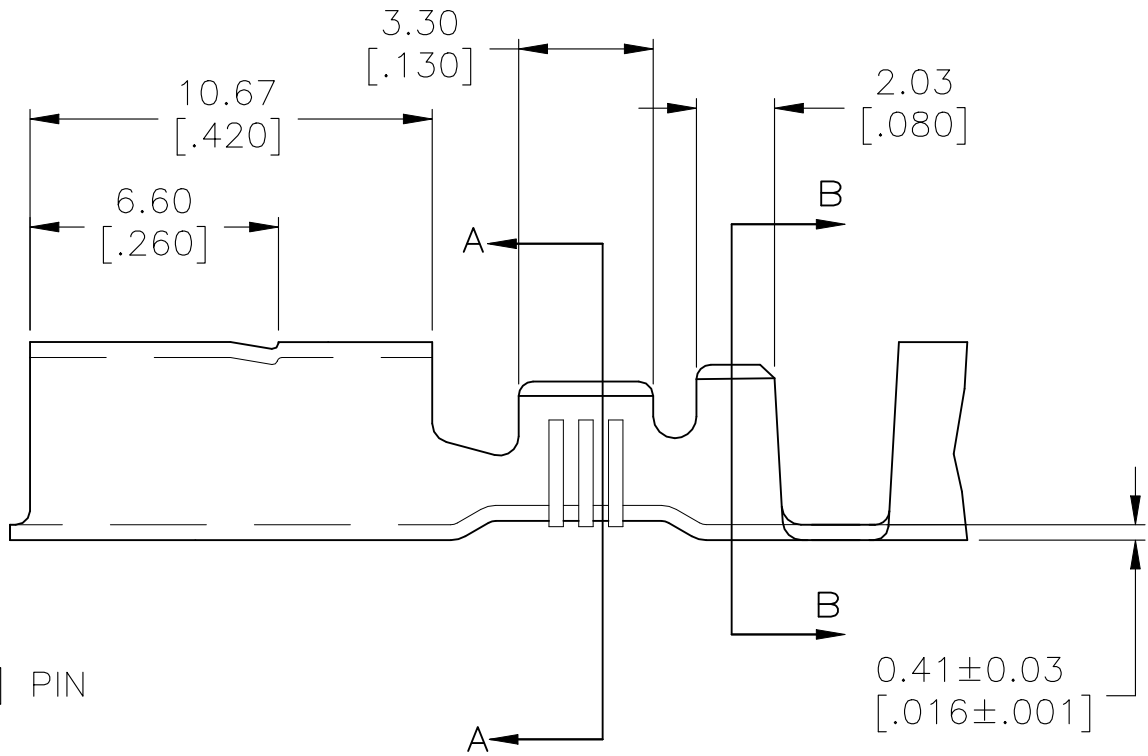

OBSOLETE	NONE	HO4 PHOS. BRONZE	42531-5
OBSOLETE	NONE	HO4 CU BRONZE	42531-4
	NONE	HO4 PHOS. BRONZE	42531-3
	TIN	4M BRASS	42531-2
OBSOLETE	NONE	4M BRASS	42531-1
	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA 300CT2007	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK D DECKER 300CT2007			
		APVD D DECKER 300CT2007			
		PRODUCT SPEC			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	NAME RECEPTACLE SHUR PLUG, 4.57 [.180] DIA		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.38 [.015] 3 PLC ± - 4 PLC ± - ANGLES ± 1°		—	SIZE A3	CAGE CODE 00779	DRAWING NO C-42531
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT 0.000000	RESTRICTED TO —	REV U2
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1	