


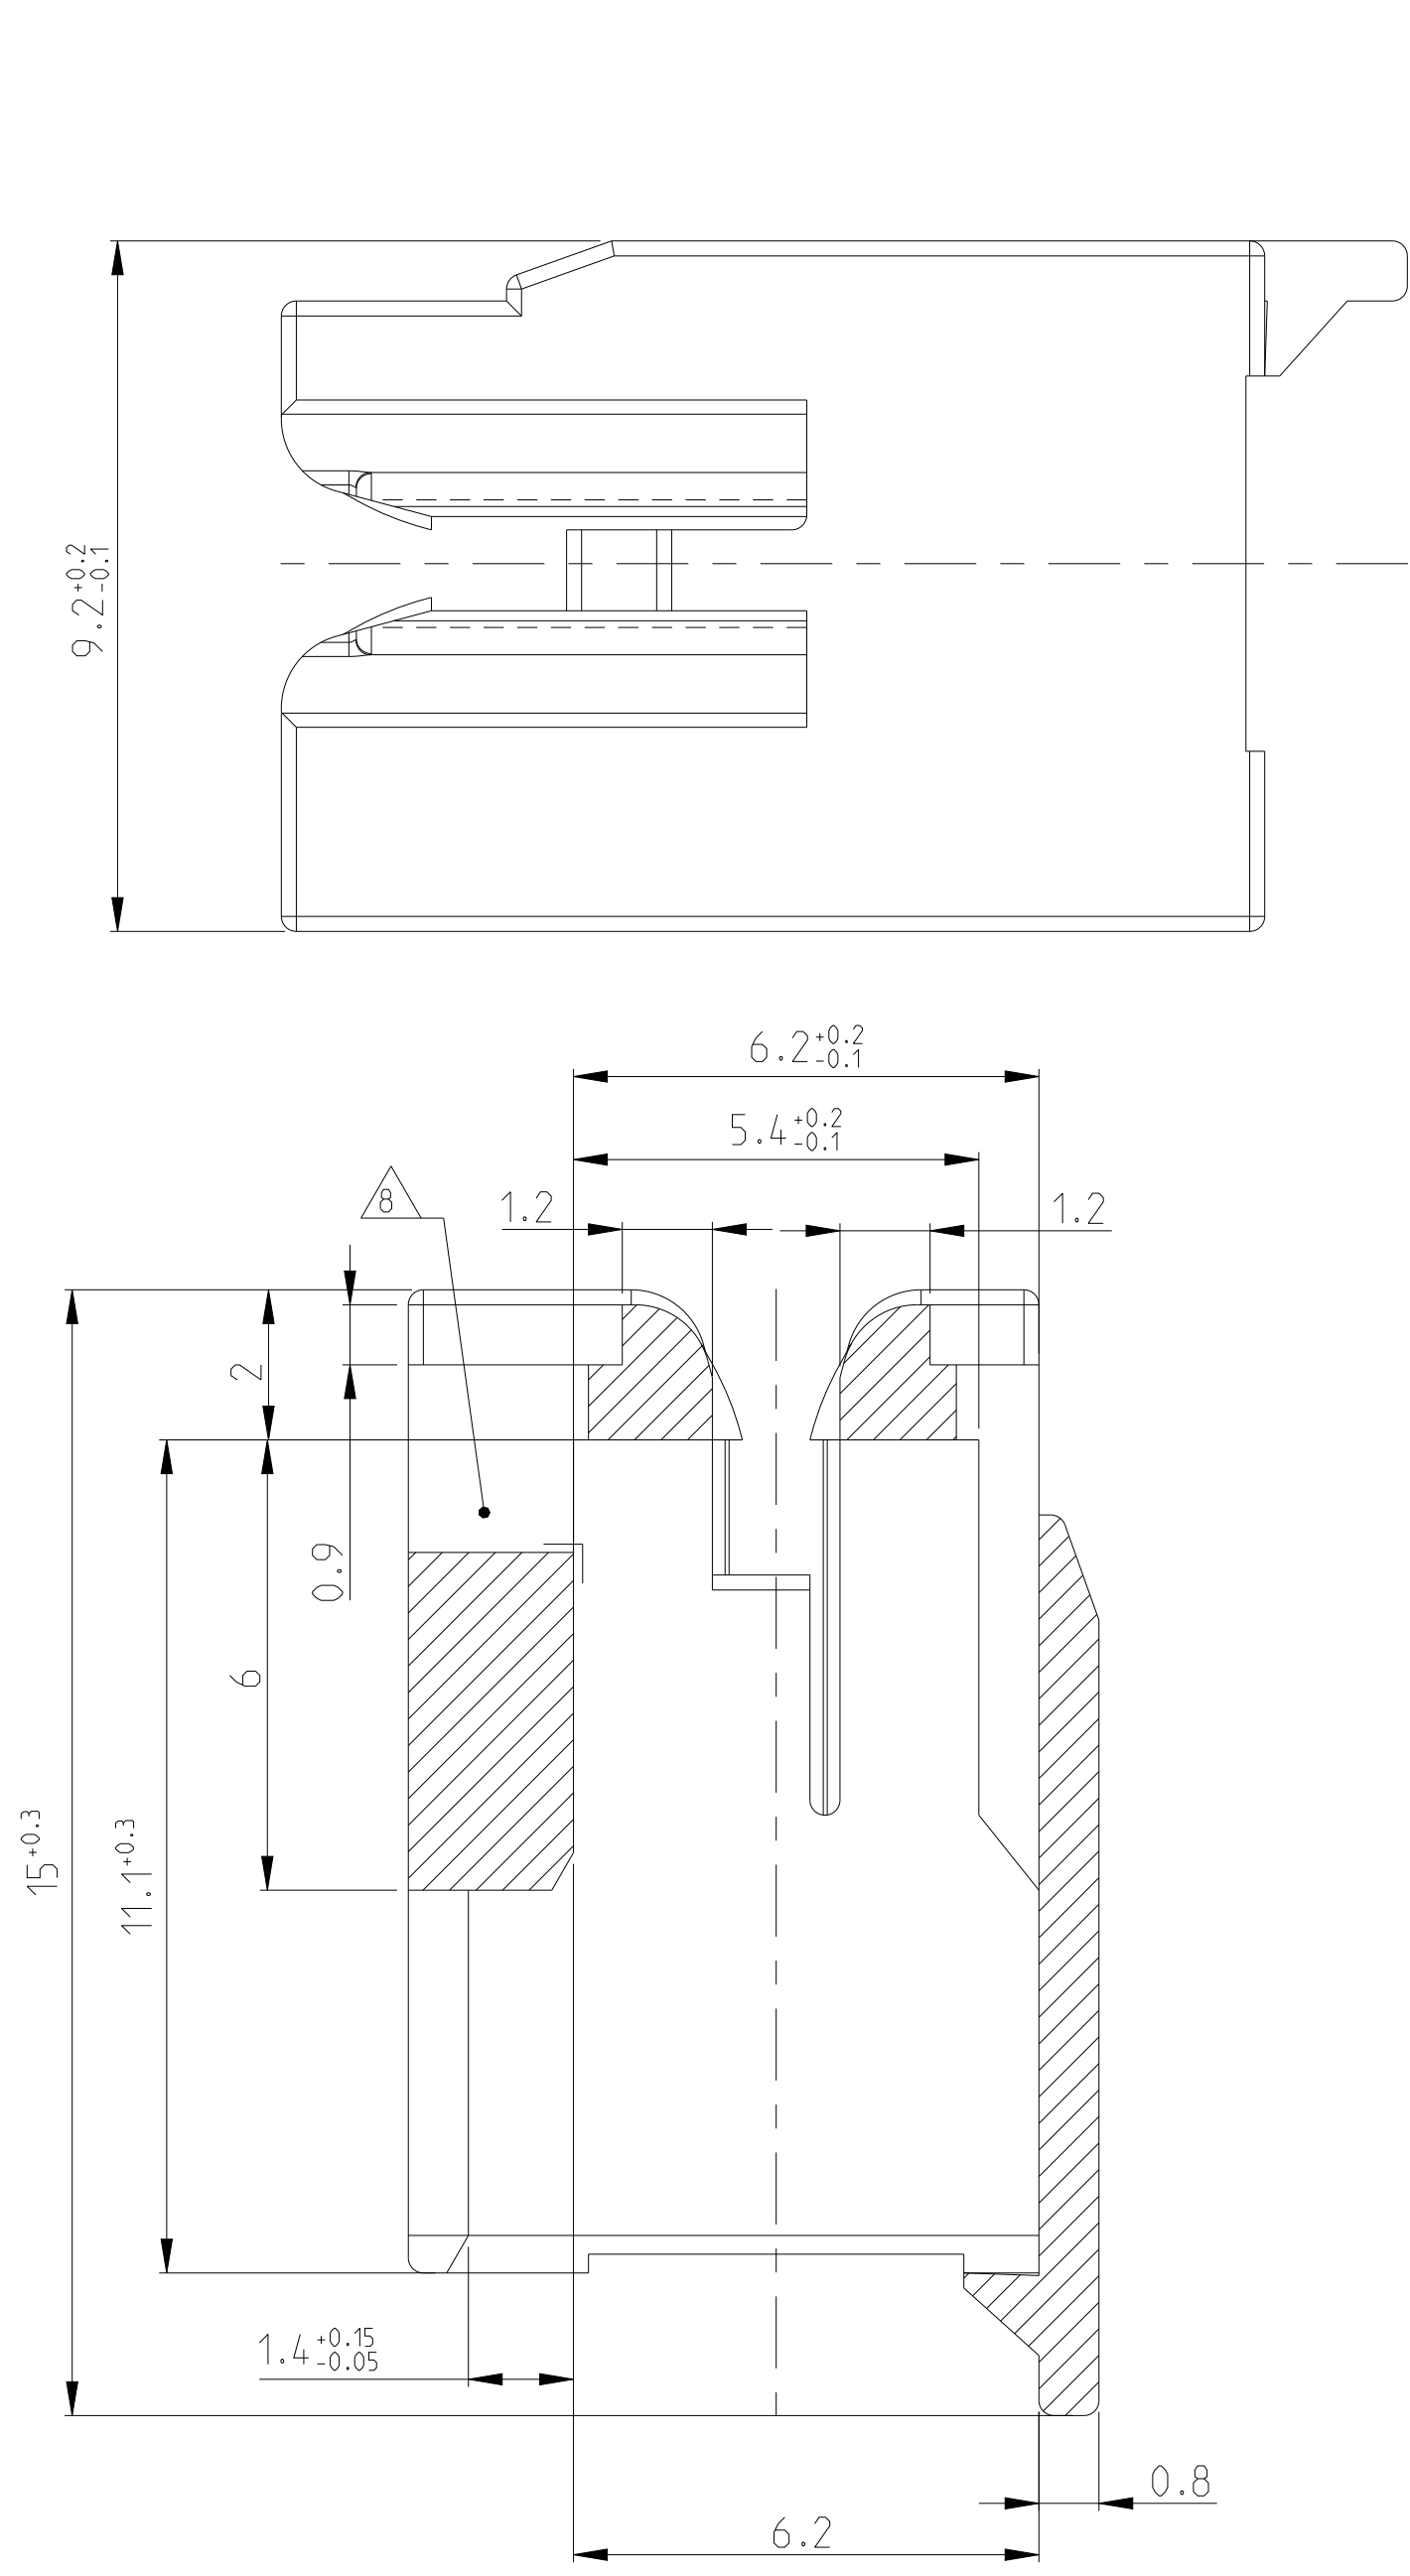

10 Passende Gegenstecker siehe PN 829 868/966 194
MATING PARTS SEE PN 829 868/966 194

 WITH STROKE LINE DRAWN VERSIONS NOT YET AVAILABLE

 SIEHE BLATT 2 VON 2
SEE SHEET 2 OF 2

△ Außennuten eingeeengt.
Varianten siehe Blatt 2)
GROOVES ON OUTSIDE NARROWED. VERSIONS SEE SHEET 2


17 GLOW WIRE TEST 750°C ACC.DIN EN 60695-2-11
WITHOUT FLAME

 OBSOLETE

19 PRELIMINARY PART, NOT FOR PRODUCTION



 HOOK DIMENSION, NOT THE DIMENSION FOR MIDDLE WALL

△21 PARTS WITH LOW INSERTION FORCE

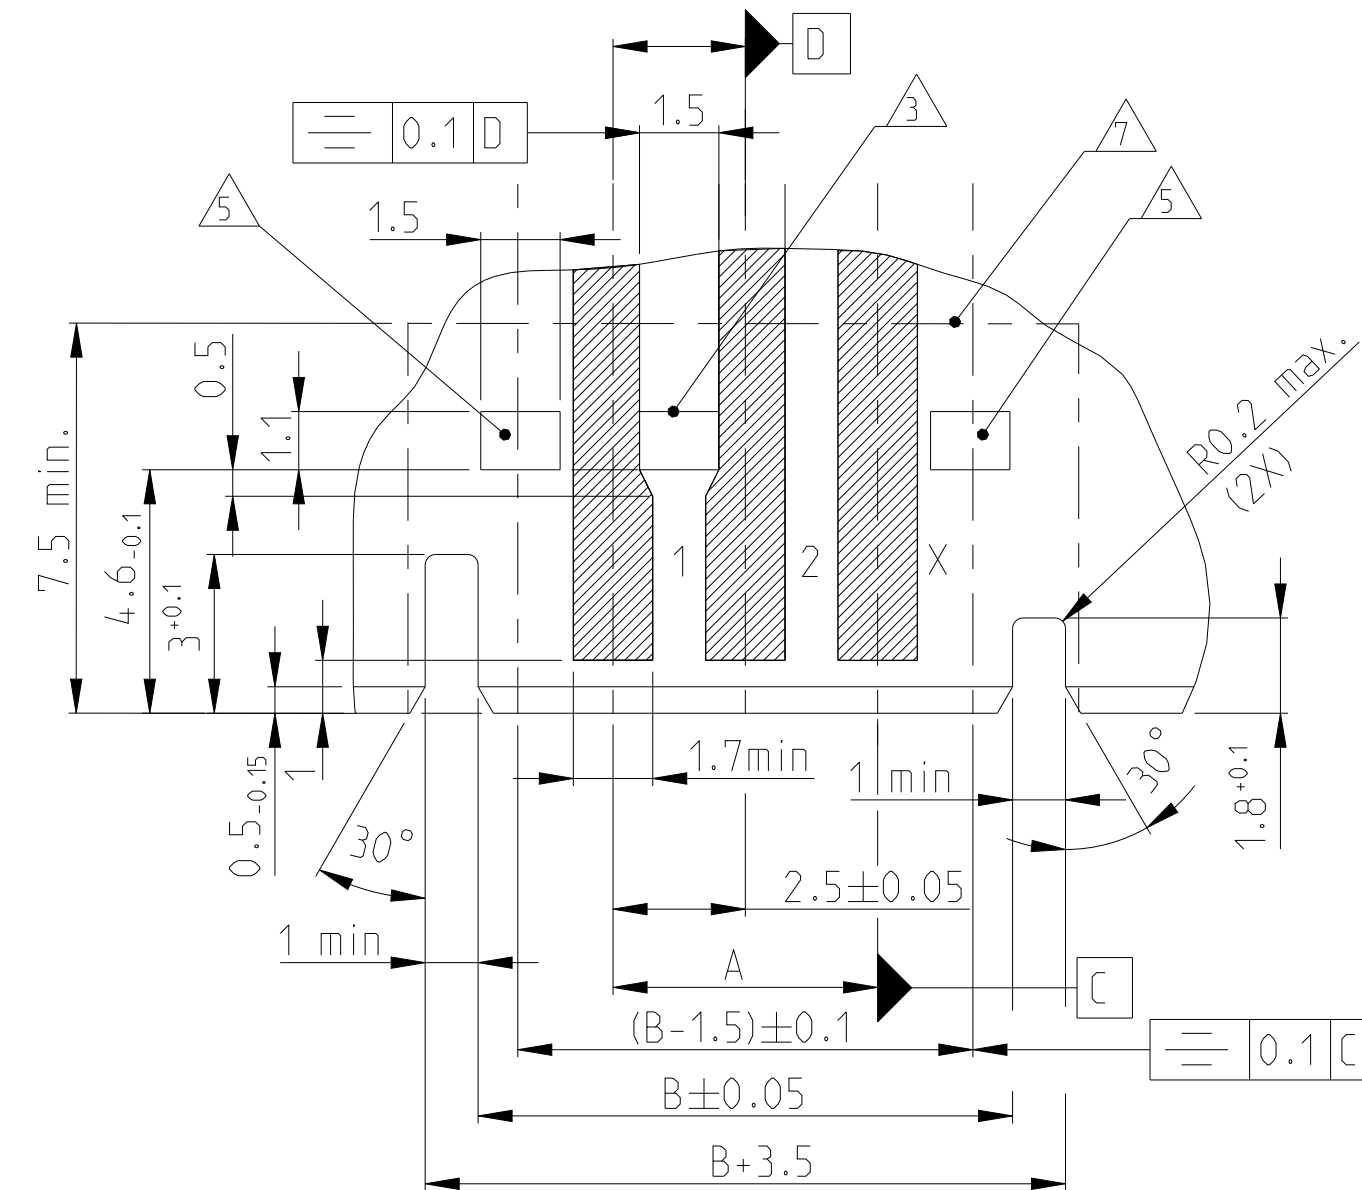


Technical drawing of a cross-section of a wire rope. The drawing shows a central core and surrounding strands. Dimensions include a width of 1.5 ± 0.2 and a height of 8.5 ± 0.6 . A dashed line indicates the wire direction, and a triangle symbol with the number 6 is shown.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE ELECTRONICS CORPORATION IT IS SUBJECT TO THE SAME CONTROL AND DOCUMENTATION REQUIREMENTS AND SHOULD BE CONTROLLED FOR THE LATEST REVISION.		DWN ATZMANN CHK BORMUTH		06 JULY 2019 06 JULY 2019		 TE CONNECTIVITY	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		AMP DUOPLUG 2.5 SYSTEM PCB RAHMEN AMP DUOPLUG 2.5 SYSTEM PCB FRAME (3-20 Posn)	
		0 PLC ± 1 PLC ±0.2 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±1°		APVD - PRODUCT SPEC - APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO	
MATERIAL PA 6.6 25%GF UL94 V-0		FINISH -		WEIGHT -		A - C=964575	
CUSTOMER DRAWING						SCALE 8:1 SHEET 1 of 2 REV D	

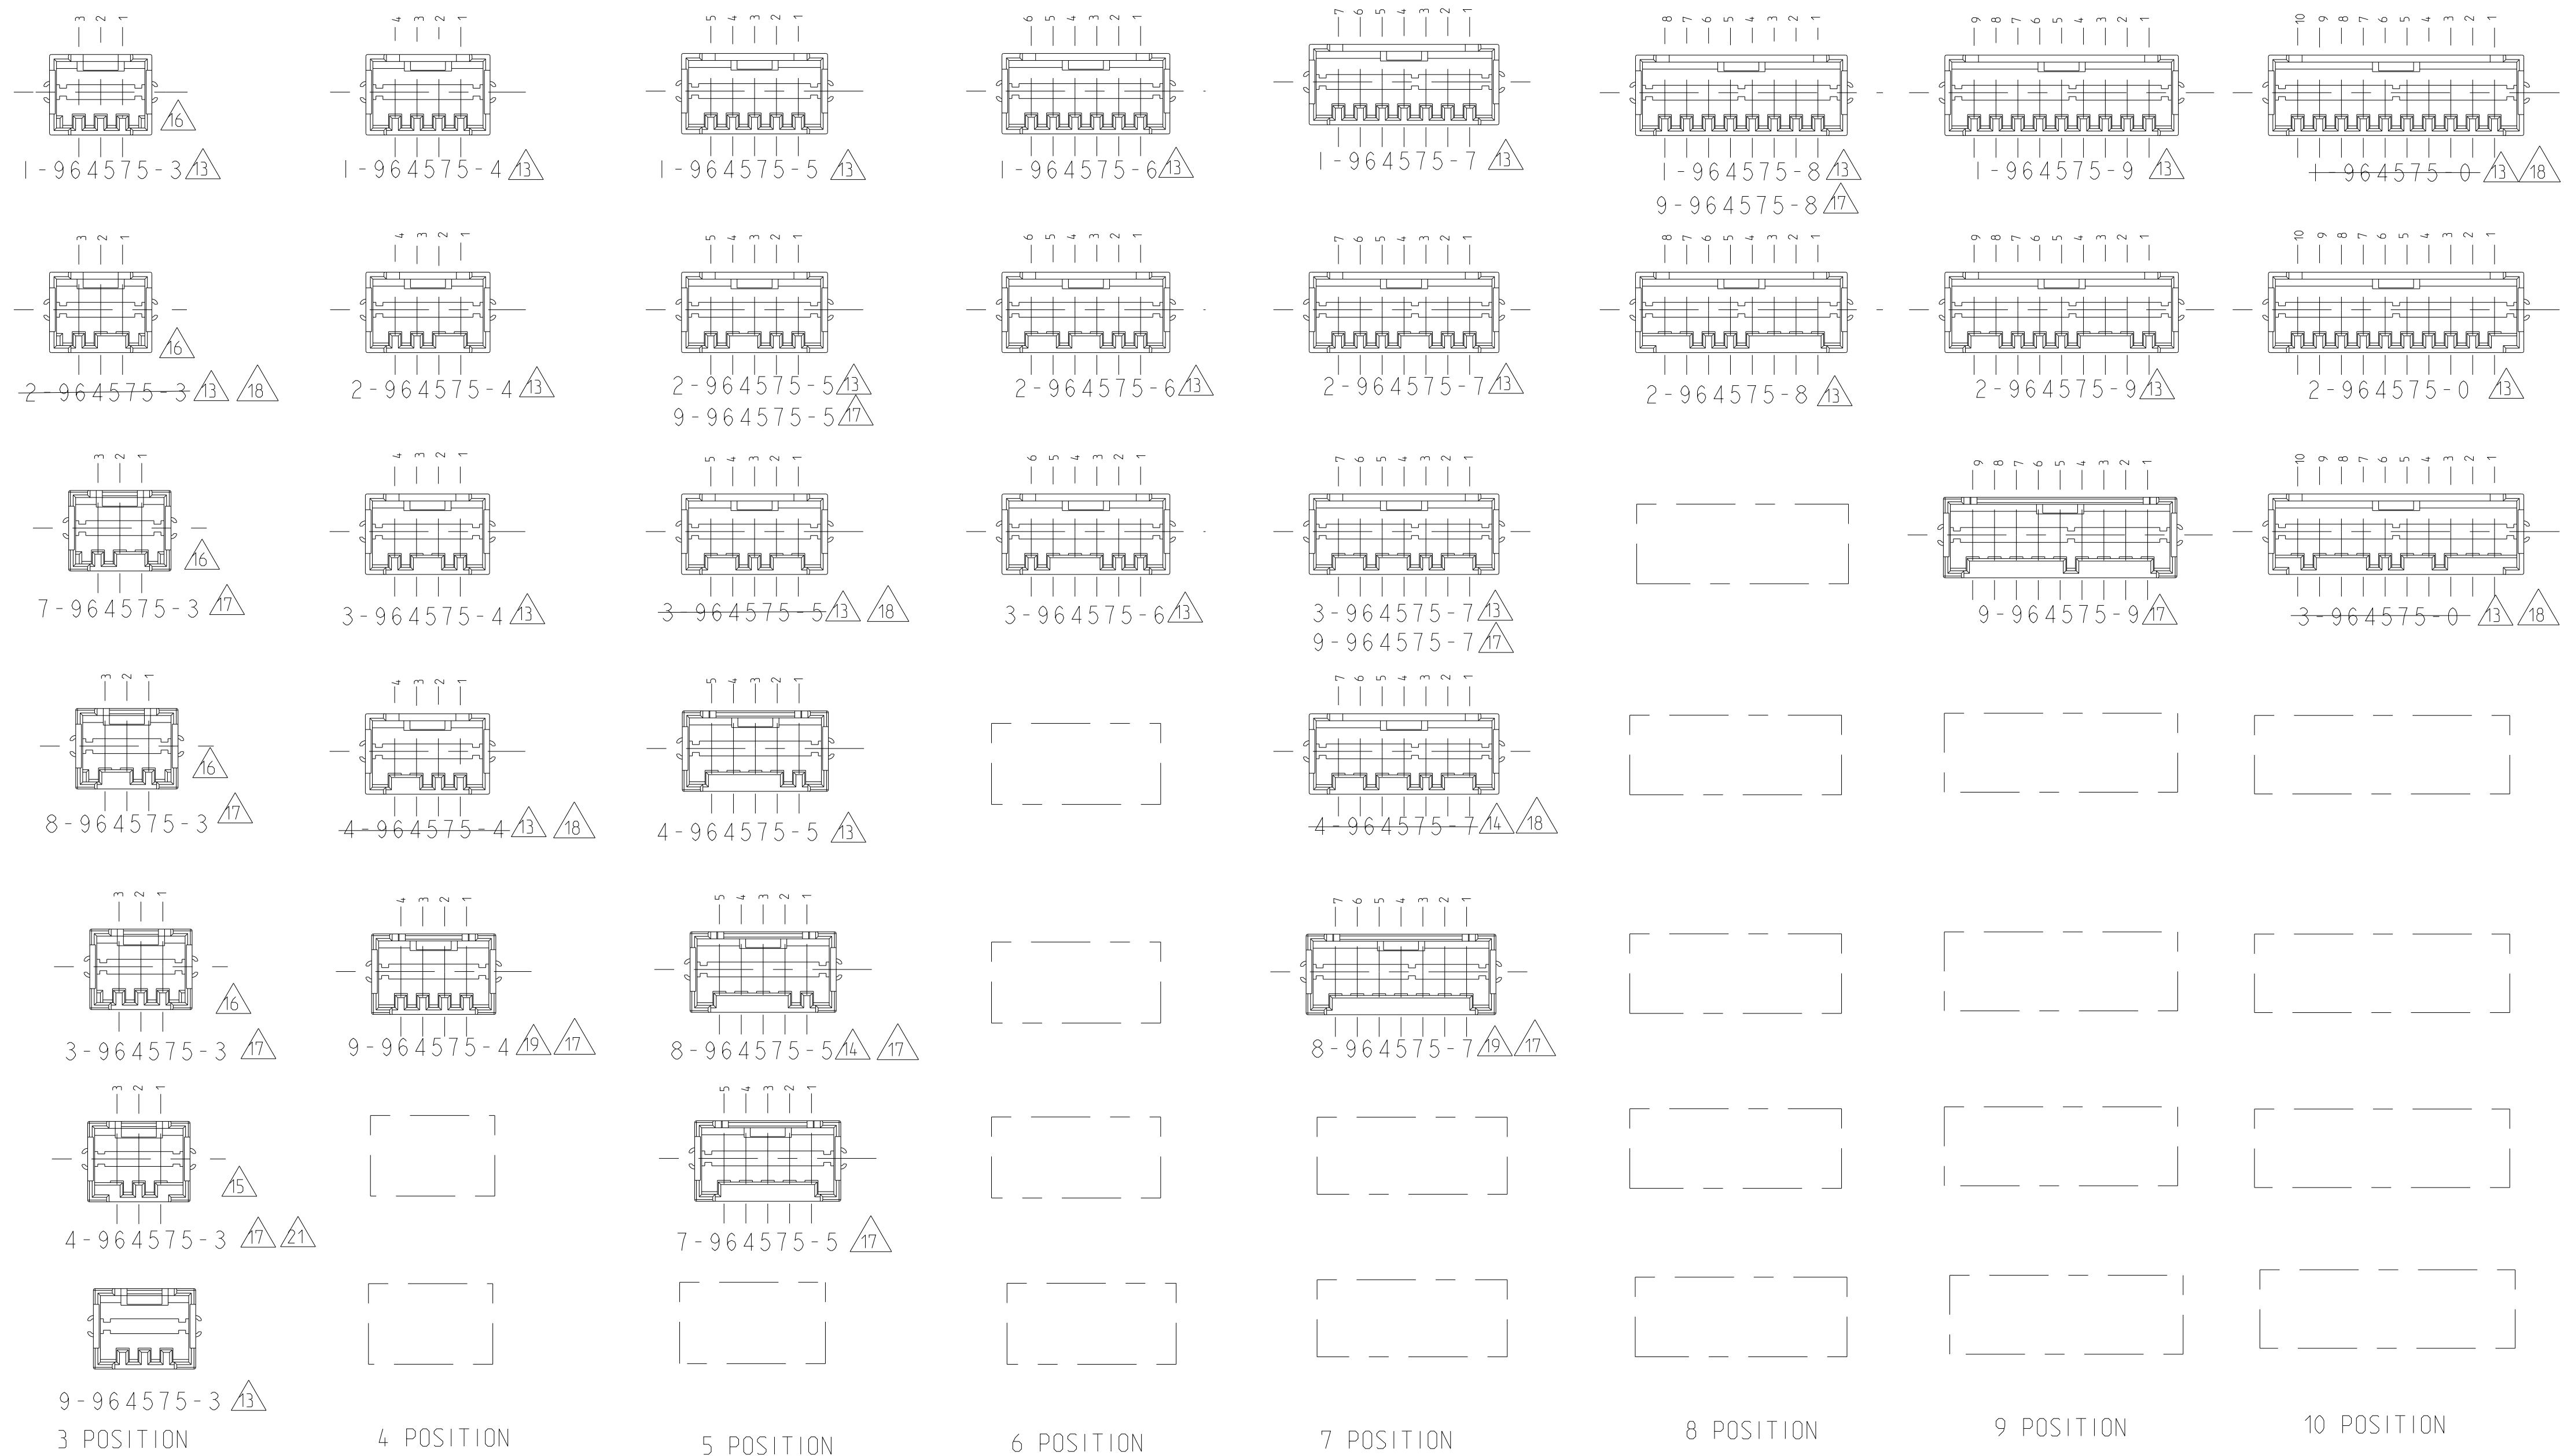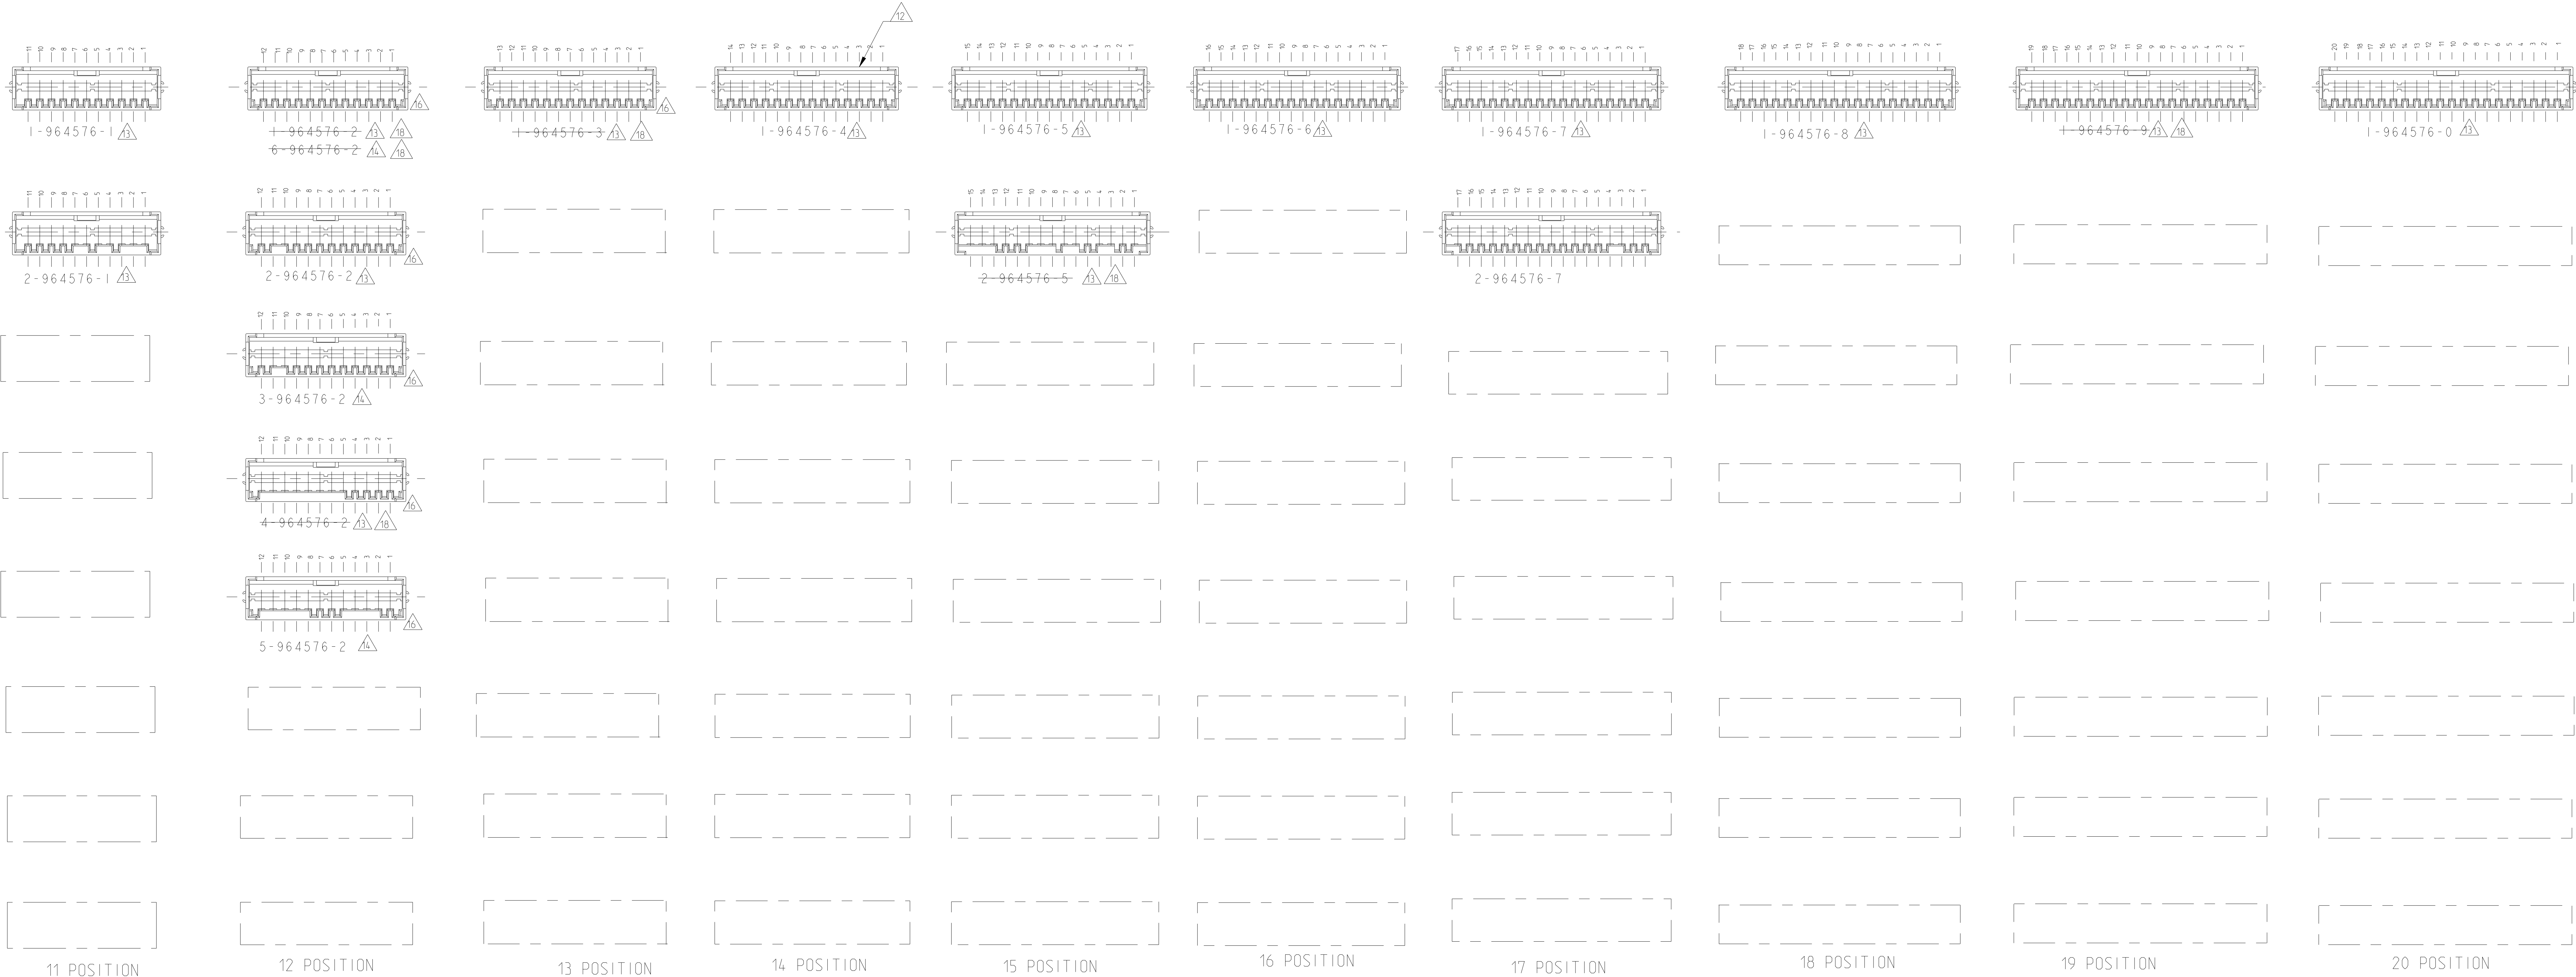

EXAMPLE:

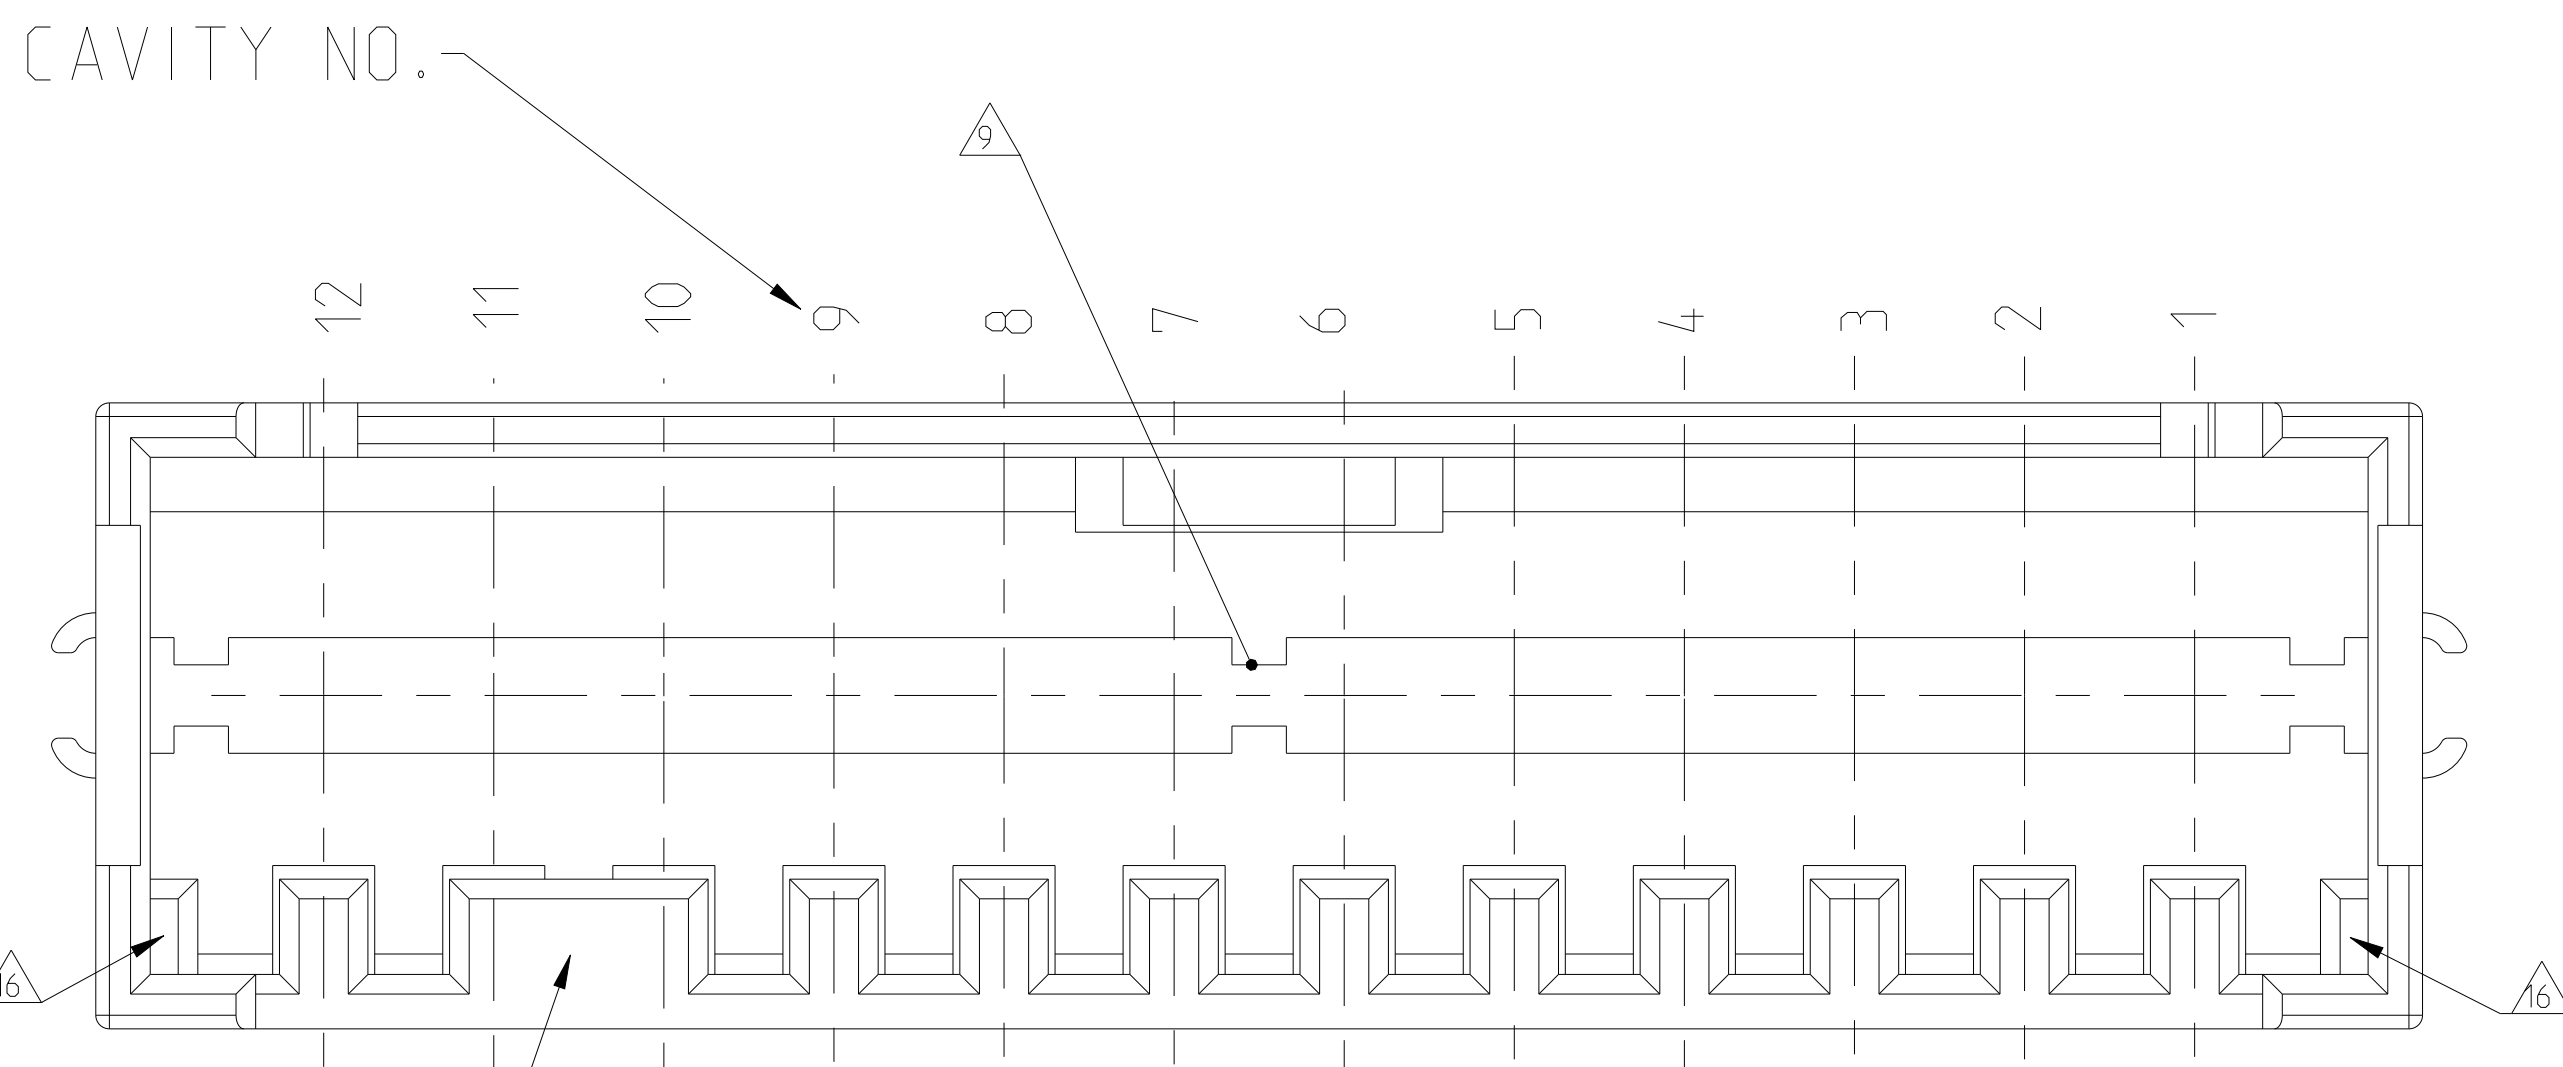

KEYING BETWEEN CAVITY 10 AND 11

X-964 XXX-5
PART NO.

COLOR

- 12 COLOR: BLACK
- 14 COLOR: NATURAL (REDBROWN)
- 16 NATURAL (BEIGE)