

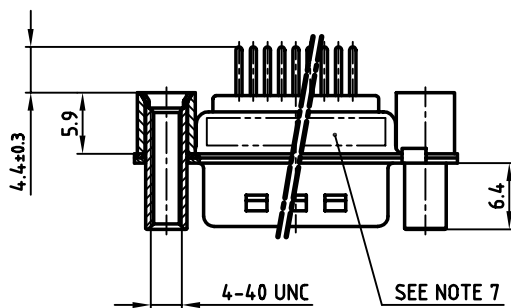


used for:	D-SUB
-----------	-------

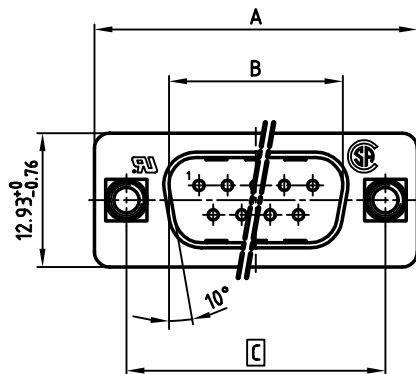

NOTES:

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. THREADED REAR SPACER/ FRONT THREADED LOCK:
COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
5. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
6. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
7. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
8. = CRITICAL DIMENSION

Directive 2002/95/EC
„RoHS“
Compliant

No. of pos.	A -0.76	B $+0.25$	C	D -0.3	Part No.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	163A13729X
15	39.52	25.12	33.30 $+0.15$ -0.1	6.12	163A13739X
25	53.42	38.84	47.04 ± 0.1	5.99	163A13749X
37	69.70	55.30	63.50 ± 0.13	5.99	163A13759X

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:
NAME: TITLE:
COMPANY NAME:
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance				scale: 2:1	
								material: SEE NOTES	
				2002	date	name		title: D-SUB MALE 9-37pos. Solder pin straight with threaded rear spacer, front threaded lock	
				drawn	17.10.	Parei			
				appd.	17.10.	Mickenbecker			
				norm	DIN 41652				
				d-old					
						dwg no:		AutoCAD 2000	DIN-A
						16K2A657		3	sh: 1/1
rev.	description	date	name			part no:		SEE TABLE	