

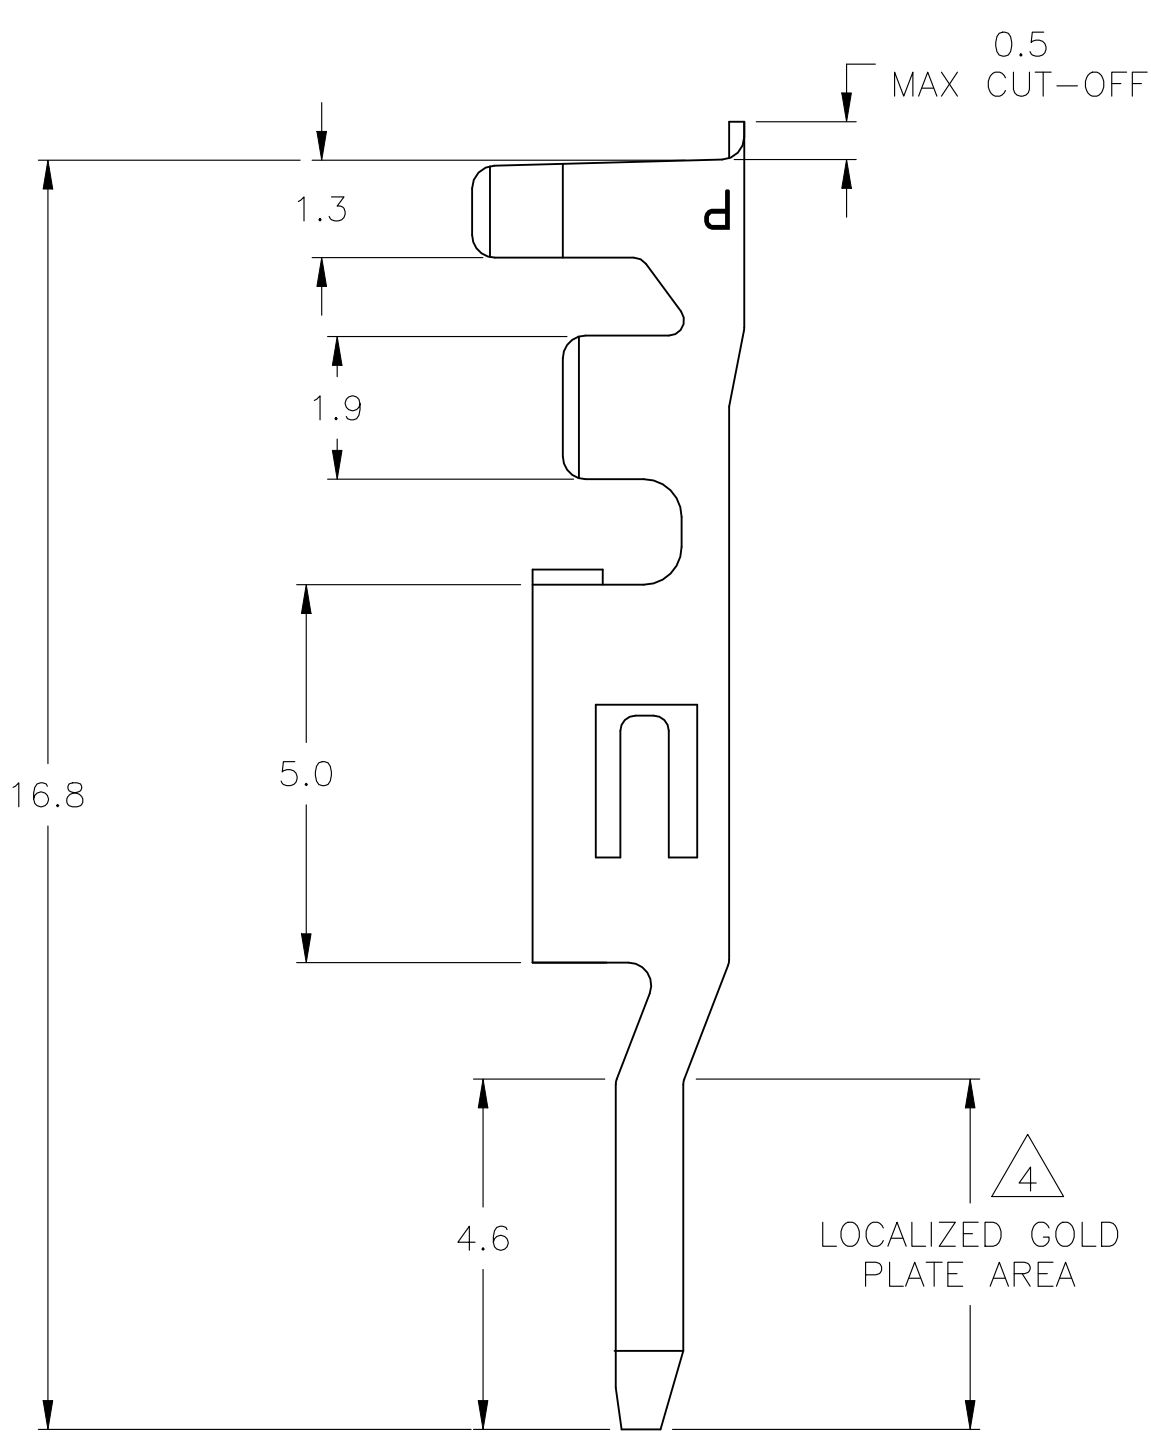



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECR-23-173068	06DEC2023	P.C	D.Z

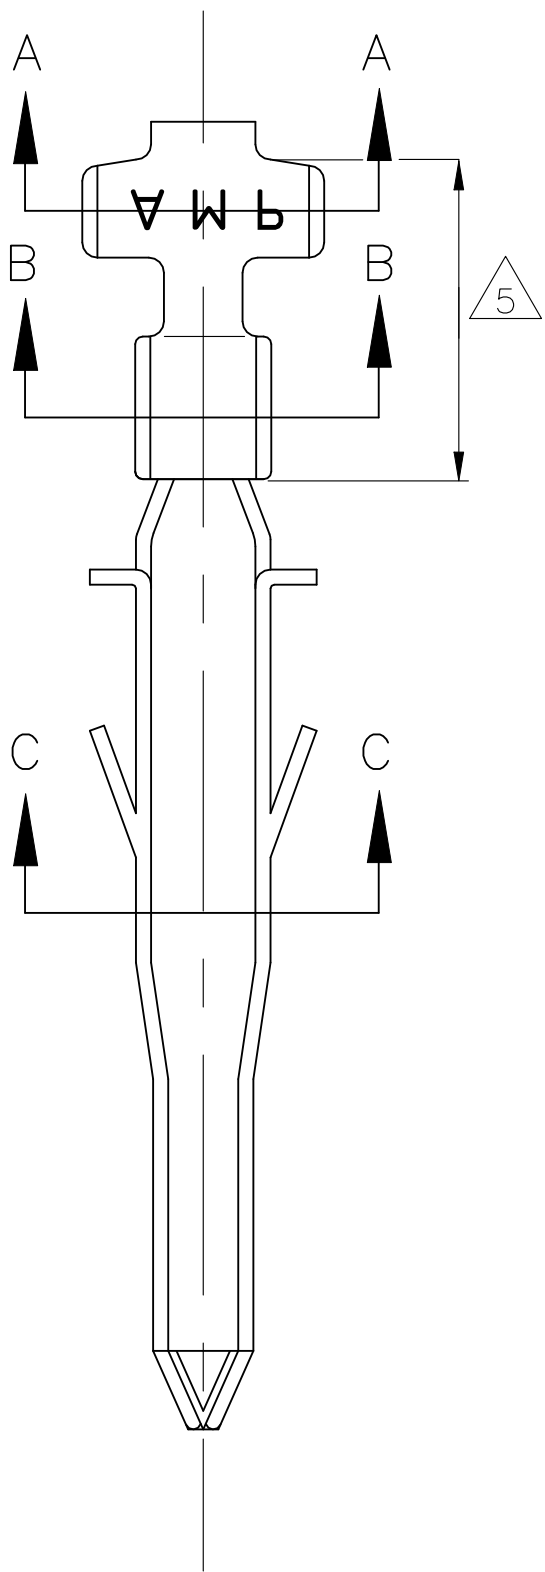


- 1 WIRE RANGE: 0.13–0.32mm² (26–22 AWG).
- 2 INSULATION RANGE: 1.20–1.75 DIA.
- 3 FINISH: 1.27μm MIN NICKEL ALL OVER
- 4 FINISH: 0.76μm MIN GOLD ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 5 FINISH: 2.54μm MIN TIN ON ALL SURFACES IN THIS AREA.
- 6 FINISH: 2.54μm MINIMUM PRE-TIN OVERALL

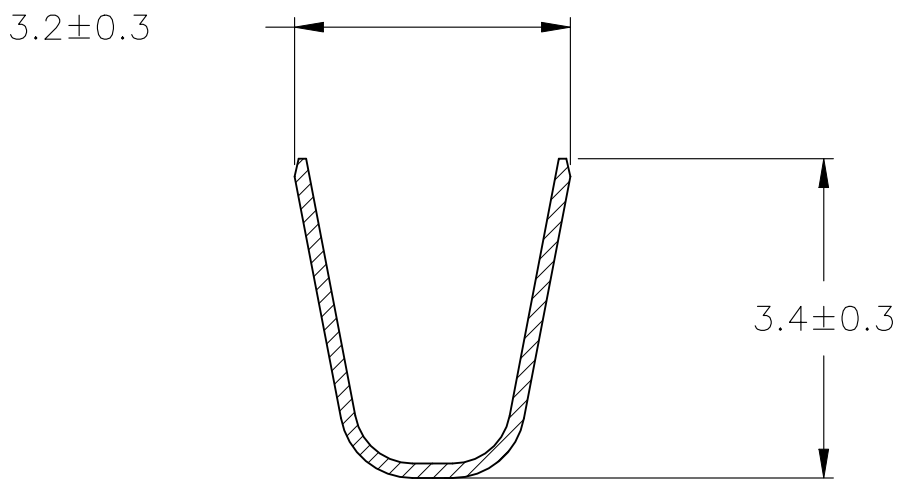

SECTION A-A

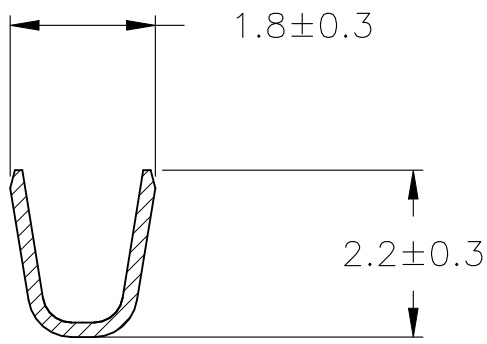

SECTION B-B

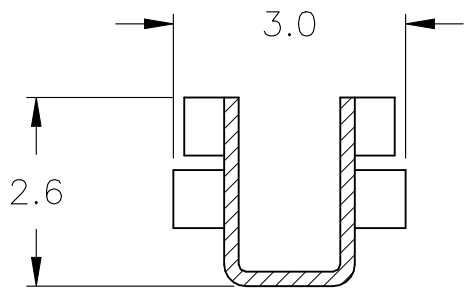

SECTION C-C

3 4 5	PHOS. BRZ.	1586316-4
PRE-TIN 6	PHOS. BRZ.	1586316-3
3 4 5	BRASS	1586316-2
PRE-TIN 6	BRASS	1586316-1
FINISH:	MATERIAL:	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 14-OCT-2003	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK D. COLEY 14-OCT-2003			
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 14-OCT-2003	NAME		
0 PLC ± 1 PLC ± 0.3 2 PLC ± - 3 PLC ± - 4 PLC ±		PRODUCT SPEC 108-2112	TERMINAL LOOSE PIECE, PIN VAL-U-LOK(TM)		
MATERIAL		FINISH	SIZE A2	CAGE CODE 00779	DRAWING NO C=1586316
			WEIGHT -	SCALE 10:1	SHEET 1 OF 1
			CUSTOMER DRAWING	REV A2	RESTRICTED TO -