


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N1	REVISED PER PCN-23-168440	04MAY2023	GK	RE

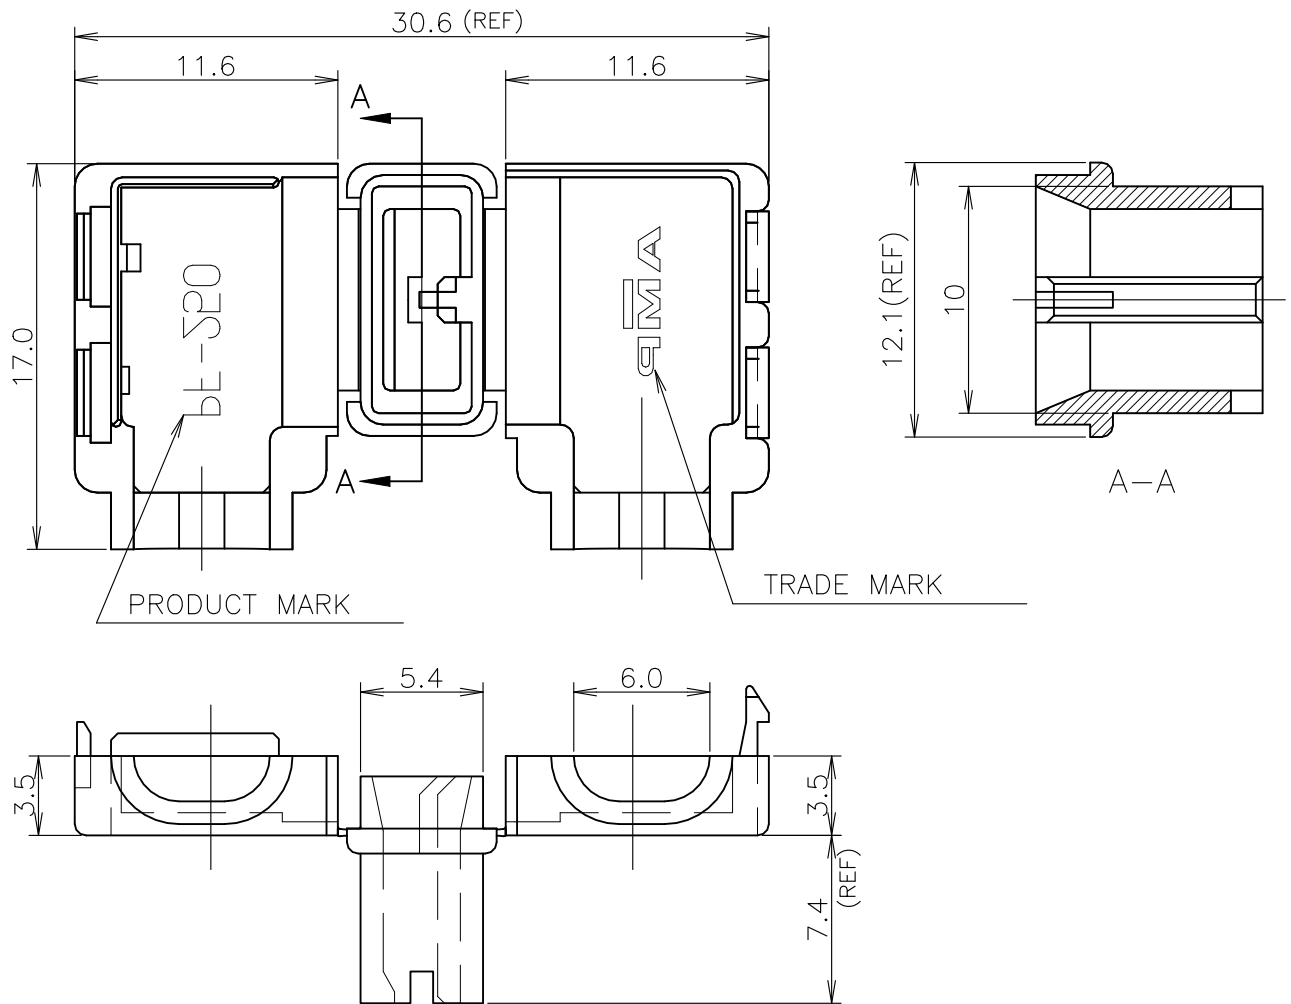

1 APPLICABLE CONTACT P/N: 175057-1

2 OBSOLETE PARTS: OBSOLETE CIS STERAMLINING PER D.RENAUD/D.SINSI

3 OBSOLETE PARTS

3	GWT,94V-0	(NATURAL)	7-176497-1
	94V-0	(BLACK)	1-176497-9
	94V-0	(RED)	1-176497-7
	94V-0	(BLUE)	1-176497-6
3	94V-0	(YELLOW)	1-176497-4
	94V-0	(NATURAL)	1-176497-1
	94V-2	(BLACK)	176497-9
	94V-2	(NATURAL)	176497-1
	UL GRADE	(COLOR)	(P/N)


GENERAL TOLERANCE

10 $\geq$: ± 0.2
30 $\geq$ > 10: ± 0.25
100 $\geq$ > 30: ± 0.3
ANGLES: $\pm 3^\circ$

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC $\pm -$
1 PLC $\pm -$
2 PLC $\pm -$
3 PLC $\pm -$
4 PLC $\pm -$
ANGLES $\pm -$



DWN Y.FUJITA 10NOV1989
CHK Y.FUJITA 10NOV1989
APVD N.ONOUE 11NOV1989
PRODUCT SPEC

APPLICATION SPEC

WEIGHT 0.000000

WIRE RANGE

MATERIAL

6/6 NYLON(SEE TABLE)

INSULATION DIA

mm²2.8~4.2 mm ϕ

FINISH



TE Connectivity

NAME
名称

ONE TOUCH SLEEVE
250 SERIES FLAG POSITIVE LOCK-EX

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

A4

00779

C-176497

CUSTOMER DRAWING

SCALE

NTS

SHEET

1 OF 1

REV J