
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – , – .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AD	47

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G4	IN ZONE B2 DIM 1.3 WAS 0.5	07NOV2022	DP	SH

1. MATERIAL: STAINLESS STEEL.
2. FINISH: PASSIVATE.
3. LOCTITE DRI–LOC 204 APPLIED IN THIS AREA.
4. RECOMMENDED P.C. BOARD DRILLED HOLE IS "B" DIAMETER.

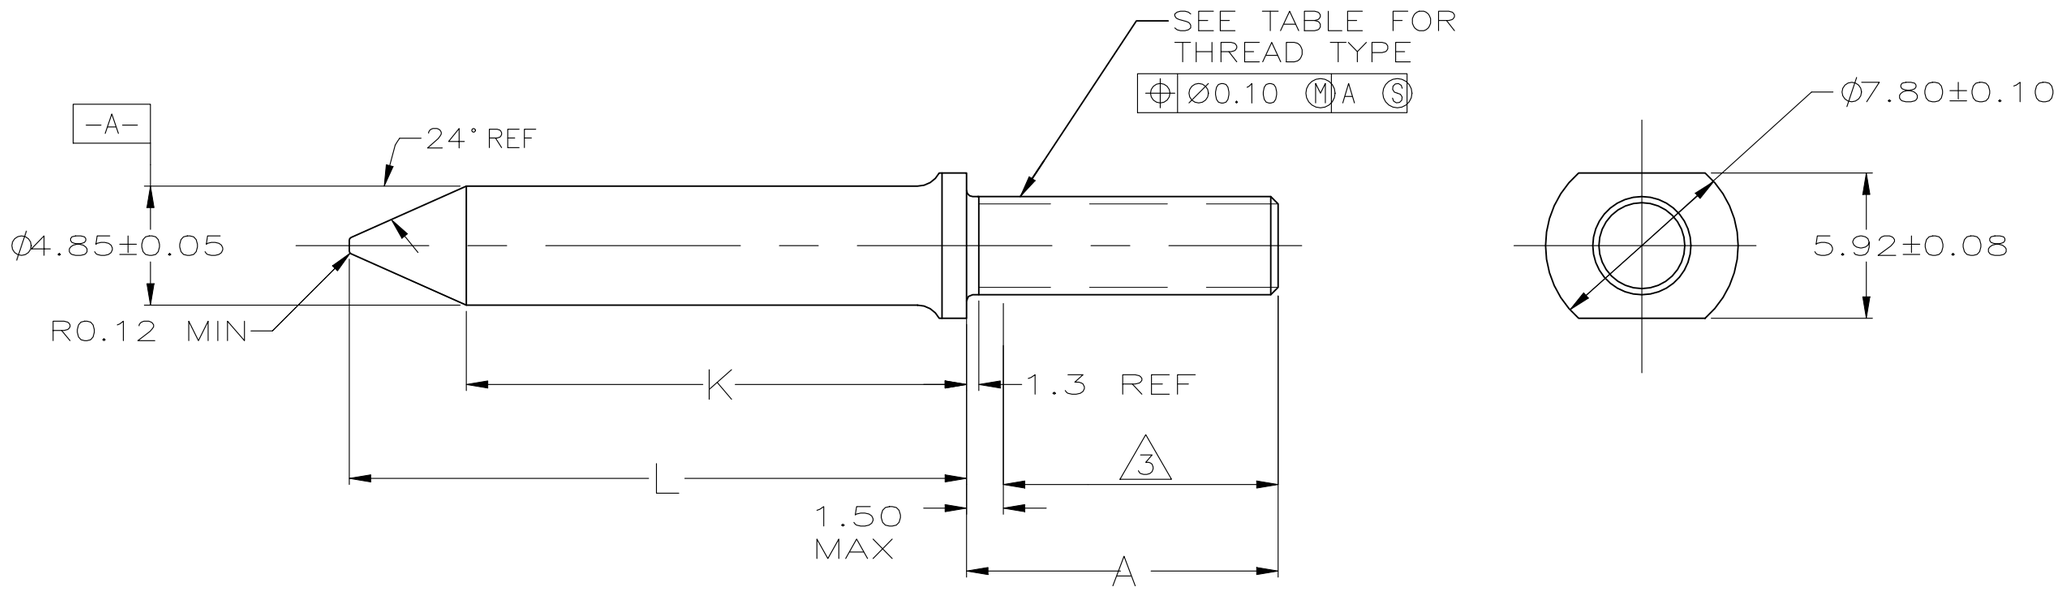

L	K	4 "B" DIA	A	THREAD TYPE	PART NUMBER
31.25	26.48	4.25±0.08	12.7	8–32 UNC 2A	1–223969–0
25.16	20.39	4.10±0.08	9.2	M4 X 7–6G	223969–7
25.16	20.39	4.25±0.08	12.7	8–32 UNC 2A	223969–4
25.16	20.39	4.10±0.08	12.7	M4 X 7–6G	223969–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± 2°

MATERIAL 1

FINISH 2 3

DWN	J.LOCONDRO	27MAR97
CHK	R.W.ELICKER	27MAR97
APVD	D.SINISI	27MAR97
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: GUIDE PIN, UNIVERSAL POWER MODULE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–223969	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV G4