

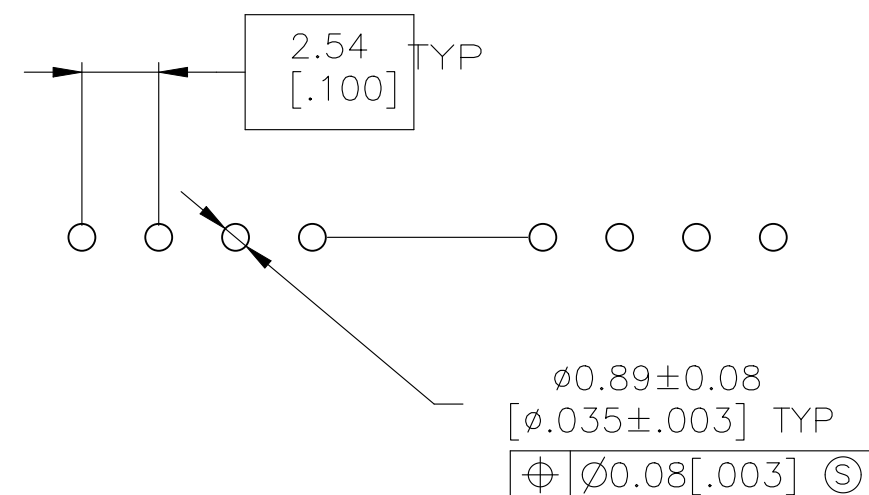
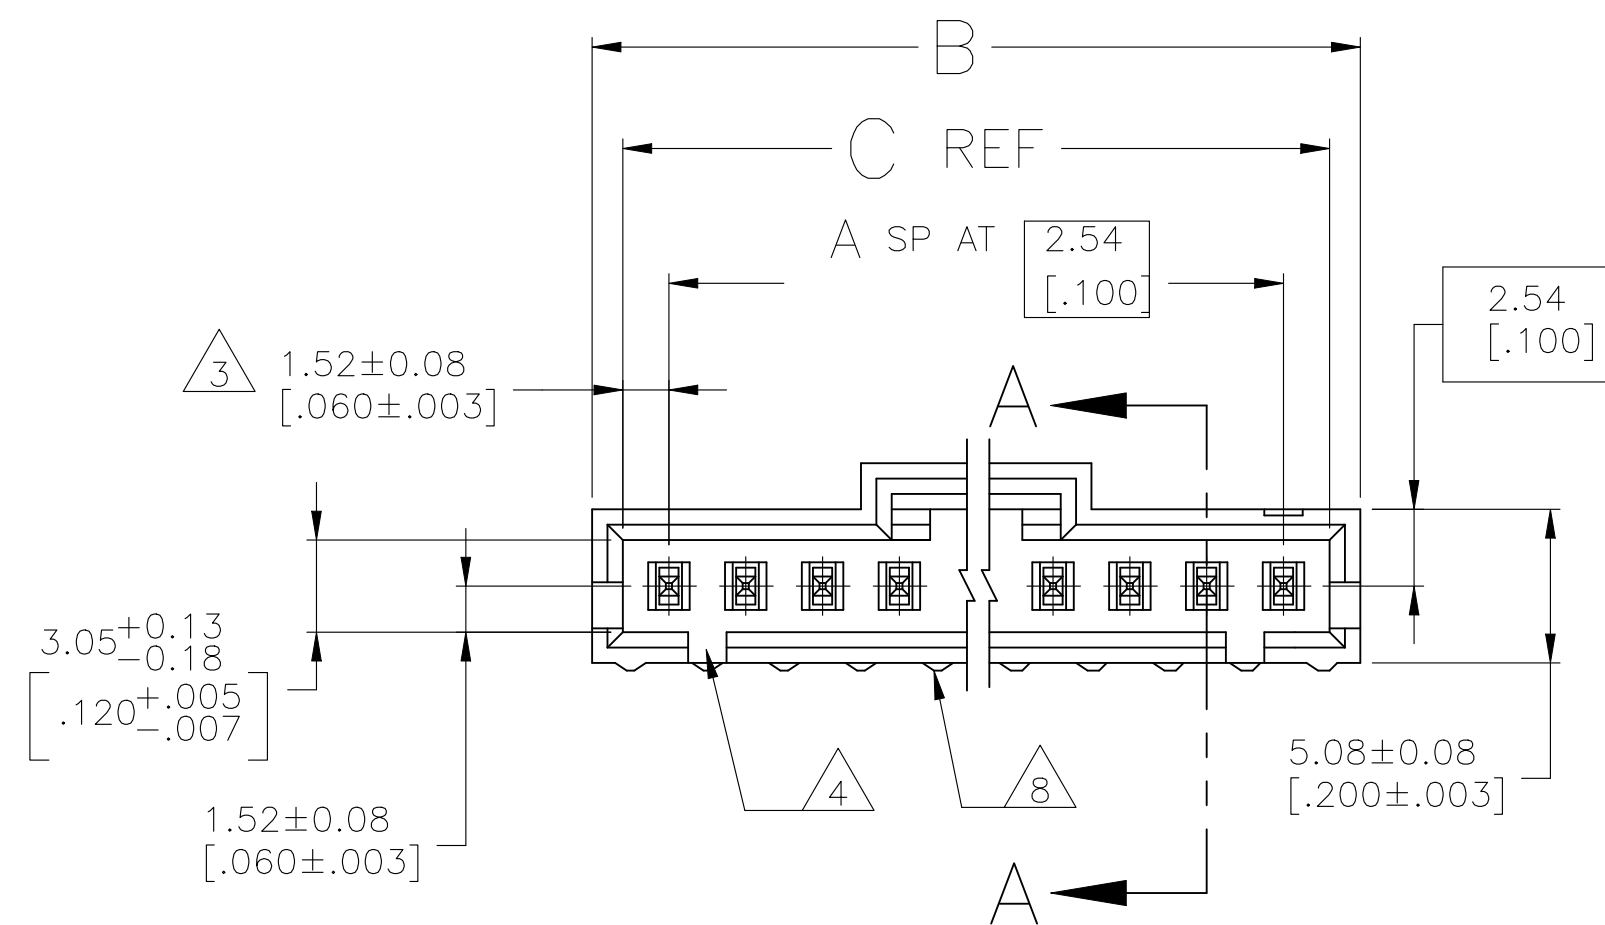


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AB2	ECR-26-269705	06FEB2026	ABS	PS

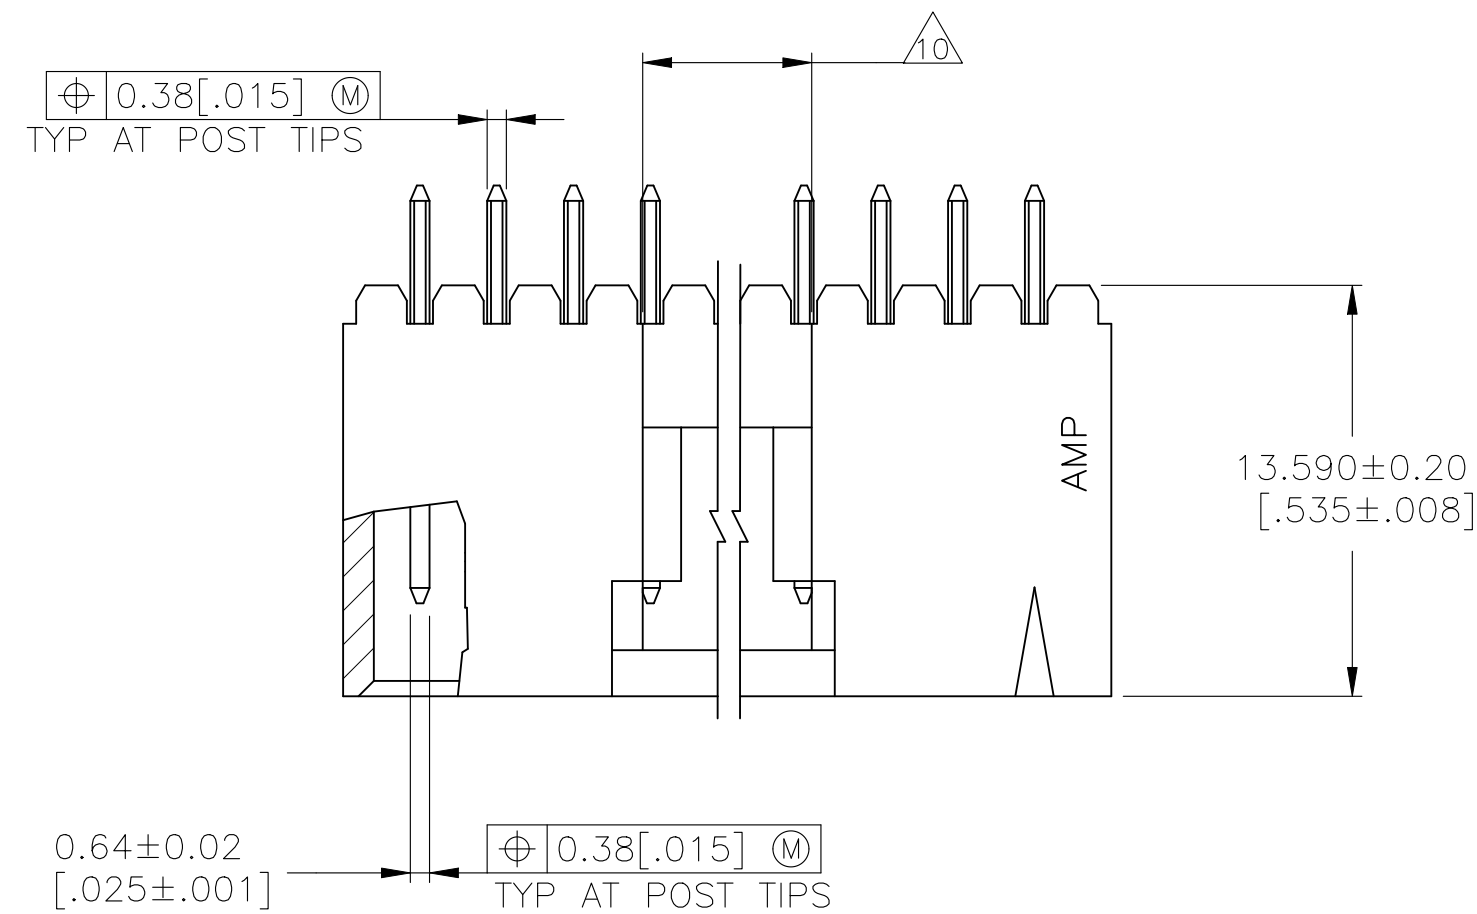

RECOMMENDED HOLE LAYOUT

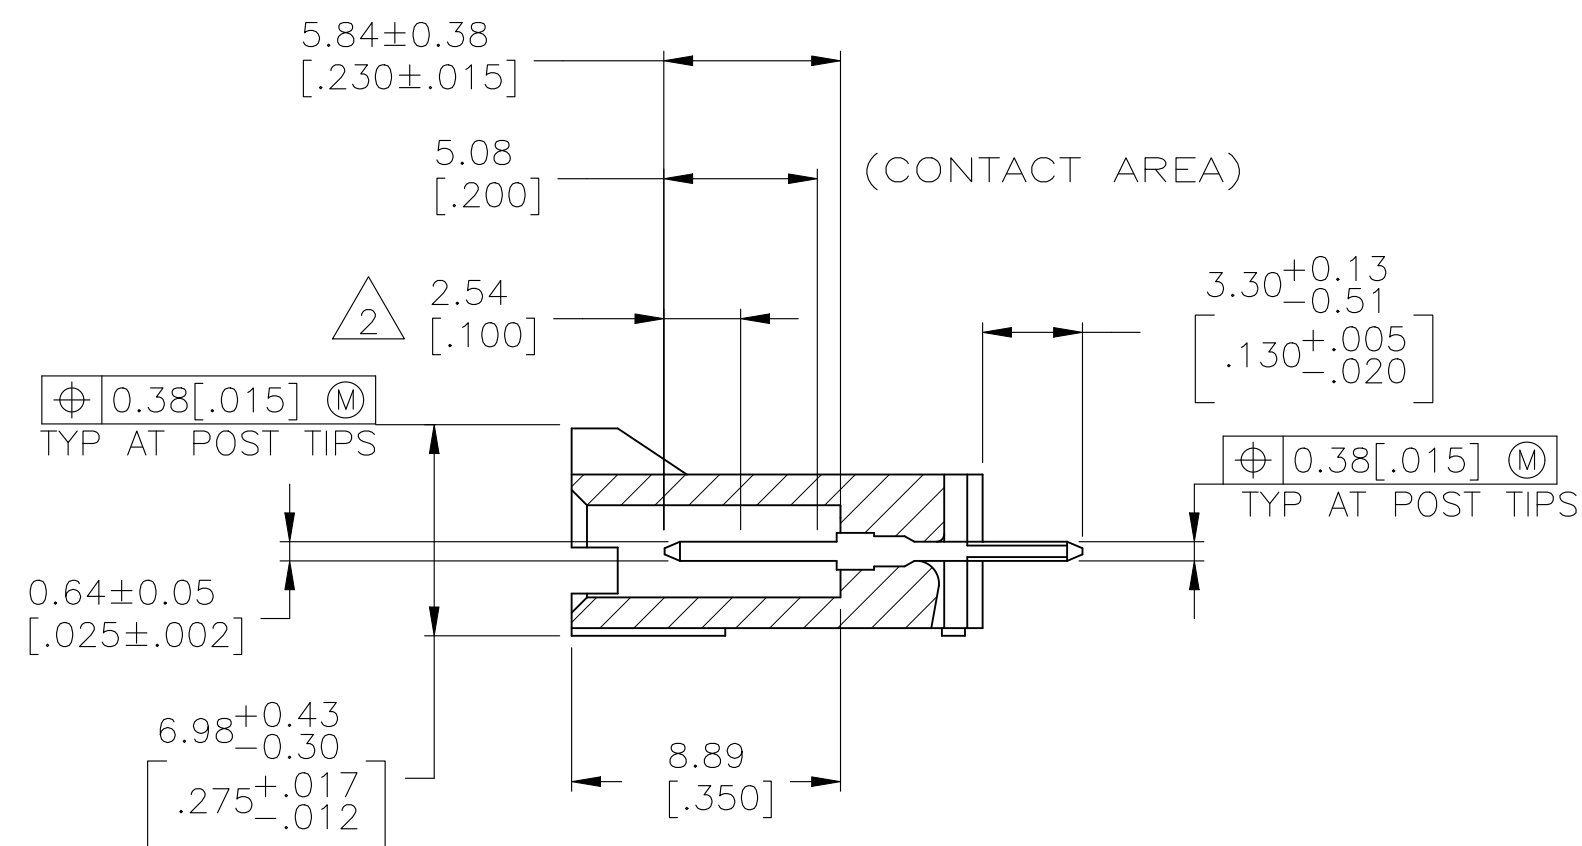

SECTION A-A

- ① .000100 BRIGHT TIN—LEAD OVER .000050 NICKEL.
- ② POINT OF MEASUREMENT FOR PLATING THICKNESS.
- ③ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- ④ ON ASSEMBLIES WITH FOUR OR MORE POSITIONS,
TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS,
ONE POLARIZATION SLOT.
- ⑤ .000100 BRIGHT TIN OVER .000050 NICKEL.
- ⑥ .000100 MATTE TIN OVER .000050 NICKEL.
- ⑦ HIGH TEMPERATURE CONFIGURATION
- ⑧ STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY
- ⑨ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER
D.RENAUD/D.SINISI
- ⑩ 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD
SHUT OFF

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.SHUEY 05MAR91 CHK 27MAR93		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± ± -		L.CASTAGNA 27MAR93 NAME HDR ASY,VERT,SNGL ROW 2.54[100] C/L 0.64[025] SQ PST, WTH PLZN<CHNG,AMPMODU MTE	
		PRODUCT SPEC 108-25034 APPLICATION SPEC 114-25026		SIZE A2 CAGE CODE - DRAWING NO C-103639 RESTRICTED TO -	
MATERIAL HOUSING:		FINISH SEE TABLE		CUSTOMER DRAWING SCALE 4:1 SHEET 1 of 2 REV AR2	

