
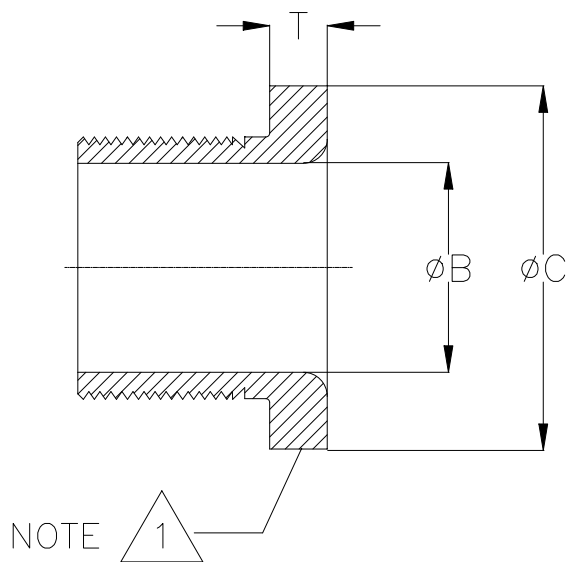
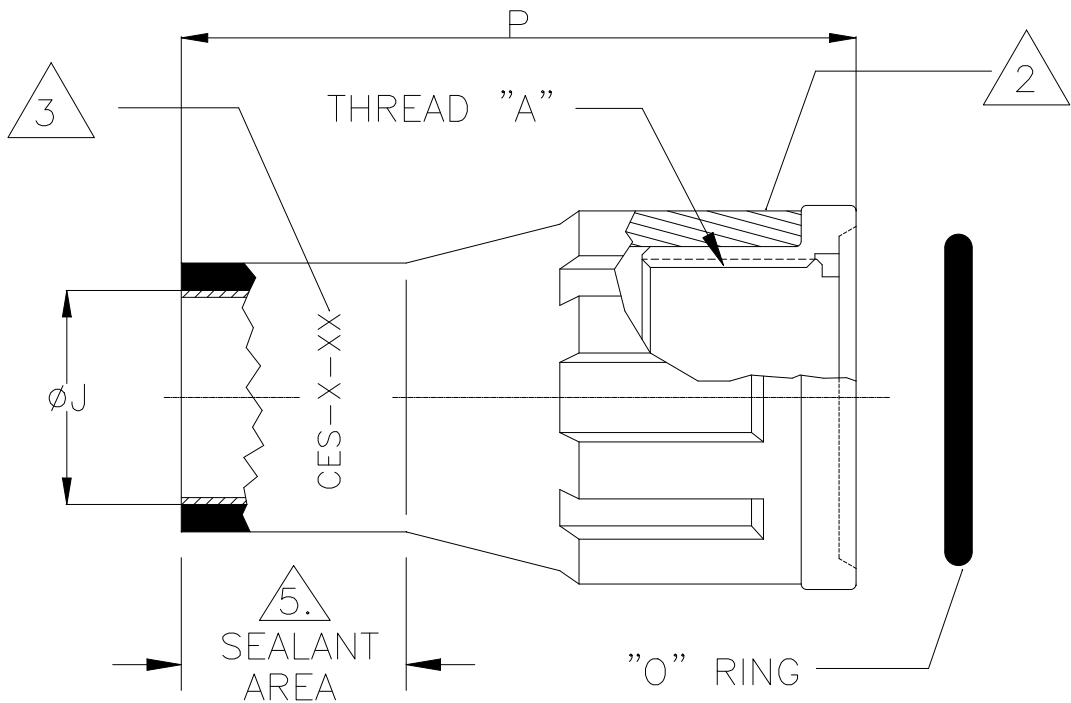


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G3	REVISED PER ECN ECN-25-345032	25SEP2025	CG	MM

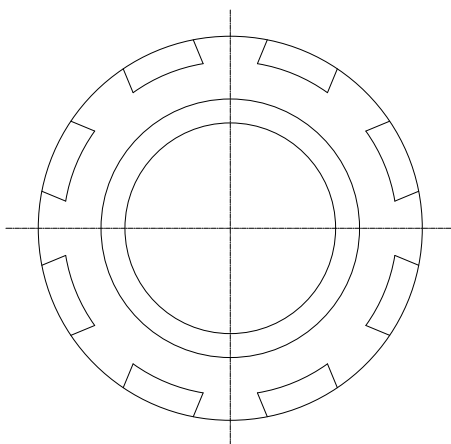

PART DESCRIPTION	"A" THREAD	ØB ±.02	ØC REF	ØJ		P REF REC	T REF	PANEL THK 4
				MIN EXP	MAX REC			
CES-1-XX	1-12 UNF	.75 [19,05]	1.40 [35,56]	.50 [12,7]	.16 [4,07]	2.45 [62,23]	.21 [5,34]	1/4 [6,35]
CES-2-XX	1-12 UNF	.75 [19,05]	1.40 [35,56]	.75 [19,05]	.25 [6,35]	2.45 [62,23]	.21 [5,34]	1/4 [6,35]
CES-3-XX	1 3/8-12 UNF	1.10 [27,94]	1.90 [48,26]	1.20 [30,48]	.50 [12,7]	3.55 [90,17]	.31 [7,88]	3/8 [9,65]
CES-4-XX	2-8 UN	1.56 [39,62]	2.70 [68,58]	1.60 [40,64]	.75 [19,05]	3.85 [97,79]	.31 [7,88]	1/2 [12,7]
CES-5-XX	3 3/8-8 UN	2.90 [73,66]	4.10 [104,14]	2.75 [70,48]	1.38 [35,06]	7.50 [190,50]	.31 [7,88]	3/4 [19,05]

NOTES:

1. THE LAST TWO "X's" IN THE PART NUMBER DESIGNATE MATERIAL AS SHOWN BELOW:
"AL": ALUMINUM 6061-T6 WITH FINISH OF HARD ANODIZE PER MIL-A-8625F, TYPE III, CLASS 2, DYED BLACK.
"SS": STAINLESS STEEL TYPE 316, WITH FINISH OF PASSIVATE PER ASTM-A967.
FOR STANDARD BLACK NYLON MATERIAL, OMIT THE LAST TWO "X's" IN THE PART NO.

2. HEAT SHRINKABLE BOOT MATERIAL IN ACCORDANCE WITH -3 POLYOLEFIN

3. PART TO BE MARKED AS SHOWN, REPLACE "X's" WITH APPROPRIATE CHARACTERS (e.g. CES-3-AL).

4. THIS PART IS DESIGNED TO FIT THROUGH A PANEL OR BULKHEAD WITH A MAXIMUM WALL THICKNESS AS INDICATED IN TABLE.

5. FACTORY APPLIED HOT MELT ADHESIVE IS STANDARD.

6. PRODUCT SPECIFICATION : RT-1335
(INCLUDES RECOMMENDED INSTALLATION TORQUE VALUES)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	10/27/08	TE Connectivity		
		CHK	05/09/22			
		APVD	05/09/22	NAME		
		PRODUCT SPEC		CABLE ENTRY SEALS STANDARD		
		APPLICATION SPEC				
		WEIGHT	0	SIZE	CAGE CODE	RESTRICTED TO
		CUSTOMER DRAWING		A3	06090	—
		SCALE	DNS	SHEET	1 OF 1	REV
						G3