


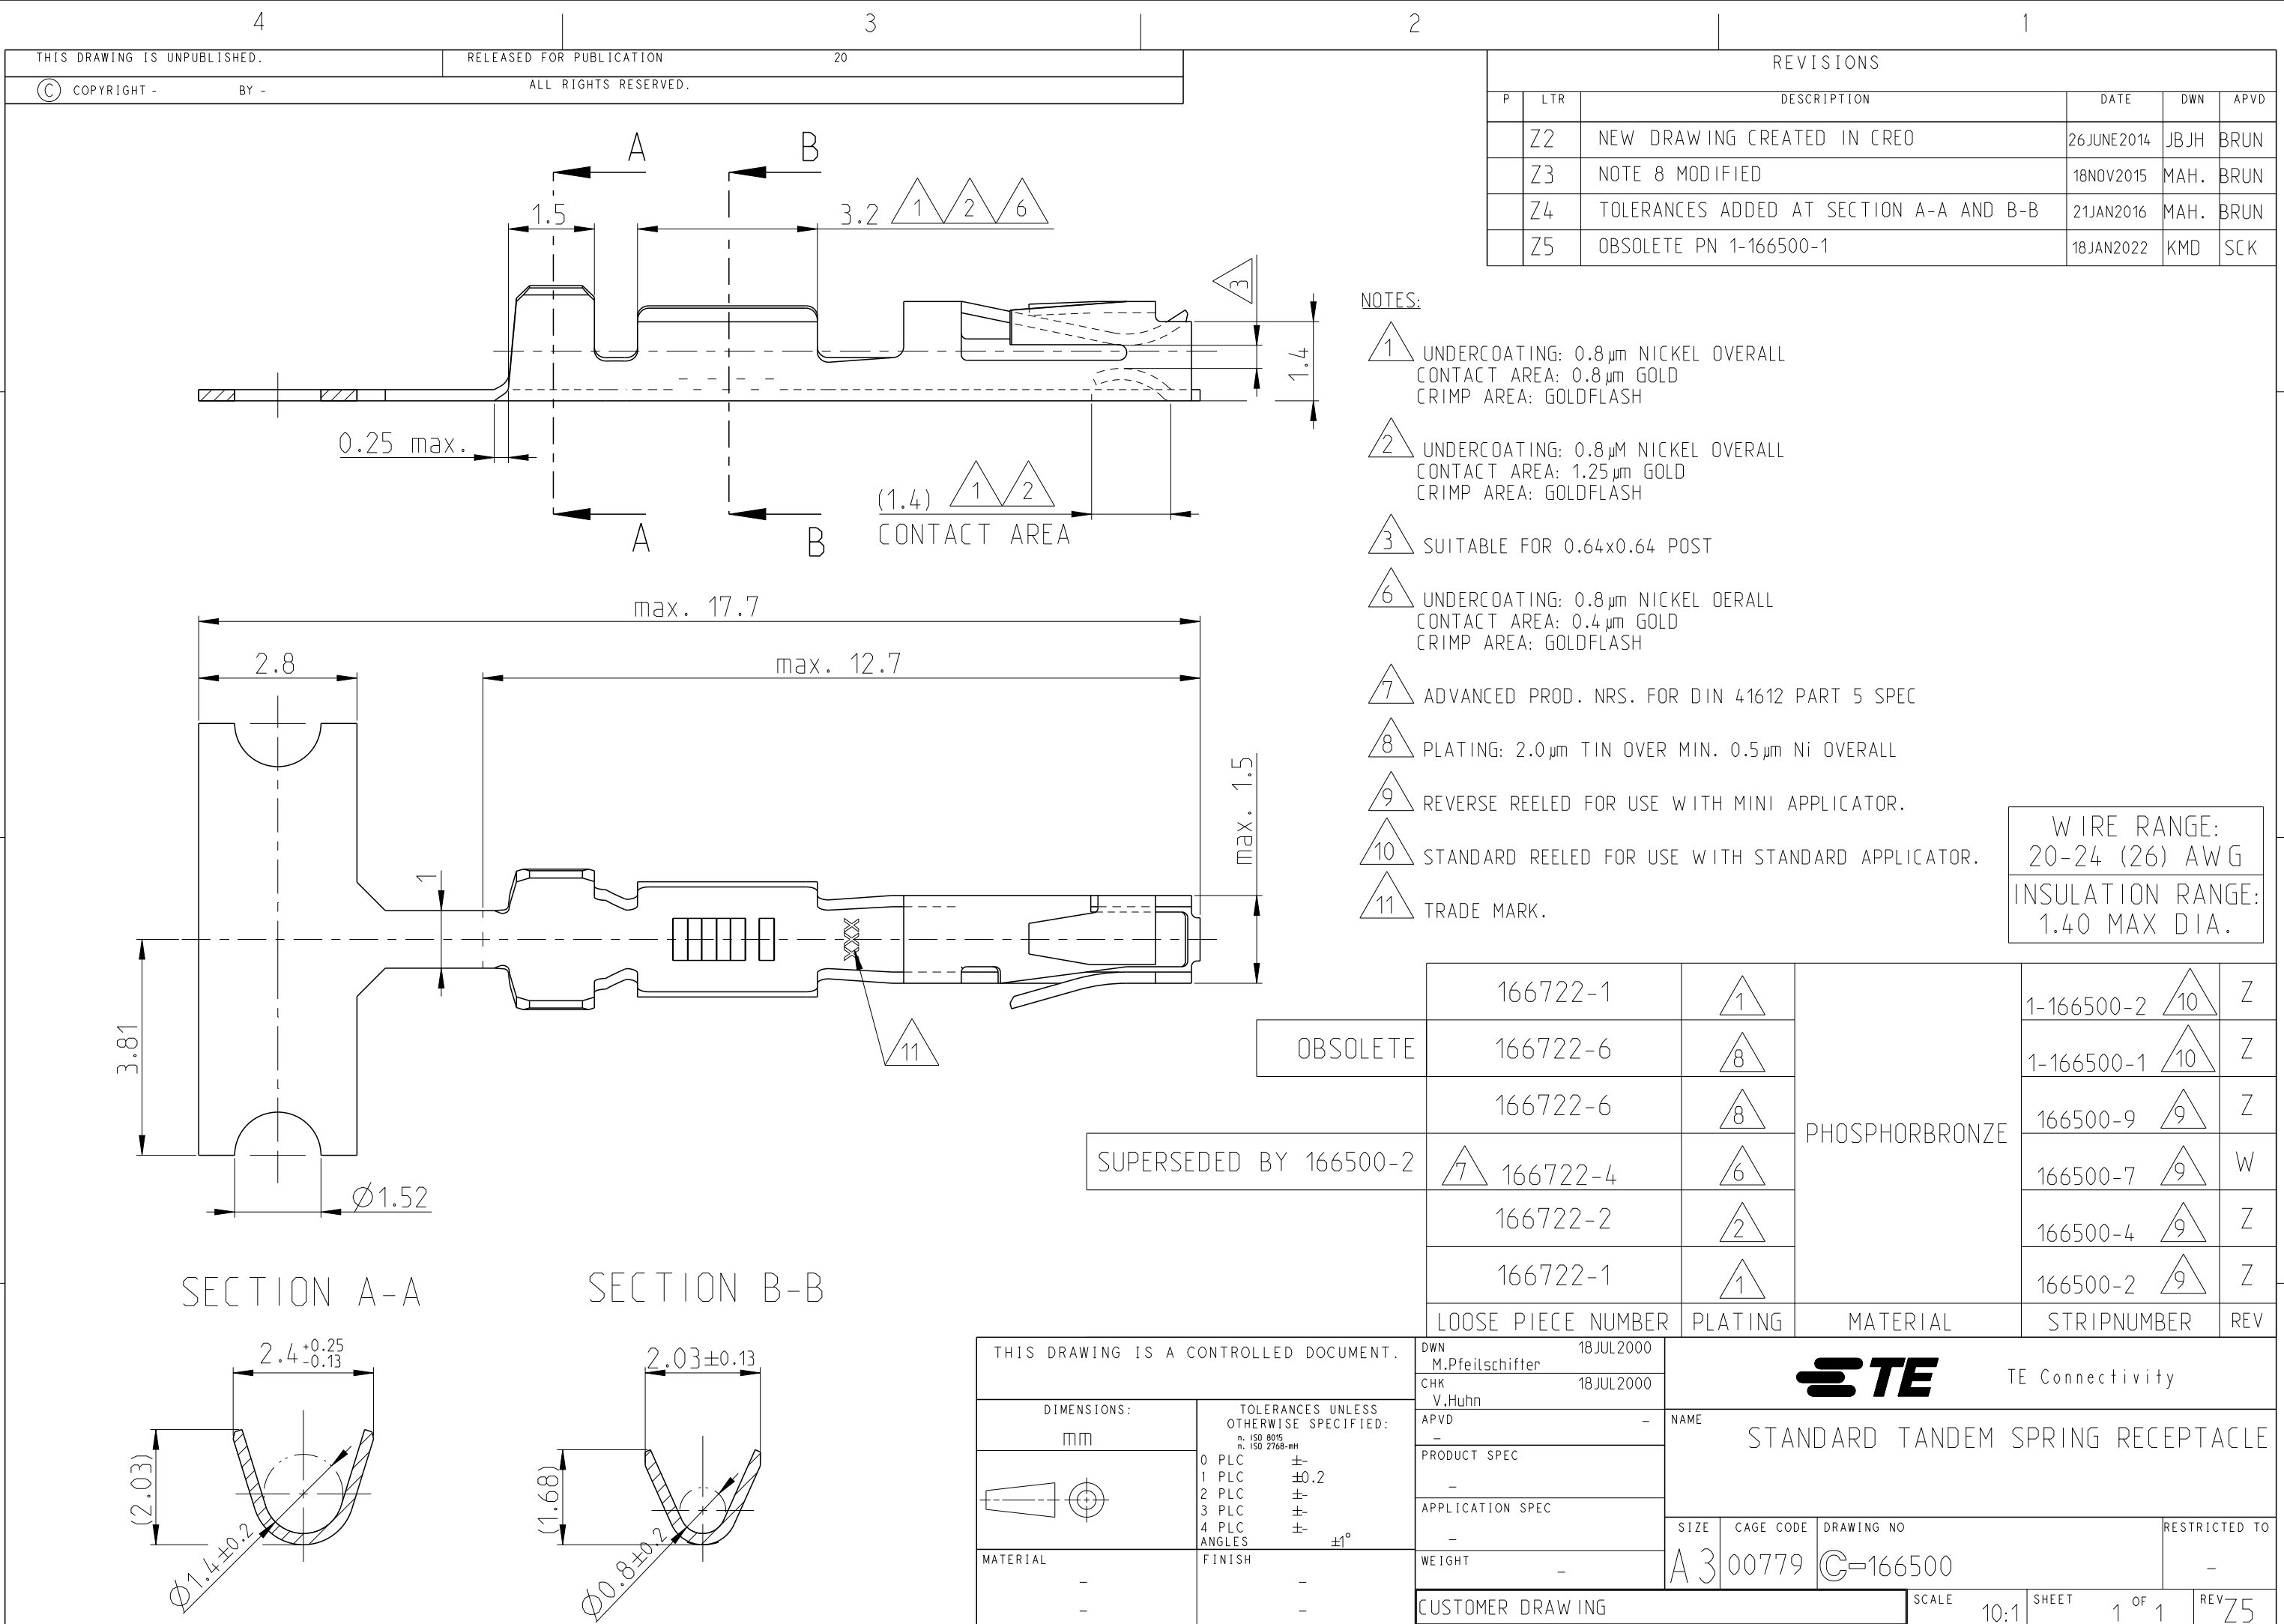

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Z2	NEW DRAWING CREATED IN CREO	26JUNE2014	JBJH	BRUN
	Z3	NOTE 8 MODIFIED	18NOV2015	MAH.	BRUN
	Z4	TOLERANCES ADDED AT SECTION A-A AND B-B	21JAN2016	MAH.	BRUN
	Z5	OBSOLETE PN 1-166500-1	18JAN2022	KMD	SCK

- NOTES:
- 1 UNDERCOATING: 0.8 μ m NICKEL OVERALL
CONTACT AREA: 0.8 μ m GOLD
CRIMP AREA: GOLDFLASH
 - 2 UNDERCOATING: 0.8 μ m NICKEL OVERALL
CONTACT AREA: 1.25 μ m GOLD
CRIMP AREA: GOLDFLASH
 - 3 SUITABLE FOR 0.64x0.64 POST
 - 6 UNDERCOATING: 0.8 μ m NICKEL OVERALL
CONTACT AREA: 0.4 μ m GOLD
CRIMP AREA: GOLDFLASH
 - 7 ADVANCED PROD. NRS. FOR DIN 41612 PART 5 SPEC
 - 8 PLATING: 2.0 μ m TIN OVER MIN. 0.5 μ m Ni OVERALL
 - 9 REVERSE REELED FOR USE WITH MINI APPLICATOR.
 - 10 STANDARD REELED FOR USE WITH STANDARD APPLICATOR.
 - 11 TRADE MARK.

WIRE RANGE: 20-24 (26) AWG
INSULATION RANGE: 1.40 MAX DIA.

OBSOLETE	166722-1	1	PHOSPHORBRONZE	1-166500-2	10	Z
	166722-6	8		1-166500-1	10	Z
	166722-6	8		166500-9	9	Z
	166722-4	6		166500-7	9	W
	166722-2	2		166500-4	9	Z
SUPERSEDED BY 166500-2	166722-1	1		166500-2	9	Z
	LOOSE PIECE NUMBER	PLATING	MATERIAL	STRIPNUMBER	REV	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.Pfeilschifter 18JUL2000	 TE Connectivity			
DIMENSIONS: mm		CHK V.Huhn 18JUL2000				
TOLERANCES UNLESS OTHERWISE SPECIFIED: n. ISO 8015 n. ISO 2768-mH		APVD -	NAME STANDARD TANDEM SPRING RECEPTACLE			
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		PRODUCT SPEC -	SIZE A3			
FINISH		APPLICATION SPEC -				
MATERIAL -		WEIGHT -	CAGE CODE 00779			
			DRAWING NO 166500			
			RESTRICTED TO -			
			SCALE 10:1			
			SHEET 1 OF 1			
			REV Z5			