
© 2023TE Connectivity. All Rights Reserved.


1473562-4:AS SHOWN
1473562-4:本図


REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED	01AUG2023	H.O	T.S

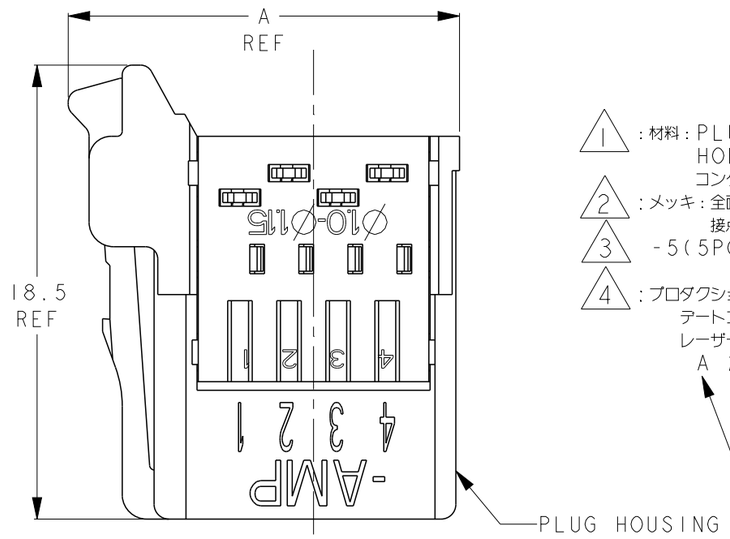

△1 :材料:PLUG HOUSING:ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
HOLD HOUSING:ポリカーボネイト 94V-0 黄色:0- 、赤色:1- 、青色:2-
コンタクト:銅合金
△2 :メッキ:全面Ni下地:1.27μm以上
接点部:金めっき 0.2μm以上
△3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません
△4 :プロダクションラインによってデートコードが記載されているものがあります。
デートコードの内容 : 6桁
レーザーマーカーによる印字

△1.MATERIAL:PLUG HOUSING :GLASS FILED THEMOPLASTIC,94V-0,BLACK
HOLD HOUSING :PC, 94V-0, YELLOW:0- ,RED:1- ,BLUE:2-
CONTACT :COPPER ALLOY
△2.FINISH:UNDERPLATE :Ni 1.27μm min
CONTACT AREA :Au 0.2μm min
△3.X--5(5POS) AND X--7(7POS)DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.
△4.SOME PRODUCTION LINES HAVE DATE CODES LISTED.
DATE CODE : 6 DIGITS
SHALL BE MARKED BY LASER MARKER.



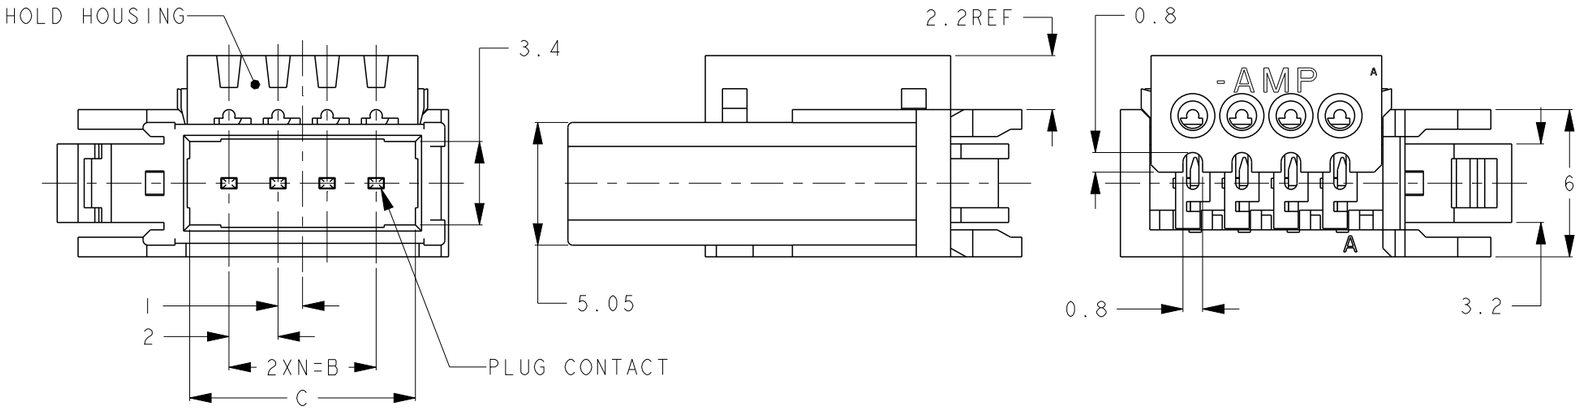

BLUE	20.35	17.2	14	24.1	7	8	2-1473562-8
RED	20.35	17.2	14	24.1	7	8	1-1473562-8
YELLOW	20.35	17.2	14	24.1	7	8	1473562-8
BLUE	20.35	17.2	14	24.1	7	7	△3 2-1473562-7
RED	20.35	17.2	14	24.1	7	7	△3 1-1473562-7
YELLOW	20.35	17.2	14	24.1	7	7	△3 1473562-7
BLUE	16.35	13.2	10	20.1	5	6	2-1473562-6
RED	16.35	13.2	10	20.1	5	6	1-1473562-6
YELLOW	16.35	13.2	10	20.1	5	6	1473562-6
BLUE	16.35	13.2	10	20.1	5	5	△3 2-1473562-5
RED	16.35	13.2	10	20.1	5	5	△3 1-1473562-5
YELLOW	16.35	13.2	10	20.1	5	5	△3 1473562-5
BLUE	12.35	9.2	6	16.1	3	4	2-1473562-4
RED	12.35	9.2	6	16.1	3	4	1-1473562-4
YELLOW	12.35	9.2	6	16.1	3	4	1473562-4
BLUE	10.35	7.2	4	14.1	2	3	2-1473562-3
RED	10.35	7.2	4	14.1	2	3	1-1473562-3
YELLOW	10.35	7.2	4	14.1	2	3	1473562-3
HOLD HSG COLOR	D	C	B	A	N	POS	P/N

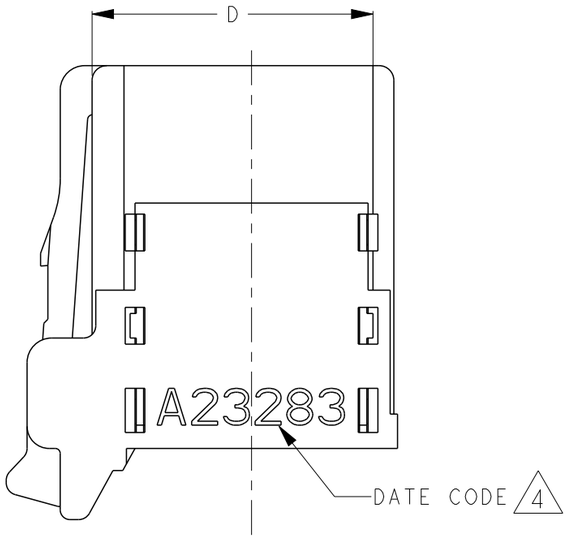


Table of Insulation Dia (Cable suitable for e-CON.) 被覆外径一覧表(e-CON 適応電線)			
ORANGE	φ0.60~0.90	3-1473562-□	SEE SHEET 3
RED	φ0.90~1.00	1-1473562-□	SEE SHEET 1
YELLOW	φ1.00~1.15	1473562-□	SEE SHEET 1
BLUE	φ1.15~1.35	2-1473562-□	SEE SHEET 1
GUREEN	φ1.35~1.60	4-1473562-□	SEE SHEET 2
HOLD HSG COLOR	INSULATION DIA	PART NUMBER	SHEET No

・取扱説明書(Instruction Sheet):411-78014

WIRE RANGE 抱合電線断面積	INSULATION DIA 被覆外径
SEE 108-5765	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 般公差

0 PLC	±-	
1 PLC	±-	±0.2
2 PLC	±-	±3°
3 PLC	±-	
4 PLC	±-	
ANGLES	±-	

MATERIAL 材料 △1
FINISH 仕上 △2

DWN D.MITSUGI	10SEP2001
CHK S.MANABE	10SEP2001
APVD S.MANABE	10SEP2001
PRODUCT SPEC 製品規格	108-5765
APPLICATION SPEC 取付適用規格	-
WEIGHT	-

TE Connectivity


NAME 名称: PLUG ASSY FOR e-CON - RITS CONN. -

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-1473562	-


CUSTOMER DRAWING | SCALE 尺度 4:1 | SHEET 1 OF 3 | REV D

© 2023TE Connectivity. All Rights Reserved.

REVISIONS 変更						
P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD



4-1473562-4:AS SHOWN
4-1473562-4:本図

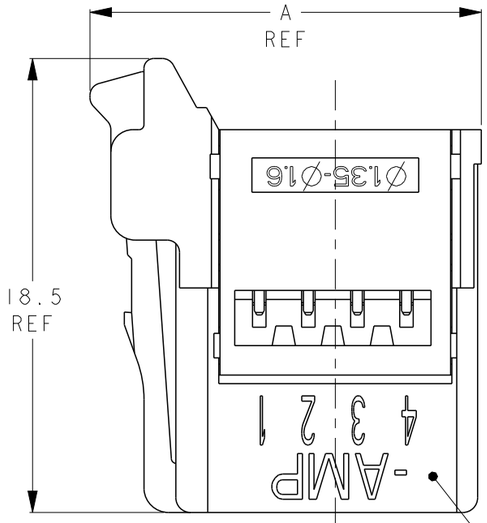


△1 :材料:PLUG HOUSING:ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
HOLD HOUSING:ポリカーボネイト 94V-0 緑色:4-
コンタクト:銅合金

△2 :メッキ:全面Ni下地:1.27μm以上
接点部:金めっき 0.2μm以上

△3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません

△4 :プロダクションラインによってデートコードが記載されているものがあります。
デートコードの内容 : 6桁
レーザーマーカーによる印字




△1 .MATERIAL:PLUG HOUSING :GLASS FILED THEMOPLASTIC,94V-0,BLACK
HOLD HOUSING :PC, 94V-0, GREEN:4-
CONTACT :COPPER ALLOY


△2 .FINISH:UNDERPLATE :Ni 1.27μm min
CONTACT AREA :Au 0.2μm min


△3 X--5(5POS) AND X--7(7POS)DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.


△4 .SOME PRODUCTION LINES HAVE DATE CODES LISTED.
DATE CODE : 6 DIGITS
SHALL BE MARKED BY LASER MARKER.



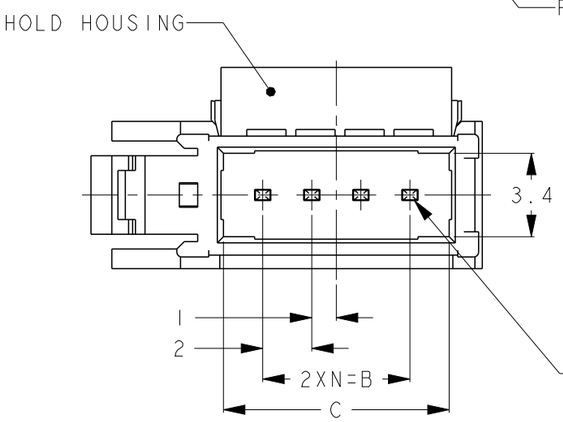

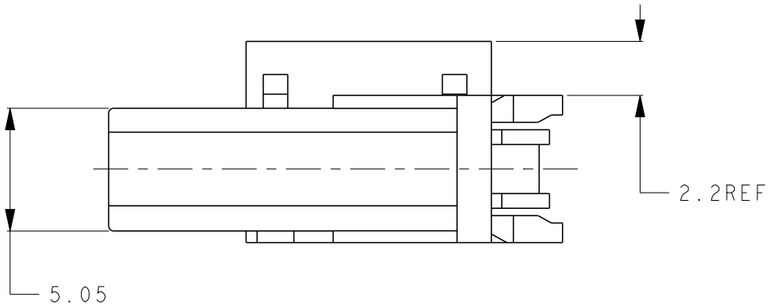

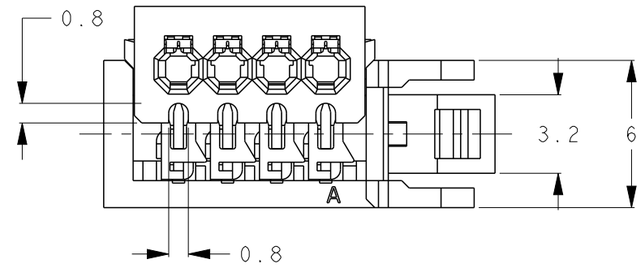

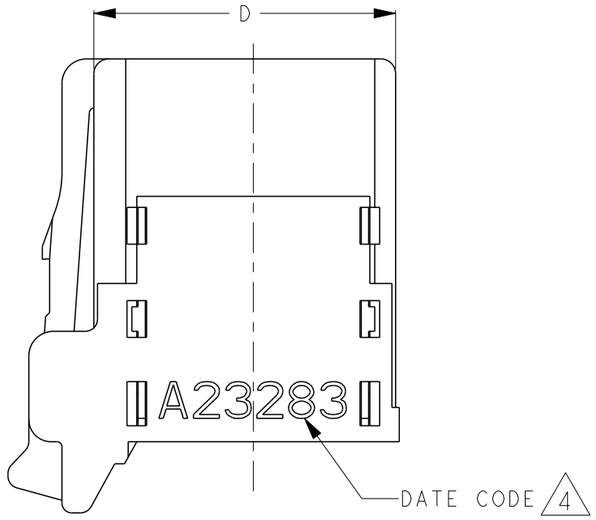

・取扱説明書(Instruction Sheet):411-78014

HOLD HSG COLOR	D	C	B	A	N	POS.	PART NUMBER
GREEN	20.35	17.2	14	24.1	7	8	4-1473562-8
	20.35	17.2	14	24.1	7	7	△3 4-1473562-7
	16.35	13.2	10	20.1	5	6	4-1473562-6
	16.35	13.2	10	20.1	5	5	△3 4-1473562-5
	12.35	9.2	6	16.1	3	4	4-1473562-4
	10.35	7.2	4	14.1	2	3	4-1473562-3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差
0 PLC ±-
1 PLC ±- ±0.2
2 PLC ±- ±3°
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 材料 △1

FINISH 仕上 △2

DWN	K.RIKU 26DEC02
CHK	D.MITSUGI 26DEC02
APVD	S.MANABE 26DEC02
PRODUCT SPEC 製品規格	108-5765
APPLICATION SPEC 取付適用規格	-
WEIGHT	-

TE Connectivity

NAME 名称: PLUG ASSY FOR e-CON - RITS CONN. -

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-1473562	-


CUSTOMER DRAWING

SCALE 尺度 3:1 | SHEET 2 OF 3 | REV D

© 2023TE Connectivity. All Rights Reserved.

REVISIONS 変更						
P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
		SEE SHEET 1 OF 3				

3-1473562-4 : AS SHOWN
3-1473562-4 : 本図

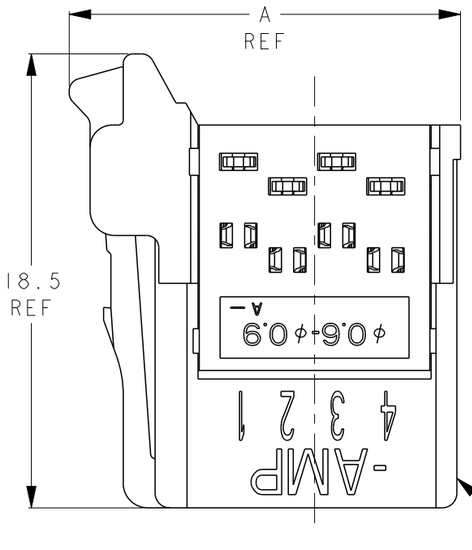

△1 : 材料 : PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒
HOLD HOUSING : ポリカーボネイト 94V-0 オレンジ色 : 3-
コンタクト : 銅合金

△2 : メッキ : 全面Ni下地 : 1.27μm以上
接点部 : 金めっき 0.2μm以上

△3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません

△4 : プロダクションラインによってデートコードが記載されているものがあります。
デートコードの内容 : 6桁
レーザーマーカーによる印字

A 23 28 3
- DAY OF A WEEK
- WEEK(01-52 OR 53)
- YEAR
- プロダクションライン識別


△1.MATERIAL:PLUG HOUSING :GLASS FILED THEMOPLASTIC,94V-0,BLACK
HOLD HOUSING :PC, 94V-0, ORANGE:3-
CONTACT :COPPER ALLOY


△2.FINISH:UNDERPLATE :Ni 1.27μm min
CONTACT AREA :Au 0.2μm min


△3.X--5(5POS) AND X--7(7POS)DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.


△4.SOME PRODUCTION LINES HAVE DATE CODES LISTED.
DATE CODE : 6 DIGITS
SHALL BE MARKED BY LASER MARKER.

A 23 28 3
- PRODUCTION LINE NUMBER
- DAY OF A WEEK
- WEEK(01-52 OR 53)
- YEAR

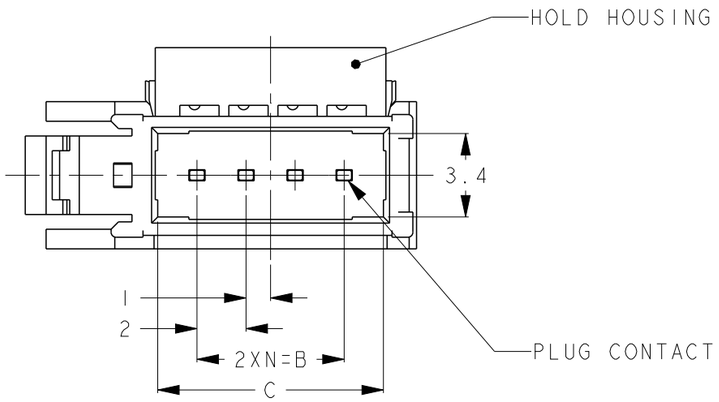

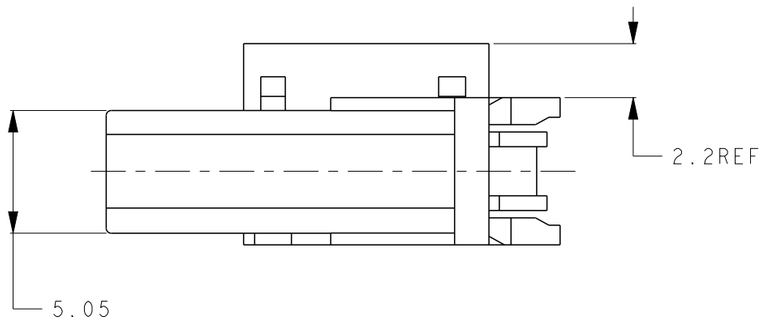

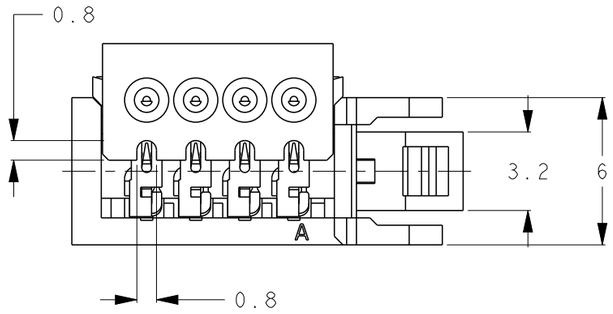

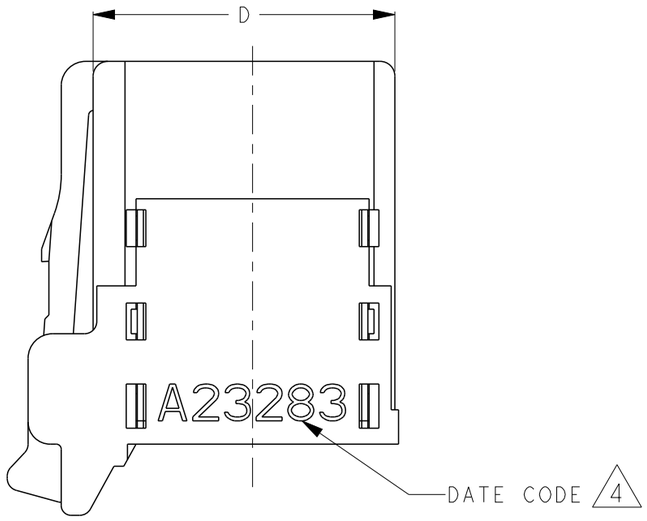

・取扱説明書(Instruction Sheet):411-78014

ORANGE	20.35	17.2	14	24.1	7	8	3-1473562-8
	20.35	17.2	14	24.1	7	7	△3 3-1473562-7
	16.35	13.2	10	20.1	5	6	3-1473562-6
	16.35	13.2	10	20.1	5	5	△3 3-1473562-5
	12.35	9.2	6	16.1	3	4	3-1473562-4
	10.35	7.2	4	14.1	2	3	3-1473562-3
HOLD HSG COLOR	D	C	B	A	N	POS.	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差
0 PLC ± ±0.2
1 PLC ± ±3°
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL 材料 △1

FINISH 仕上 △2

DWN S.YOKOZEKI 21JAN'03
CHK D.MITSUGI 30JAN'03
APVD S.MANABE 30JAN'03
PRODUCT SPEC 製品規格 108-5765
APPLICATION SPEC 取付適用規格 -
WEIGHT -

TE Connectivity

NAME 名称 PLUG ASSY FOR e-CON - RITS CONN. -

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-1473562	-

CUSTOMER DRAWING | SCALE 尺度 3:1 | SHEET 3 OF 3 | REV D