


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | AH2 | REVISED PER ECO-17-013369 | 14MAR2018 | J.Z | D.Z |

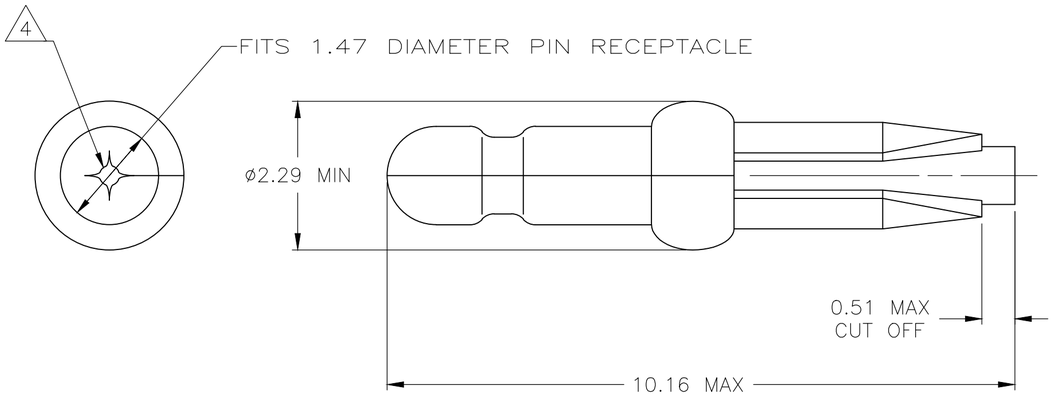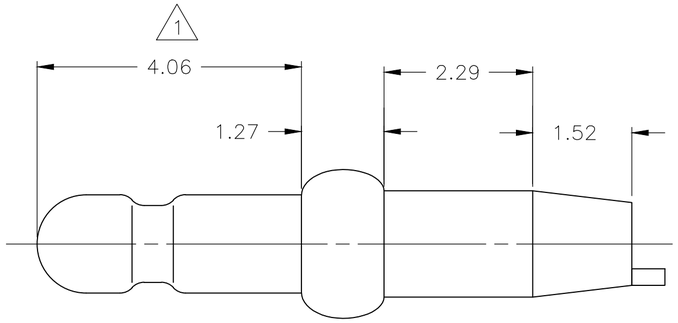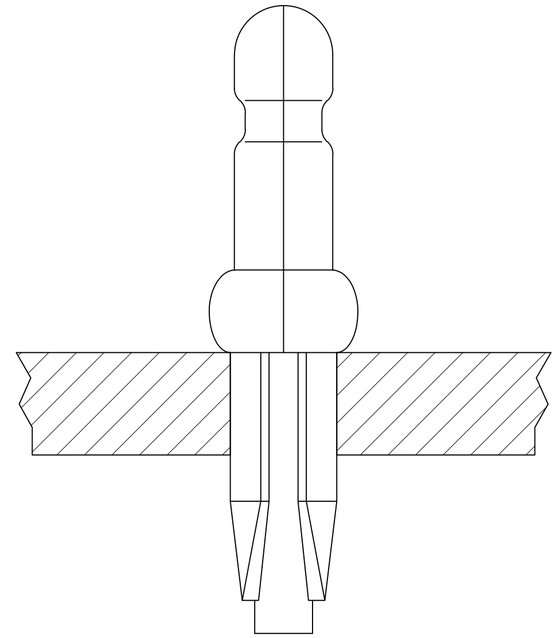

1 0.00076 MIN GOLD PLATING IN THIS AREA WITH 0.00381 MIN MATTE TIN LEAD ON THE REMAINDER, BOTH OVER 0.00127 MIN NICKEL UNDERPLATE.

2 FITS 1.47 – 1.57 DIAMETER HOLE IN A 1.57 OR 2.36 PRINTED CIRCUIT BOARD.

3 PARTS TO COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-3.

4 0.05 – 0.25 DIAMETER OPENING REQUIRED IN TIP OF PIN.

5 APPLICATOR FEED: 8.00 – 8.26

6 0.00076 MIN GOLD PLATING IN THIS AREA WITH 0.00381 MIN TIN ON THE REMAINDER, BOTH OVER 0.00127 MIN NICKEL UNDERPLATE.

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 0.13 | .005 | 1.52 | .060 | 8.00 | .315 | – | – |
| 0.05 | .002 | 1.47 | .058 | 4.06 | .160 | – | – |
| 0.00381 | .000150 | 1.27 | .050 | 2.36 | .093 | – | – |
| 0.00127 | .000050 | 0.51 | .020 | 2.29 | .090 | 10.16 | .400 |
| 0.00076 | .000030 | 0.25 | .010 | 1.57 | .062 | 8.26 | .325 |
| MM | IN | MM | IN | MM | IN | MM | IN |

CONVERSION TABLE

METRIC

| | | |
|---|---|---|
| | 6 | 3-60874-2 |
| OBSOLETE | 1 | ~~60874-2~~ |
| | PRE TIN | 60874-1 |
| | FINISH | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: 0.25 PH BRZ

FINISH: SEE TABLE

DWN T. BECK 8-20-97
CHK R. SWING 8-20-97
APVD A. BEDDICK 9-10-97
PRODUCT SPEC 108-1025
APPLICATION SPEC 114-1008
WEIGHT 0.000000

TE Connectivity Ltd.

NAME: PIN, .058 DIAMETER, PHOSPHER BRONZE, PRESS FIT, LOOSE PIECE, P.C. CONTACT

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-60874 | – |

CUSTOMER DRAWING | SCALE 15:1 | SHEET 1 OF 1 | REV AH2

60874

1471-9 (1/15)