


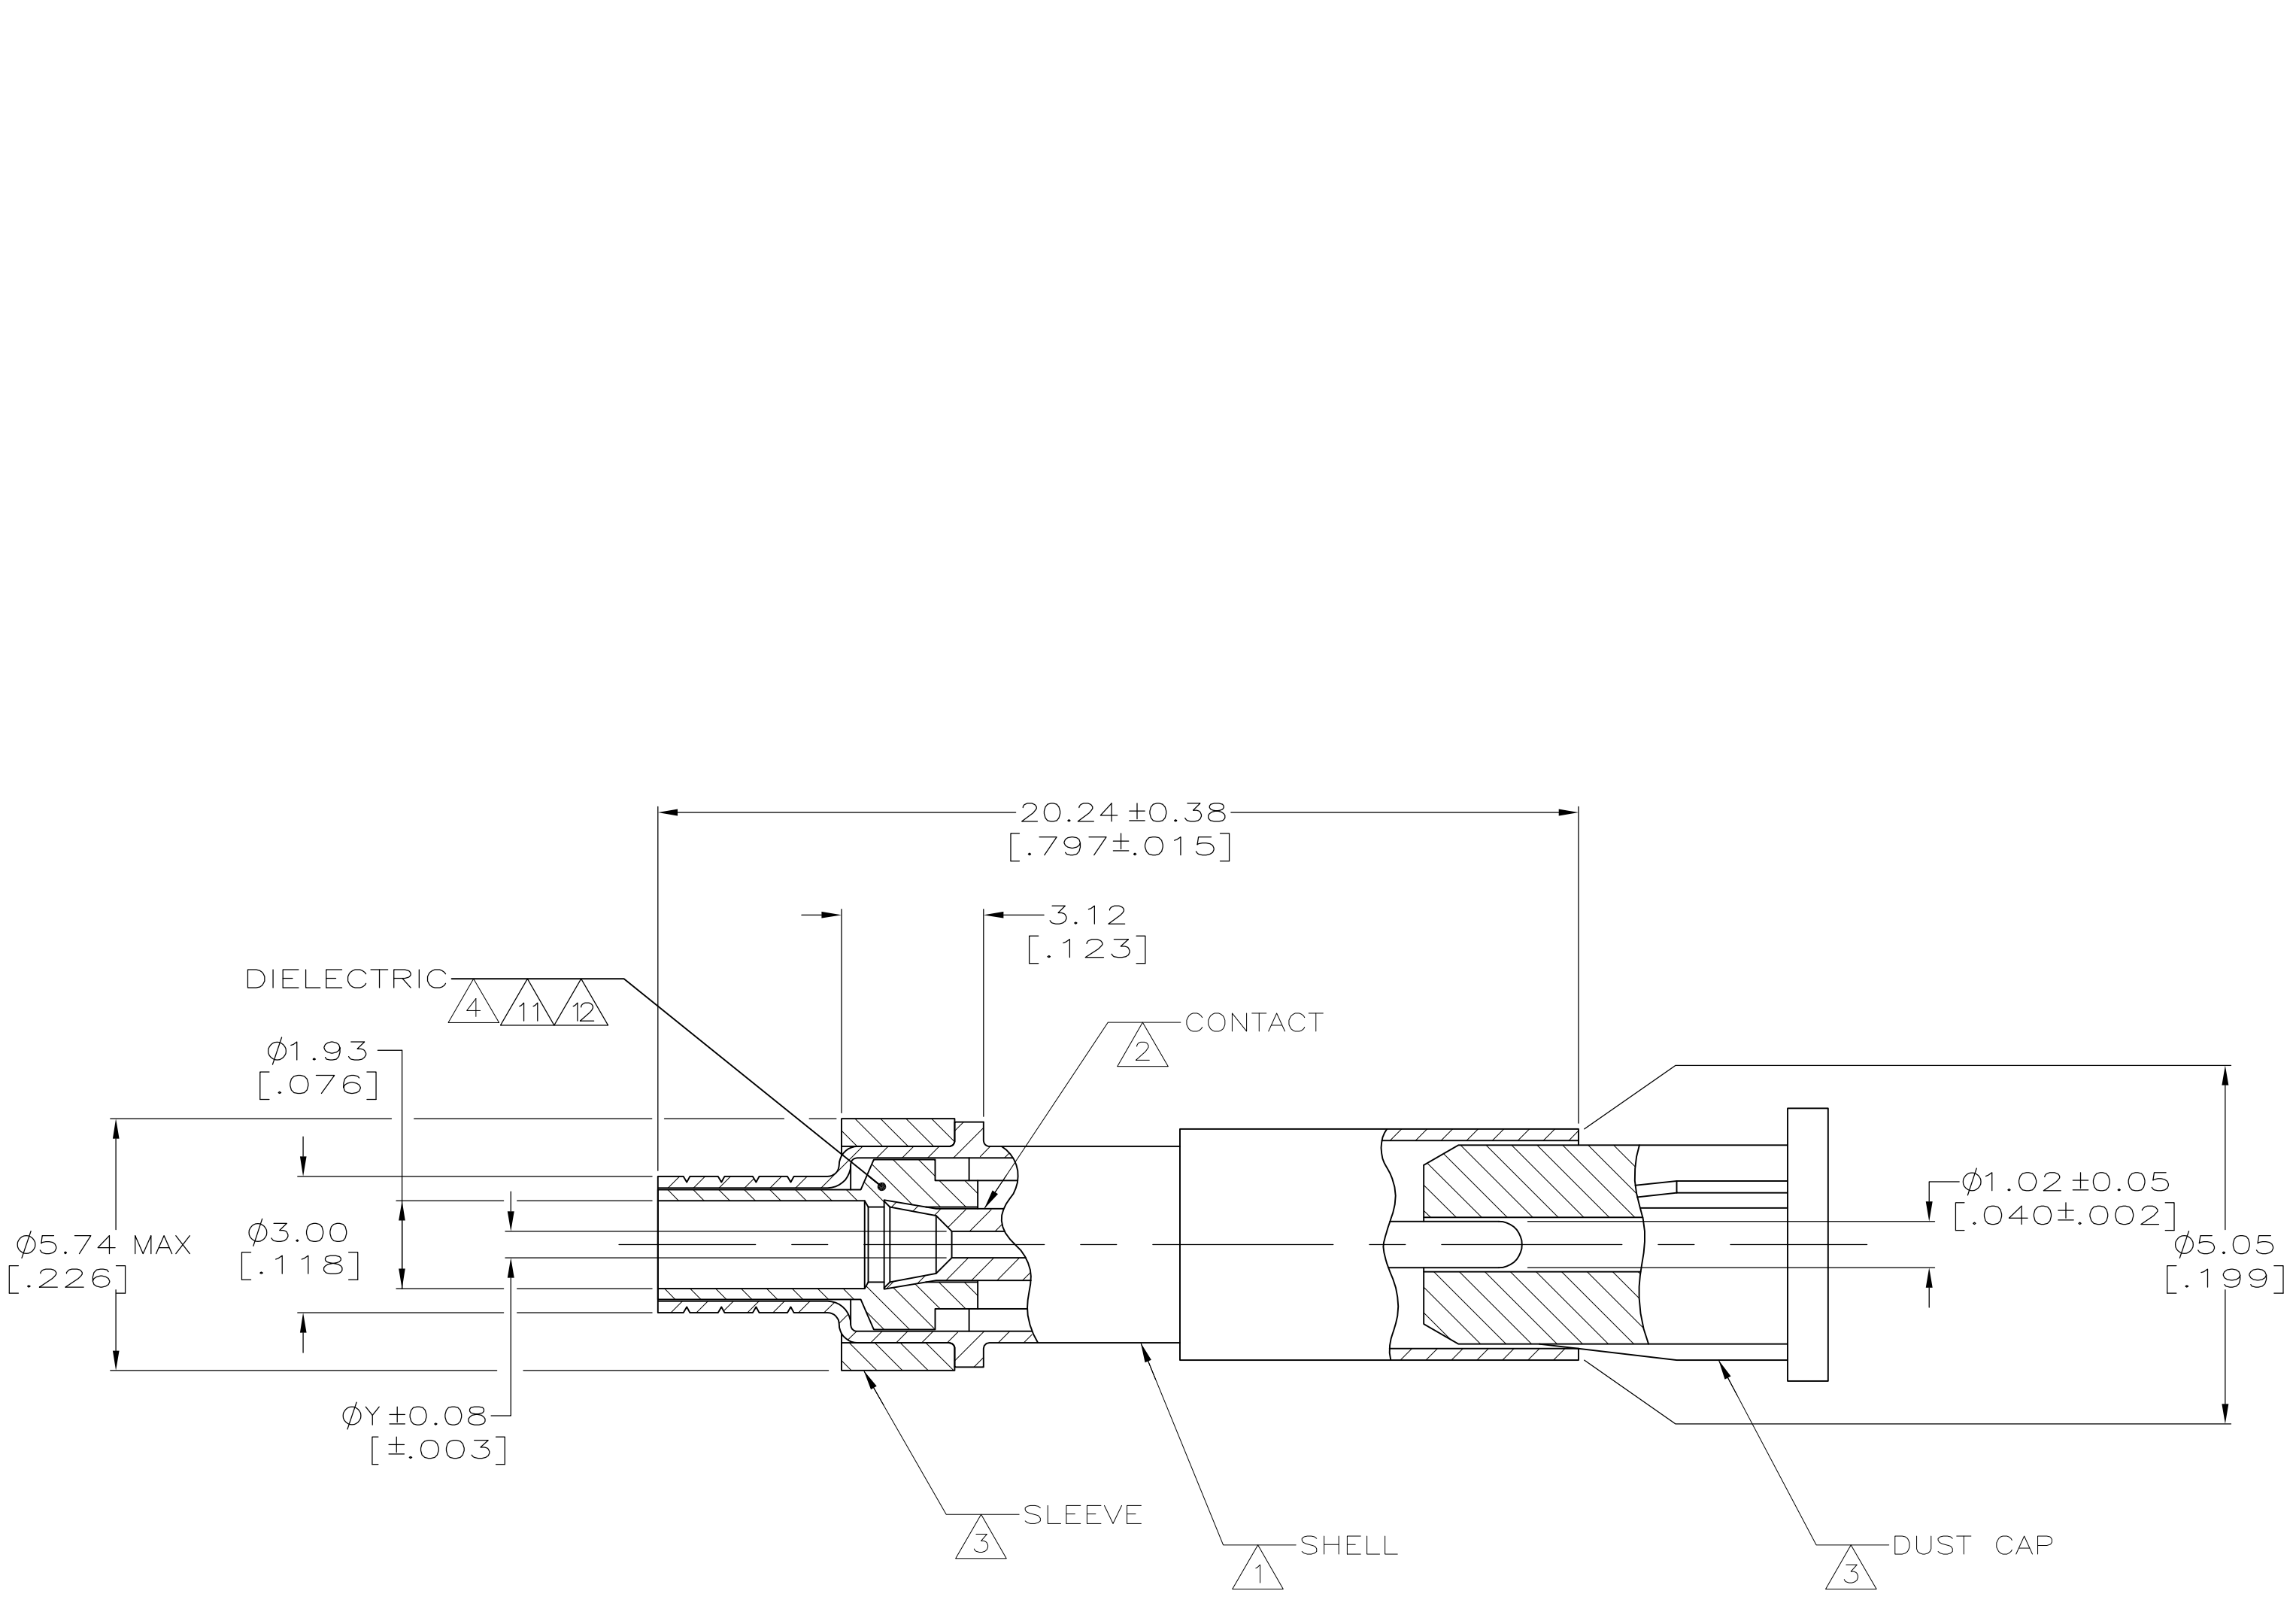

- 1 BRASS PER QQ-B-626.
- 2 BERYLLIUM COPPER PER ASTM-B-196
- 3 NYLON PER ASTM-D-4066, BLACK
- 4 POLYMETHYLPENTENE GENERAL PURPOSE, NATURAL
- 5 0.00076[.000030] MINIMUM GOLD PER MIL-C-45204.
- 6 0.00254[.000100] MINIMUM GOLD PER MIL-C-45204.
- 7 SHIELDED CABLE #26=NAS-702 CLASS A & C, AND MIL-W-16878 TYPES E & EE, SHIELDED CABLE #24=NAS-702 CLASS A & C, AND MIL-W-16878 TYPES E & EE, SHIELDED CABLE #22=NAS-702 CLASS C, AND MIL-W-16878 TYPE E, AND MIL-C-7078A TYPE I NUMBER 1 DIELECTRIC .068 O.D.
- 8 RG-174/U, RG-179A/U, RG-187/U, AND 21-598.
- 9 SHIELDED CABLE #26=NAS-702 CLASS A, AND MIL-C-7078A TYPE II.
- 10 SEE IS 408-1770
- 11 NYLON PER ASTM-D-4066, NATURAL
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	5	5	.034 OUNCES	—	—	0.81[.032]	—	—	—	1-201144-8
	—	—	1.65 GRAMS MAX	8	45368-2	—	9-328666-3	201142-2	201144-1	1-201144-1
12 OBSOLETE	6	6	.034 OUNCES	—	—	0.81[.032]	—	—	—	201144-7
OBSOLETE	6	6	.034 OUNCES	—	—	0.58[.023]	—	—	—	201144-6
	5	5	.034 OUNCES	—	—	0.81[.032]	—	—	—	201144-5
	5	5	.034 OUNCES	—	—	1.07[.042]	—	—	—	201144-3
	5	5	.034 OUNCES	—	—	0.58[.023]	—	—	—	201144-1
CONTACT PLATING	SHELL PLATING	WEIGHT	CABLE OR WIRE SIZE	CRIMP TOOL	Y	3 FERRULE QTY=1	2 SPRING RETENTION QTY=1	1 SOCKET ASSY QTY=1	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. LIPPERT 18 DEC 89	TE Connectivity	
			CHK M. SNEED 22 FEB 90		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		AP'D B. ADAMS 22 FEB 90	NAME
		0 PLC	± —	PRODUCT SPEC 108-12021	
		1 PLC	± —		
		2 PLC	± —		
		3 PLC	± 0.20[.008]		
		4 PLC	± —	APPLICATION SPEC	
		ANGLES	± —		
MATERIAL —		FINISH —		SIZE	CAGE CODE
				WEIGHT 0	DRAWING NO
				A1 00779	201144
				CUSTOMER DRAWING	
				SCALE 8:1	SHEET 1 OF 1
				REV AV3	