


© 2020TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER EO P19555	7-11-07		RDR
	D	REVISED PER PCN E-20-009639	10JUL2020	DM	IG
	D1	REVISED PER PCN-25-234736	06FEB2025	GB	DM

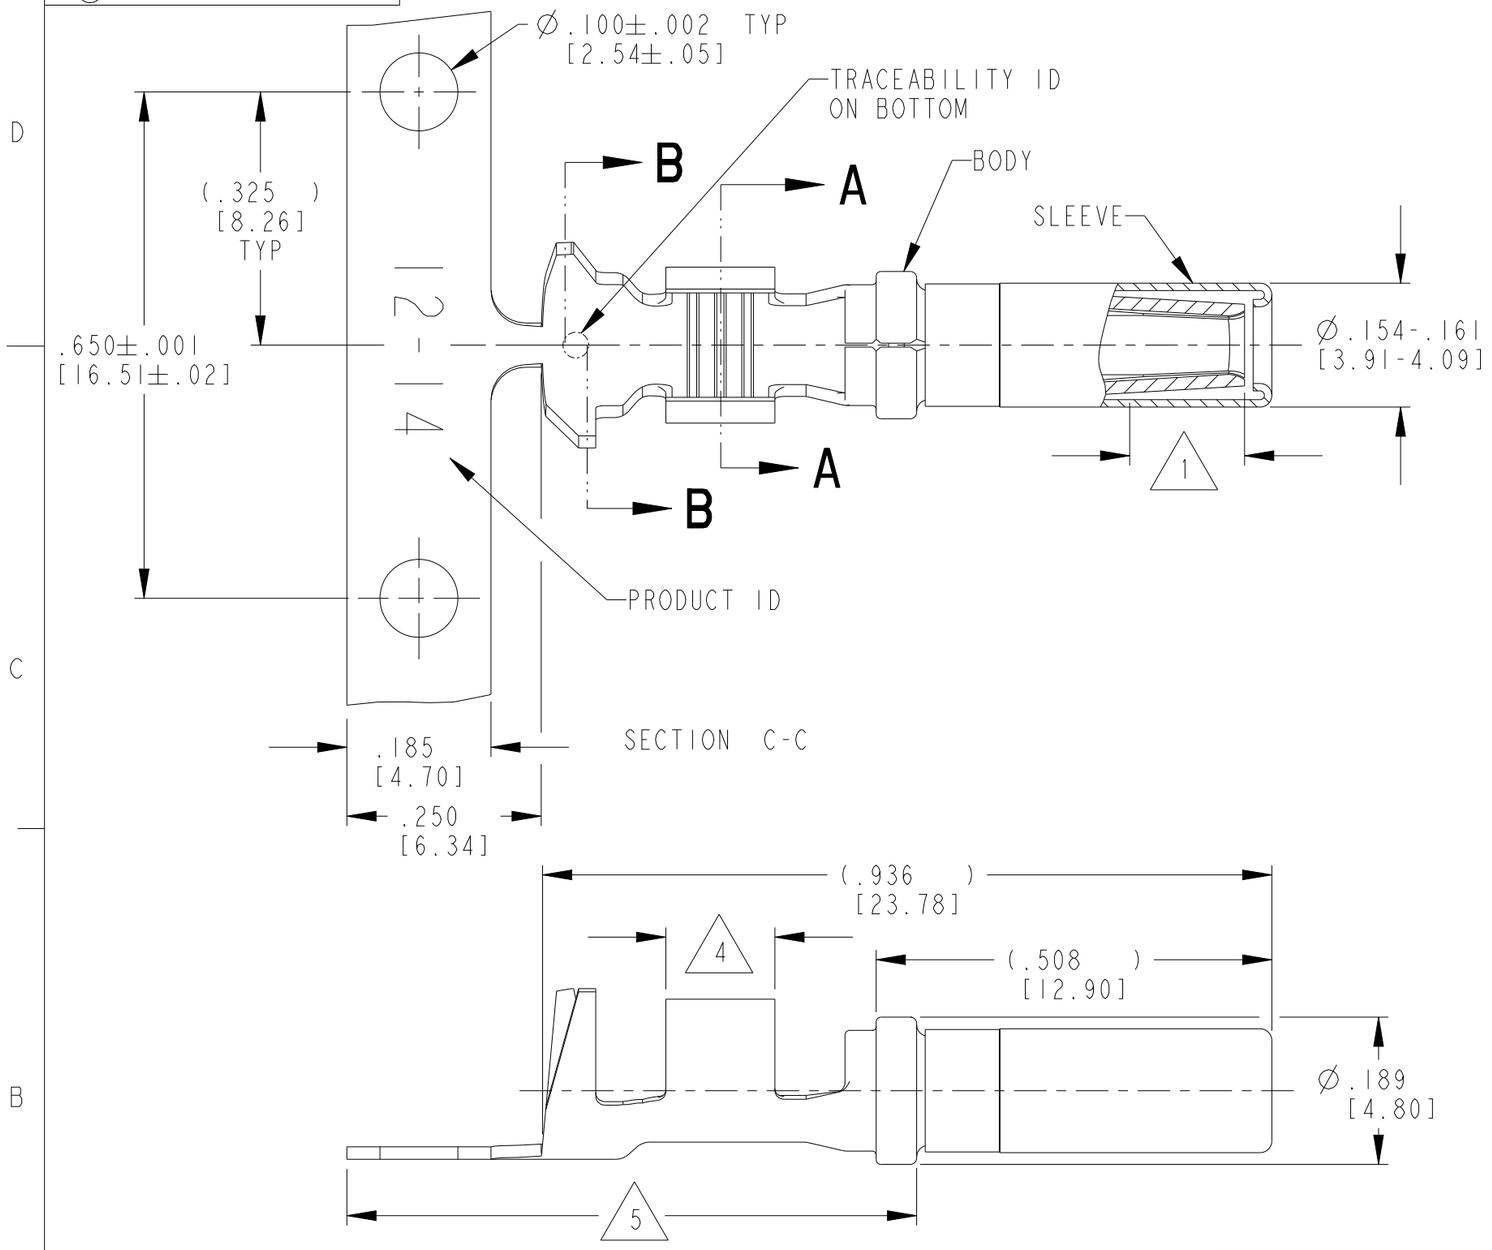

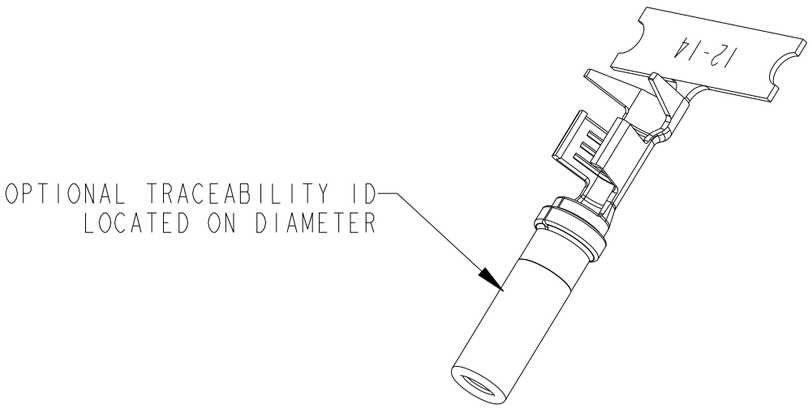



SECTION A-A
CONDUCTOR WINGS

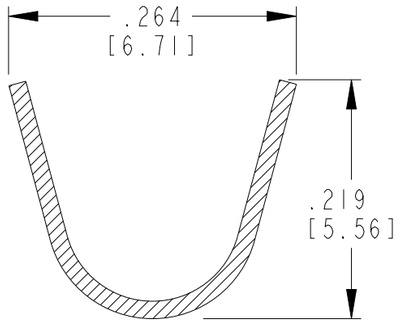

SECTION B-B
INSULATION WINGS

5 TIN PLATING MAY BE IN THIS REGION.

4 TIN PLATED REGION.

3 MATERIAL: .016 [0.41] THICK COPPER ALLOY.

2. WIRE RANGE: 14 AWG TO 12 AWG [2.0-4.0mm²]
INSULATION RANGE: Ø.113-.176 [2.87-4.47]

1 GOLD PLATED REGION.

NOTES: UNLESS OTHERWISE SPECIFIED

	TE INTERNAL PN	DEUTSCH PN	REV	PLATING
1	1062-12-0144	1062-12-0144	G	Selective Au, Ni/Cu overall, Sn/Ni/Cu Wire Barrel
	1062-12-0166	1062-12-0166	G	Selective Ni, Ni/Cu overall, Sn/Ni/Cu Wire Barrel

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±

MATERIAL 3

FINISH SEE TABLE

DWN D.MEYER 14NOV2000
CHK B.BYFORD 11JUL2007
APVD R.REED 11JUL2007
PRODUCT SPEC 108-151000
APPLICATION SPEC 114-151002
WEIGHT 1.0 g

TE Connectivity

NAME SOCKET, STAMPED CONTACT
SIZE 12
12-14 AWG, .113-.176 INS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-1062-12-01XX	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D1