

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL INTERNATIONAL RIGHTS RESERVED.





© COPYRIGHT

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C6	REVISED PER ECR-19-017851	26NOV2019	SM	DZ
	D	REVISED PER ECR-19-017623	17DEC2020	MG	DZ

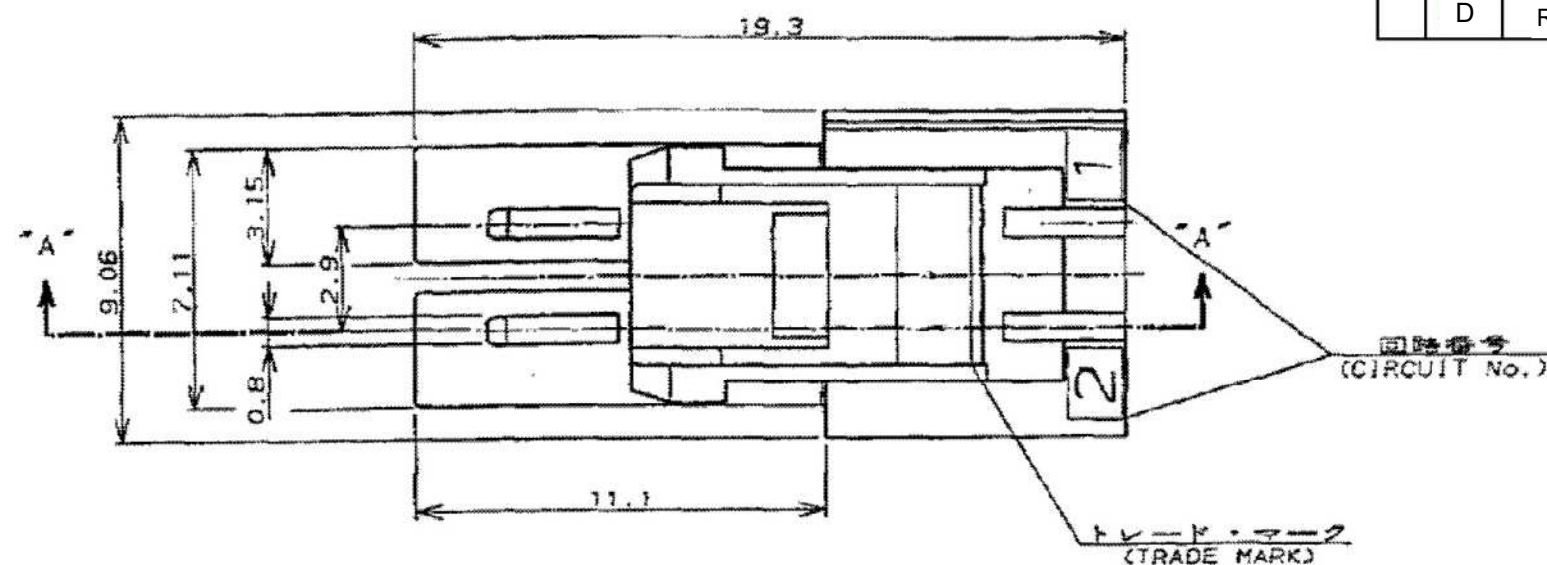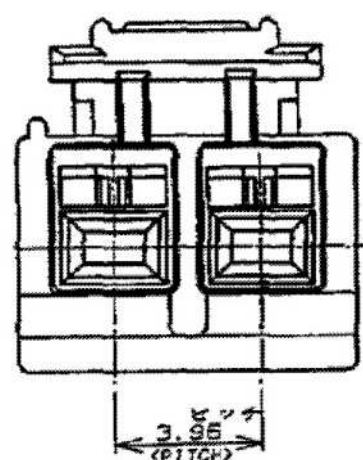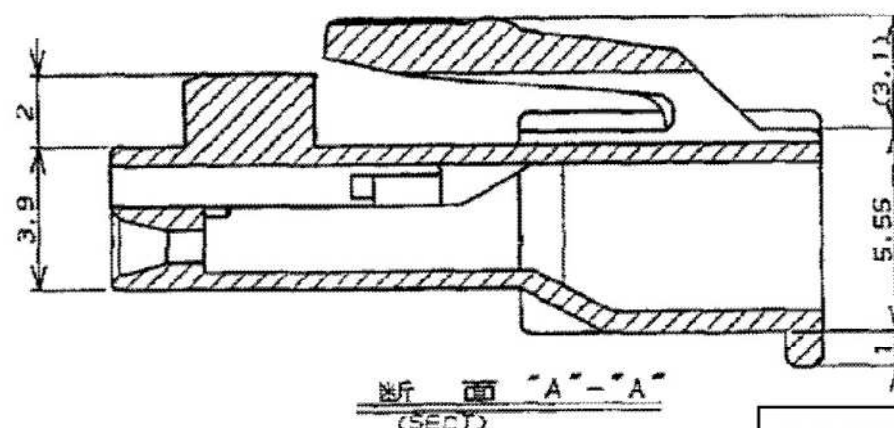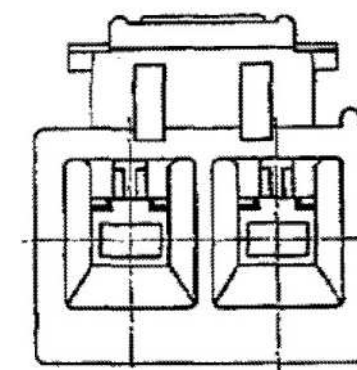

1. APPLICABLE CONTACT PART NUMBER;

REC CONTACT: 175152-□ (#20-#16AWG)

175151-□ (#26-#22AWG)

2. TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX

3. MATERIAL: PA66, UL94 V-0, GWIT 775°C

1-176282-5	130°C MAX	△3	GREEN 緑	2	1-176271-5
1-176282-1	130°C MAX	△3	NATURAL 自然色		1-176271-1△2
176282-□ 176292-□	105°C MAX	PA66	BLACK 黒		176271-9
			BLUE 青		176271-6
			YELLOW 黄		176271-4
			RED 赤		176271-2
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番
	MATERIAL 材料				

1. 適用端子型番;

リセコンタクト: 175152-□ (#20-#16AWG)

175151-□ (#26-#22AWG)

2. 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

≤ 10 ± 0.2
 $10 < \leq 30$ ± 0.25
 $30 <$ ± 0.3

ANGLES $\pm 3^\circ$
 FINISH

MATERIAL

SEE TABLE

DWN M.SHINDO 08NOV1989

CHK Y.FUJITA 08NOV1989

APVD Y.FUJITA 08NOV1989

PRODUCT SPEC

108-5302

APPLICATION SPEC

114-5142

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME
 AMP UNIVERSAL POWER CONN.
 3.96mm PITCH PLUG HOUSING 2 Pos. (SGL ROW)
 AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング

SIZE CAGE CODE DRAWING NO RESTRICTED TO
 A3 00779 C-176271

SCALE NTS SHEET 1 OF 1 REV D