

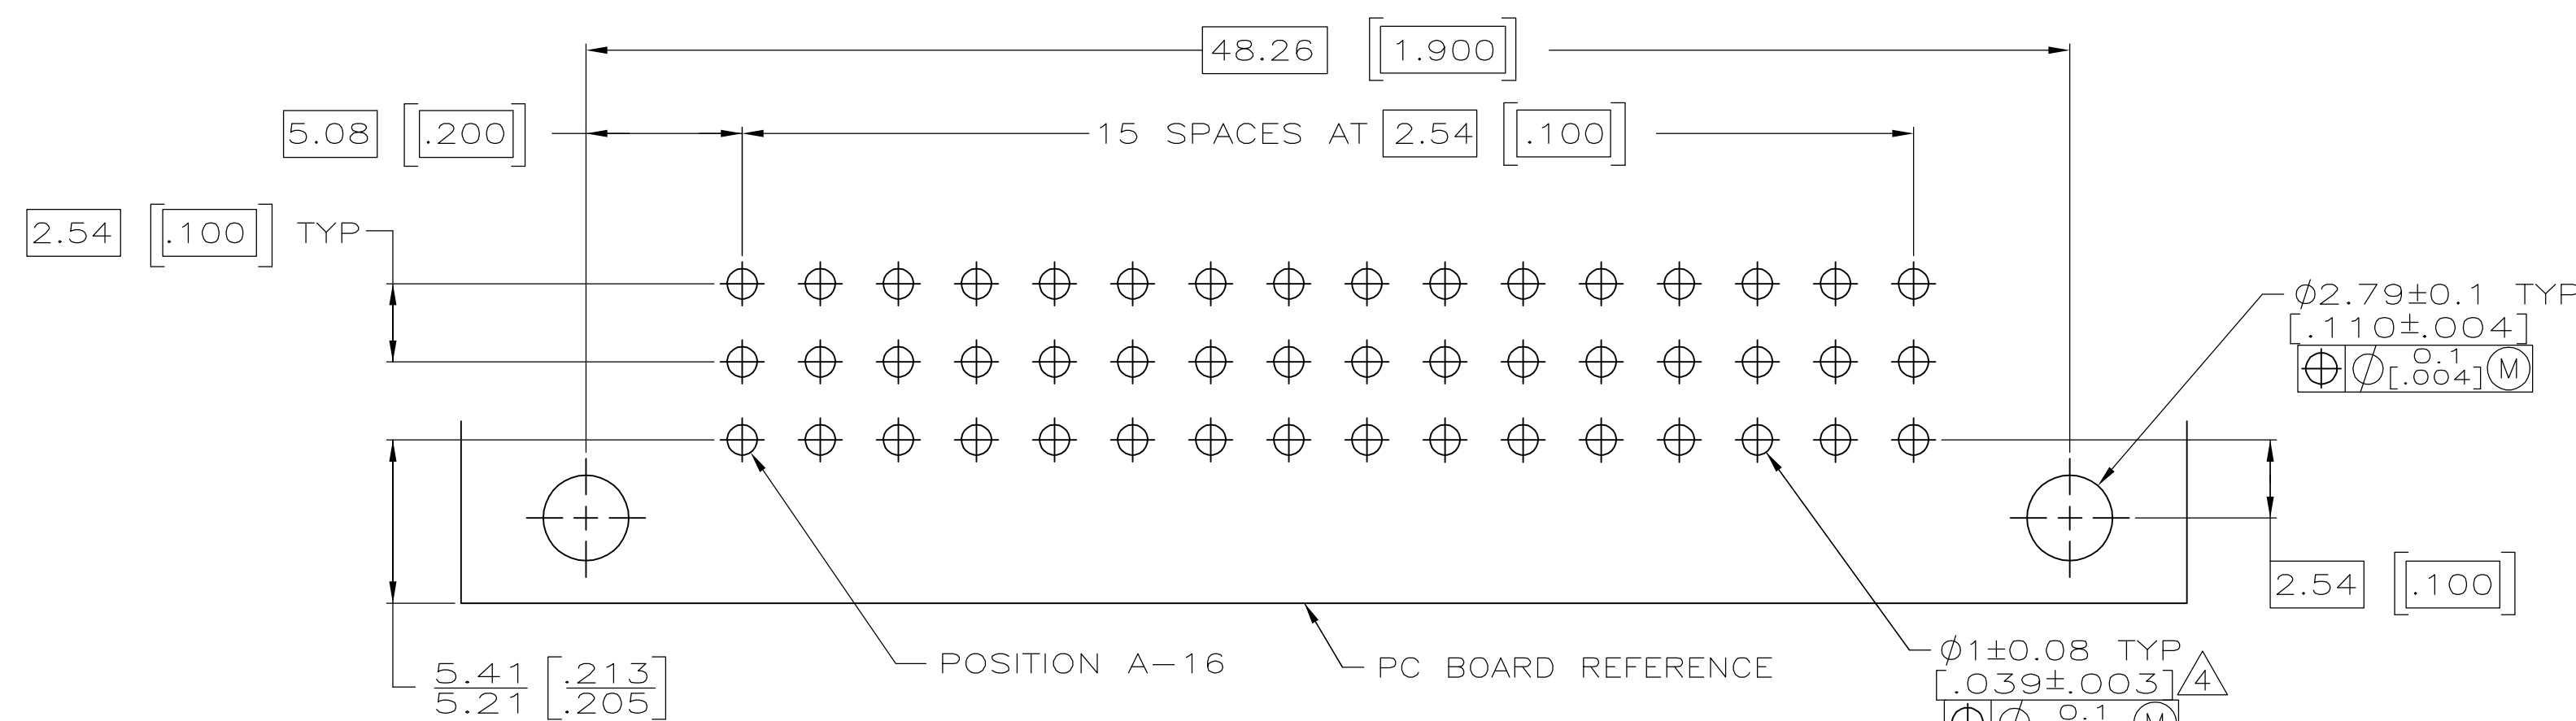
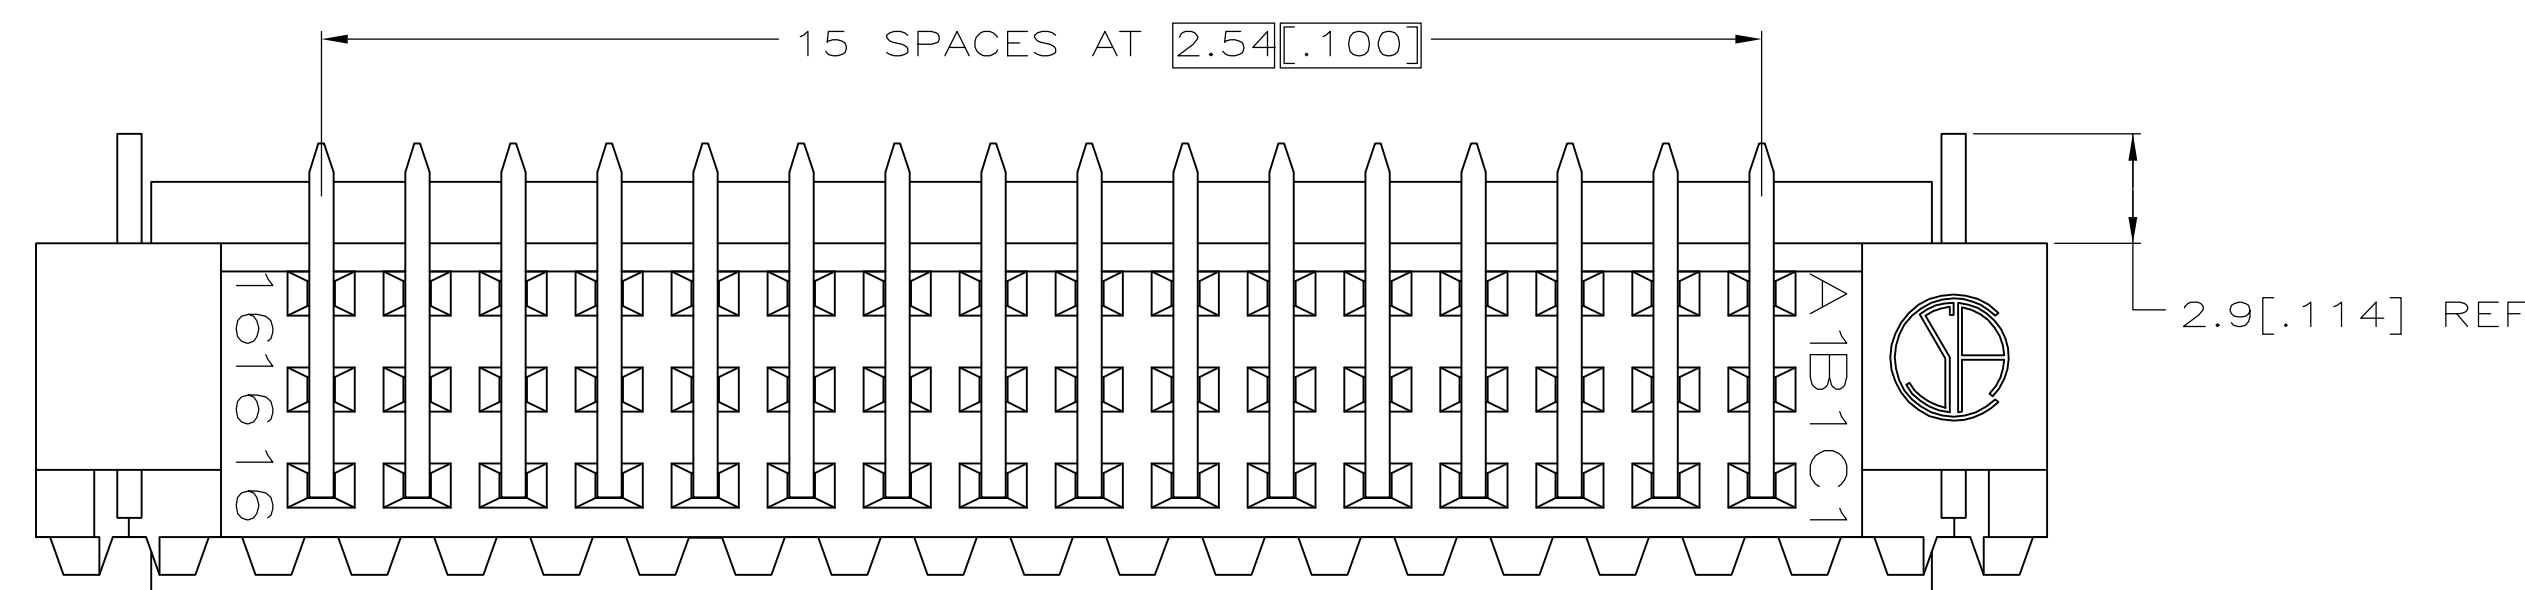
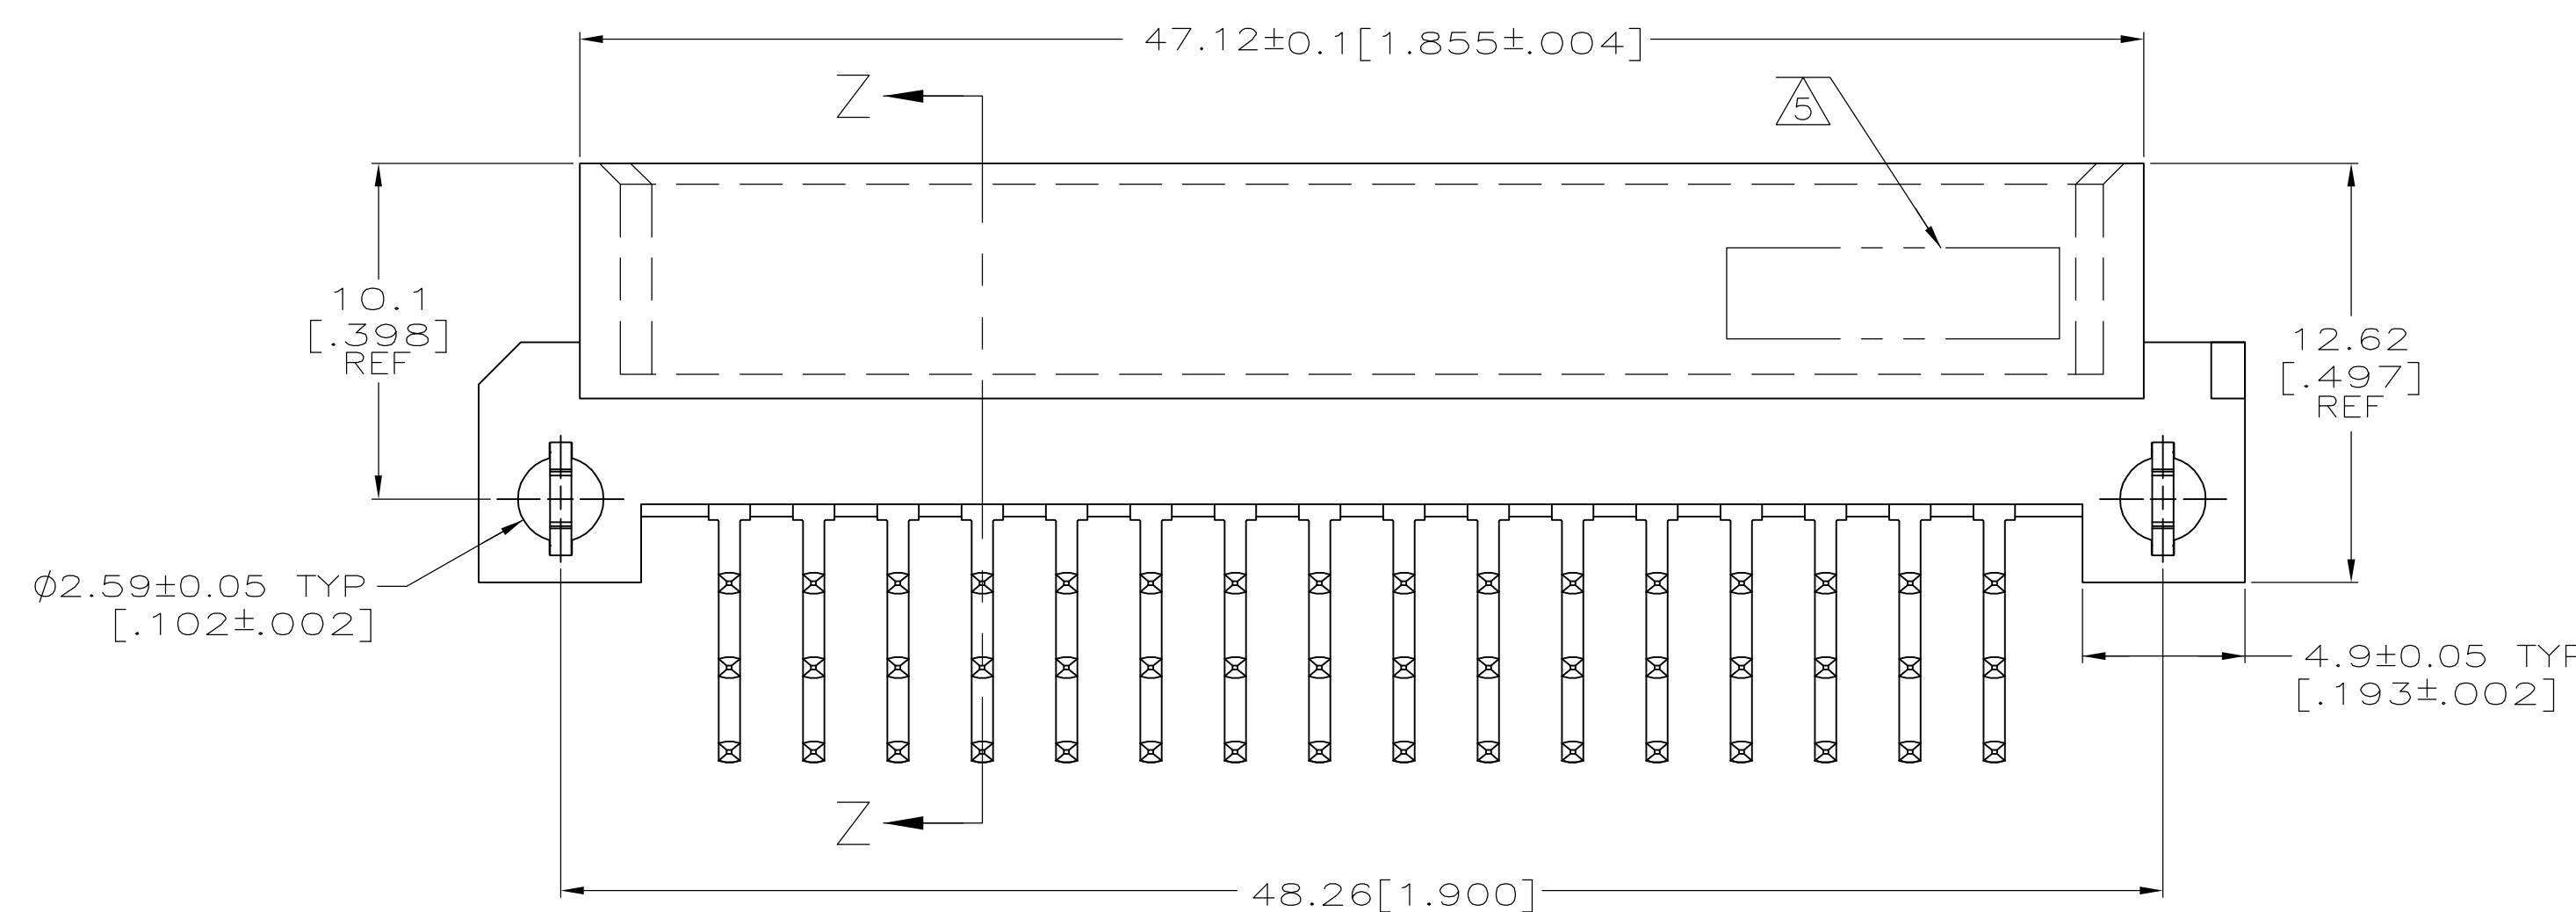


LOC	DIST	REVISIONS					
AD	25	P	LTR	DESCRIPTION	DATE	DWN	APVD
			01	REVISED PER ECO-06-013275	06JUN06	JDP	AMS

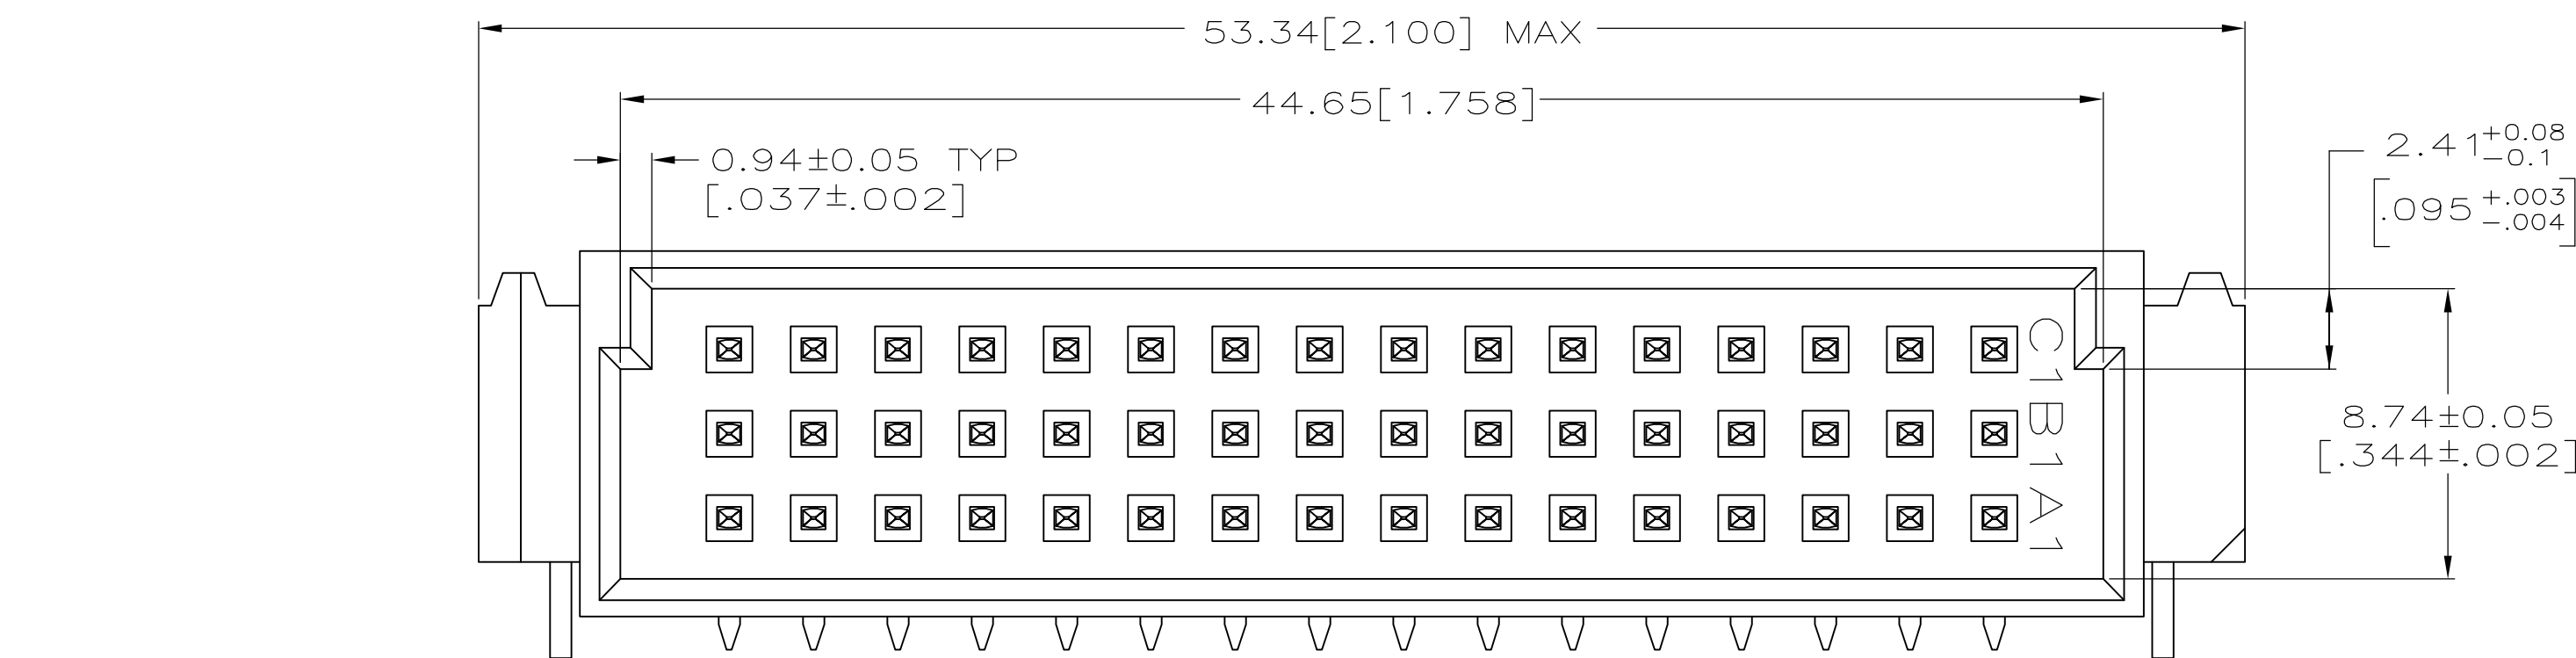

PC BOARD LAYOUT
RECOMMENDED PC BOARD THICKNESS 1.57[.062]

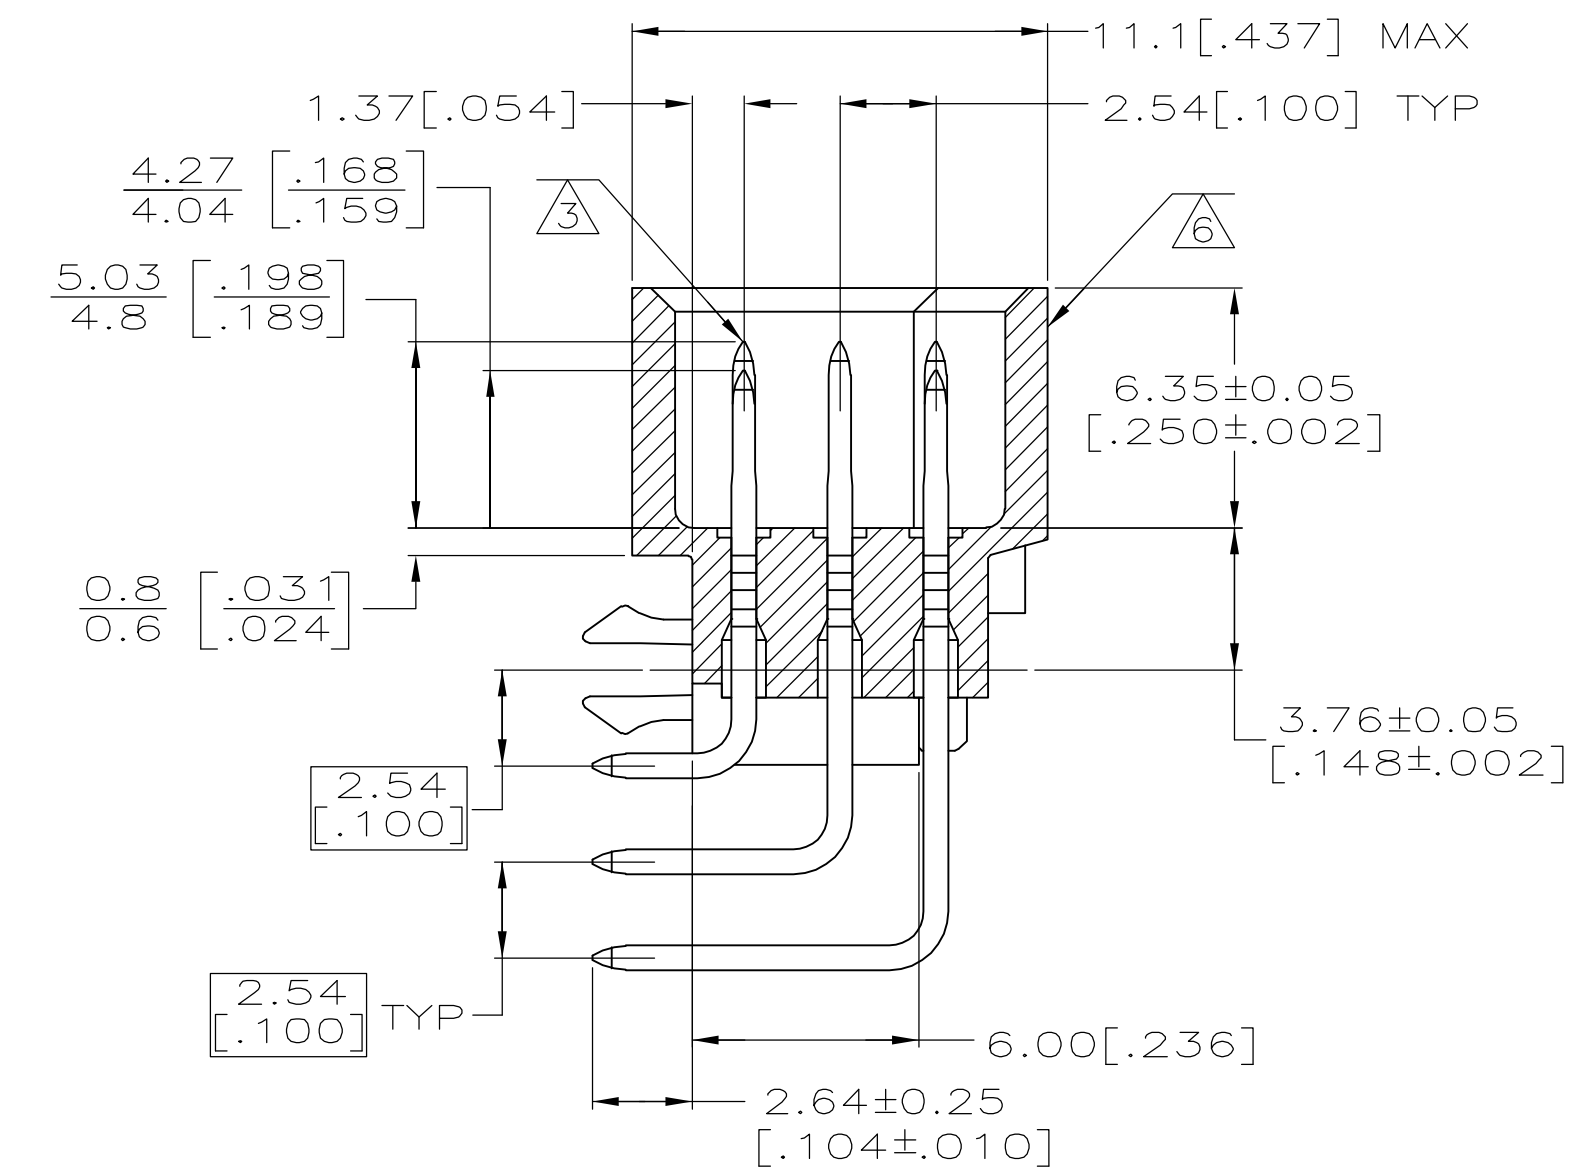

SECTION Z-Z

NONE	1-16	C	16	5536751-7
1,16	2-15	B	16	
NONE	1-16	A	16	
12,15	1-11,13,14,16	C	16	5536751-4
2,10,16	1,3-9,11-15	B	16	
1,5,13	2-4,6-12,14-16	A	16	
POSITIONS LOADED WITH 4.93[.194] CONTACTS	POSITIONS LOADED WITH 4.16[.164] CONTACTS	ROWS	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE	OSMAYDS		tyco Electronics		Tyco Electronics Corporation		
		GWR A. SHARPE	OSMAYDS				Harrisburg, PA 17105-3608		
DIMENSIONS: mm [INCHES]		APVD A. SHARPE	OSMAYDS		NAME		ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, 2.64[.104] SOLDER POST, WITH MFLB CONTACTS AND BOARD-LOCKS		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE		PAGE CODE		DRAWING NO	
0 PLC ± — 1 PLC ± .013 [.005] 2 PLC ± — 3 PLC ANGLES ± — 4 PLC ± —		APPLICATION SPEC		RESTRICTED TO					
MATERIAL	FINISH	WEIGHT		A1 00779 C=5536751		SCALE		SHEET	
1/2	3	—		—		5:1		1 OF 1	
CUSTOMER DRAWING								REV 0	