
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


| LOC | DIST |
|---|---|
| GP | 00 |


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | B | REVISED PER ECO-11-019758 | 13FEB2012 | CJV | CWR |


1. PREFIX AND SUFFIX NUMBERS MUST MATCH THOSE ON PLUG ASSEMBLY FOR PARTS TO MATE.
2. POLYESTER, FLAME RETARDANT, UL 94V-0 RATED, GLASS FILLED, BLACK.
3. 0.76µm [.000030] MIN BRIGHT TIN OVER 1.27µm [.000050] MIN NICKEL.
4. 1.27µm [.000050] MIN GOLD ON MATING SURFACE FOR A LENGTH OF 2.54 [.100] MIN, 3.81µm [.000150] MIN MATTE TIN ON OPPOSITE END FOR A LENGTH OF 3.81 [.150] MIN, BOTH OVER 1.27µm [.000050] MIN NICKEL ON ENTIRE CONTACT.
5. DIMENSION INDICATES CONTACT MATING AREA.
6. PLATING MEASUREMENT POINT.

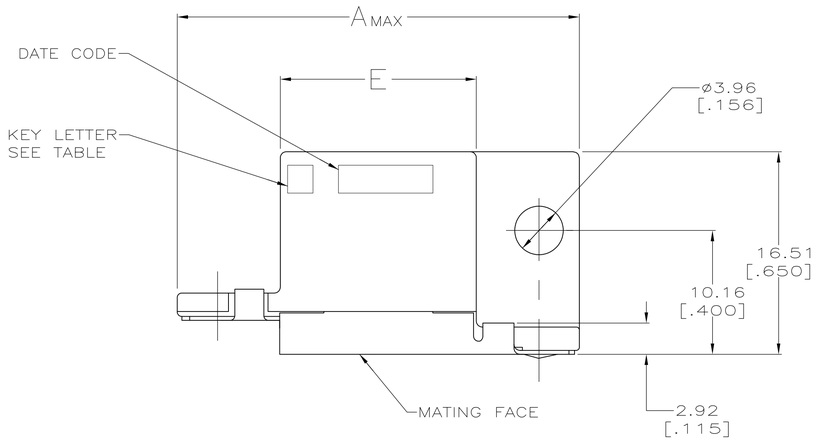

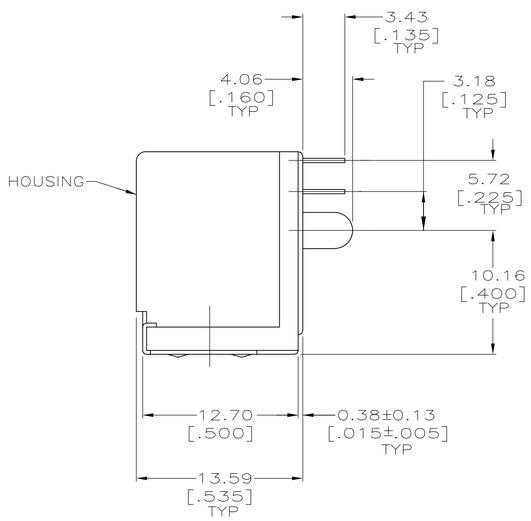
SECTION J-J

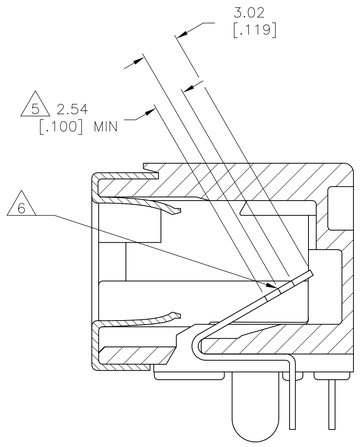


| | E | D | C | B | A | NO OF POSN | KEY I.D. LETTER | PART NO |
|---|---|---|---|---|---|---|---|---|
| OBSOLETE | 16.00 [.630] | 11.43 [.450] | 21.46 [.845] | 26.24 [1.033] | 33.02 [1.300] | 4 | F | 6-1761186-1 |
| | 31.24 [1.230] | 26.44 [1.041] | 36.70 [1.445] | 41.48 [1.633] | 48.26 [1.900] | 16 | E | 5-1761186-6 |
| | 21.08 [.830] | 16.51 [.650] | 26.54 [1.045] | 31.32 [1.233] | 38.10 [1.500] | 8 | E | 5-1761186-3 |
| OBSOLETE | 18.54 [.730] | 13.97 [.550] | 24.00 [.945] | 28.78 [1.133] | 35.56 [1.400] | 6 | E | 5-1761186-2 |
| | 16.00 [.630] | 11.43 [.450] | 21.46 [.845] | 26.24 [1.033] | 33.02 [1.300] | 4 | E | 5-1761186-1 |
| OBSOLETE | 18.54 [.730] | 13.97 [.550] | 24.00 [.945] | 28.78 [1.133] | 35.56 [1.400] | 6 | C | 3-1761186-2 |
| OBSOLETE | 16.00 [.630] | 11.43 [.450] | 21.46 [.845] | 26.24 [1.033] | 33.02 [1.300] | 4 | C | 3-1761186-1 |
| OBSOLETE | 21.08 [.830] | 16.51 [.650] | 26.54 [1.045] | 31.32 [1.233] | 38.10 [1.500] | 8 | B | 2-1761186-3 |
| OBSOLETE | 16.00 [.630] | 11.43 [.450] | 21.46 [.845] | 26.24 [1.033] | 33.02 [1.300] | 4 | B | 2-1761186-1 |
| OBSOLETE | 31.24 [1.230] | 26.44 [1.041] | 36.70 [1.445] | 41.48 [1.633] | 48.26 [1.900] | 16 | A | 1-1761186-6 |
| OBSOLETE | 18.54 [.730] | 13.97 [.550] | 24.00 [.945] | 28.78 [1.133] | 35.56 [1.400] | 6 | A | 1-1761186-2 |
| | 16.00 [.630] | 11.43 [.450] | 21.46 [.845] | 26.24 [1.033] | 33.02 [1.300] | 4 | A | 1-1761186-1 |

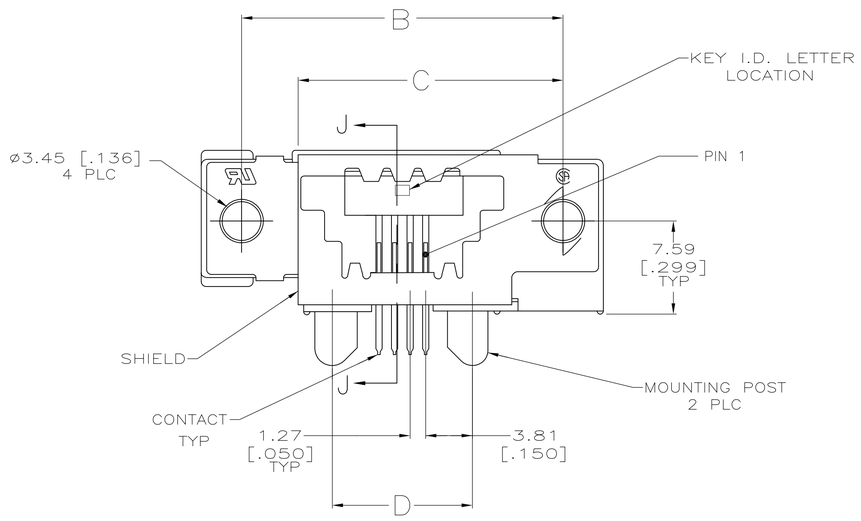THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.38 [.015]
4 PLC ± -
ANGLES ± -

MATERIAL 2

FINISH 3,4

DWN B. MCMASTER 26APR04
CHK C. ROHDE 26APR04
APVD M. WALMSLEY 26APR04

TE Connectivity

NAME RECEPTACLE ASSEMBLY, SIDE ENTRY WITH OFFSET, SDL

PRODUCT SPEC 108-2047
APPLICATION SPEC 114-2081
WEIGHT -

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-1761186 | - |

CUSTOMER DRAWING

| SCALE | SHEET | REV |
|---|---|---|
| 4:1 | 1 OF 1 | B |