

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AJ	17

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-11-005030	11MAR11	RK	HMR

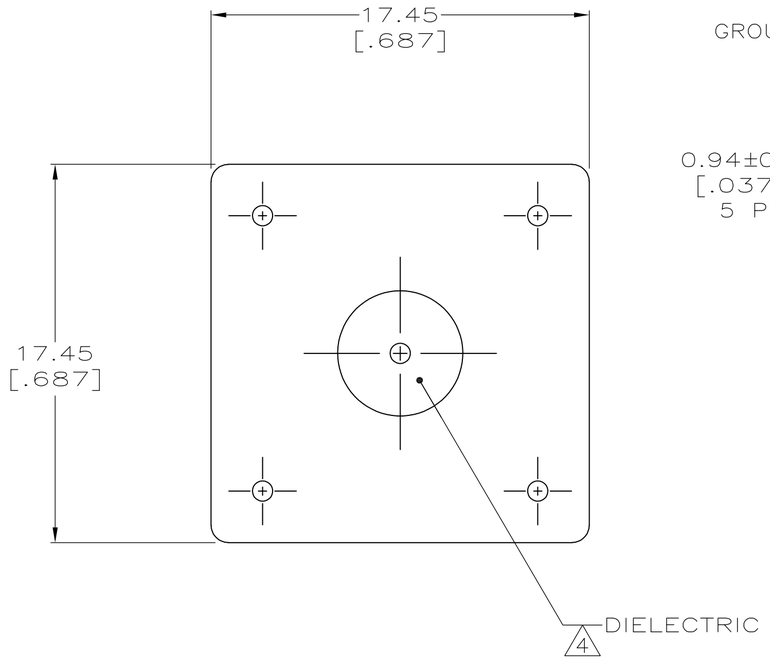

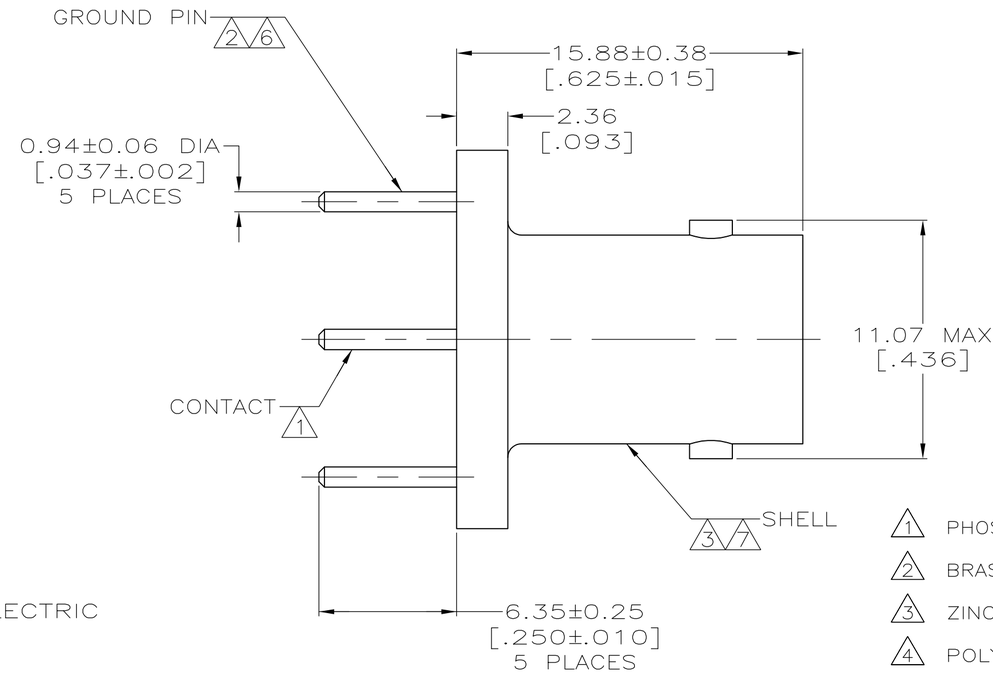

1 PHOSPHOR BRONZE PER QQ-B-750.

2 BRASS PER QQ-B-626.

3 ZINC PER QQ-Z-363.

4 POLYESTER, PBT, PER MIL-M-24519.


5 SILVER PLATE PER QQ-S-365
2.54μm [.000100] MINIMUM THICK.

6 TIN PLATE PER ASTM-B-545
2.54μm [.000100] MINIMUM THICK.

7 NICKEL PLATE PER QQ-N-290
3.81μm [.000150] MINIMUM THICK.

8 GOLD PLATE PER ASTM-B-488,
0.76μm [.000030] MINIMUM THICK.

9. SEE INSTRUCTION SHEET 408-9889.

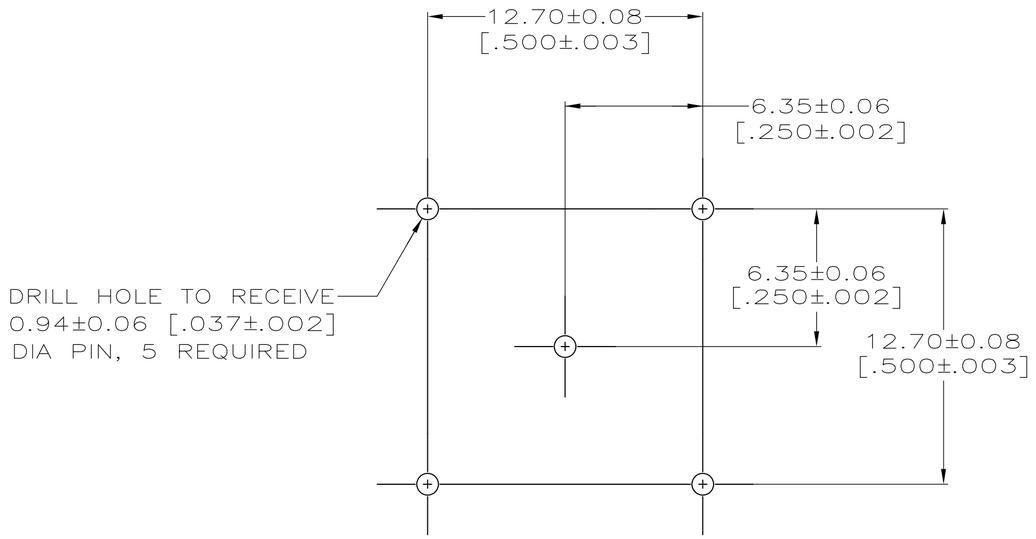

SUGGESTED PCB CONFIGURATION

6	5227699-3
8	5227699-2
5	5227699-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.20 [.008]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1 2 3 4

FINISH 5 6 7 8 9 10

DWN L. VARELA – DOCK5 21APR2005
CHK J. HAVENER 21APR2005
APVD J. LIPPERT 21APR2005
PRODUCT SPEC 108-12078
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME JACK, 50 OHM, VERTICAL, PCB, BNC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5227699	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV A1

5227699