

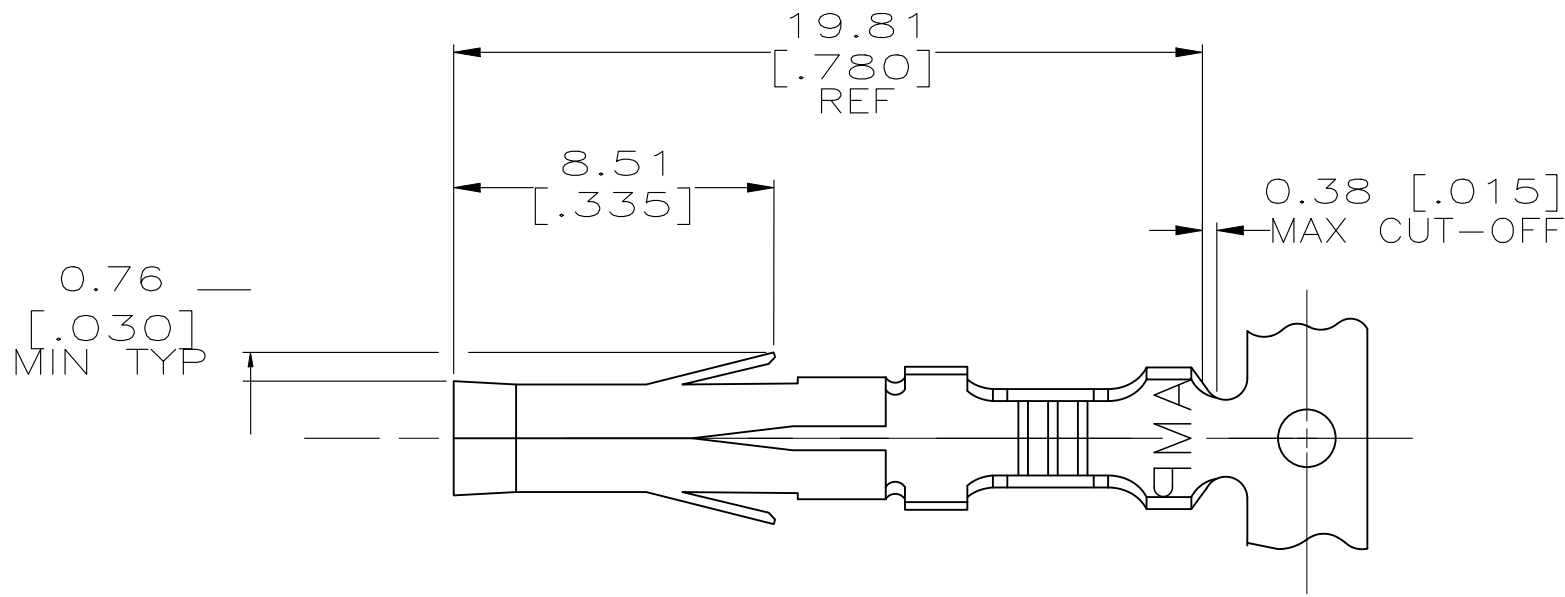
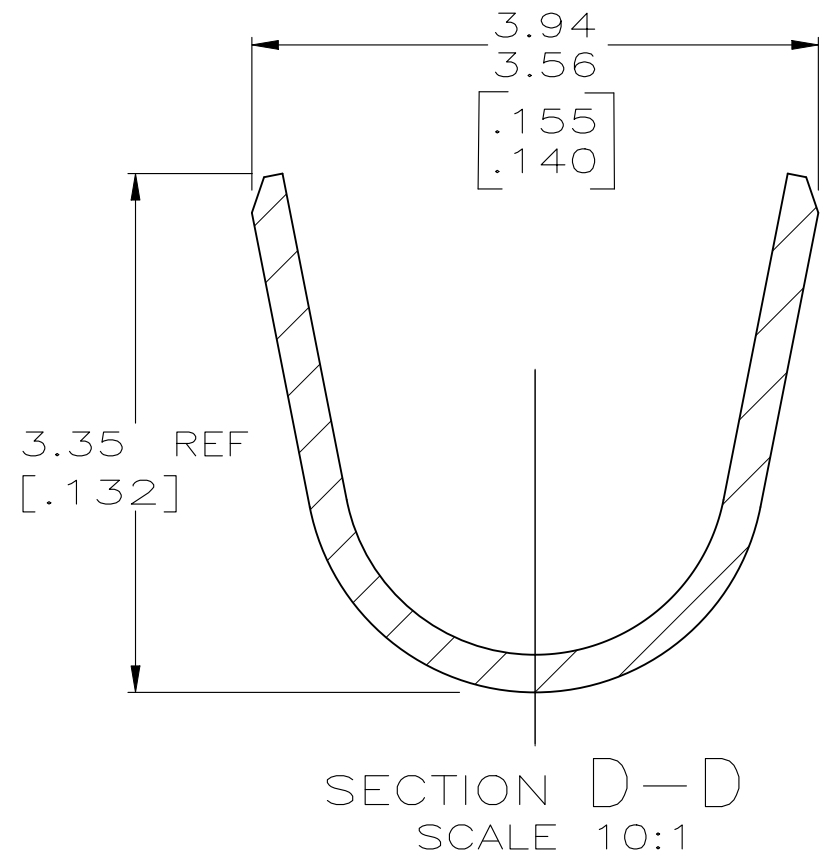
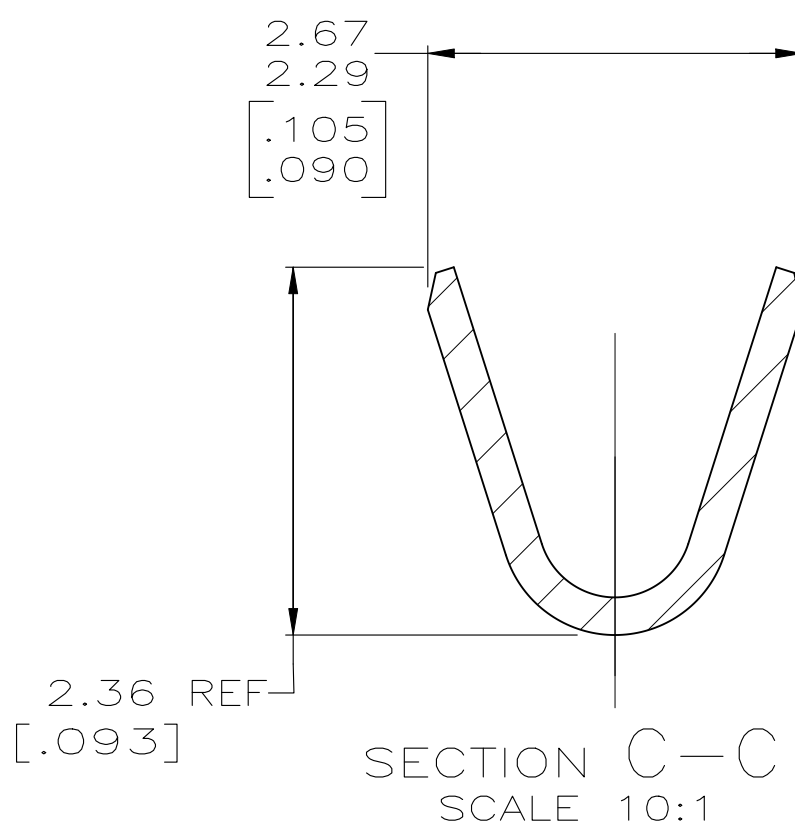
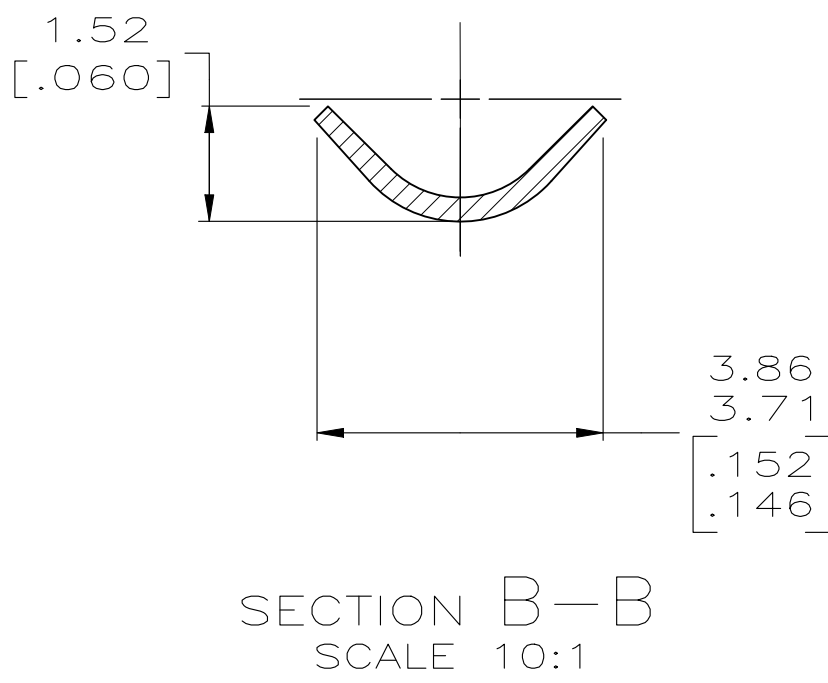
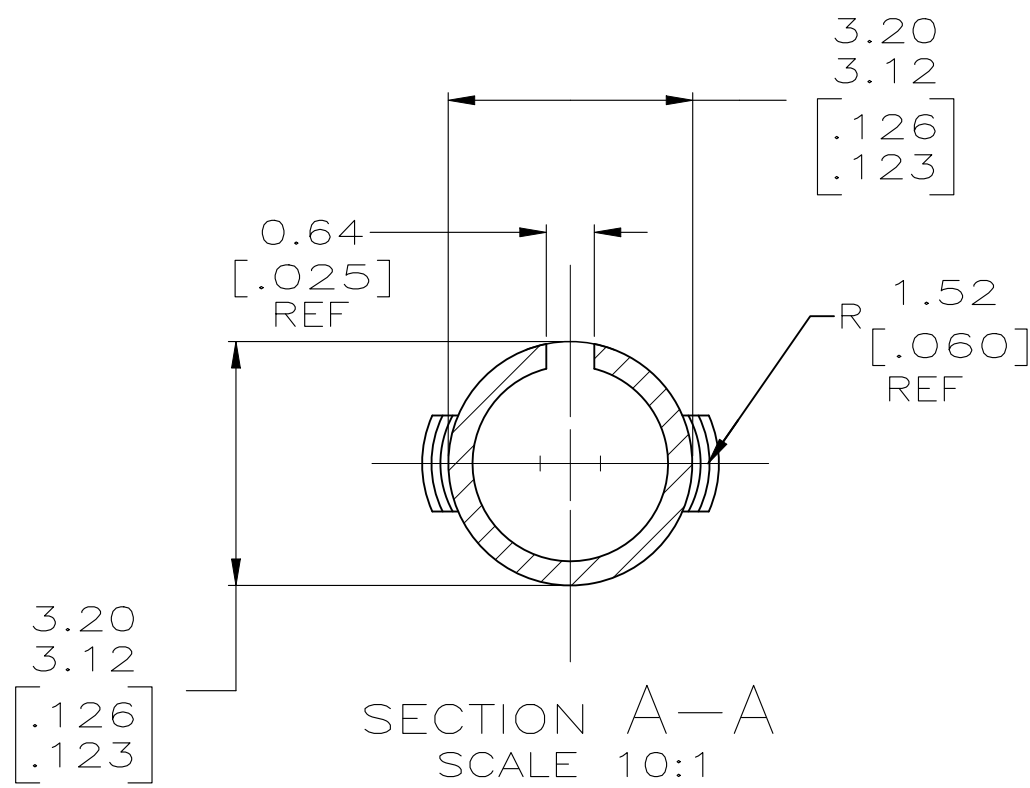


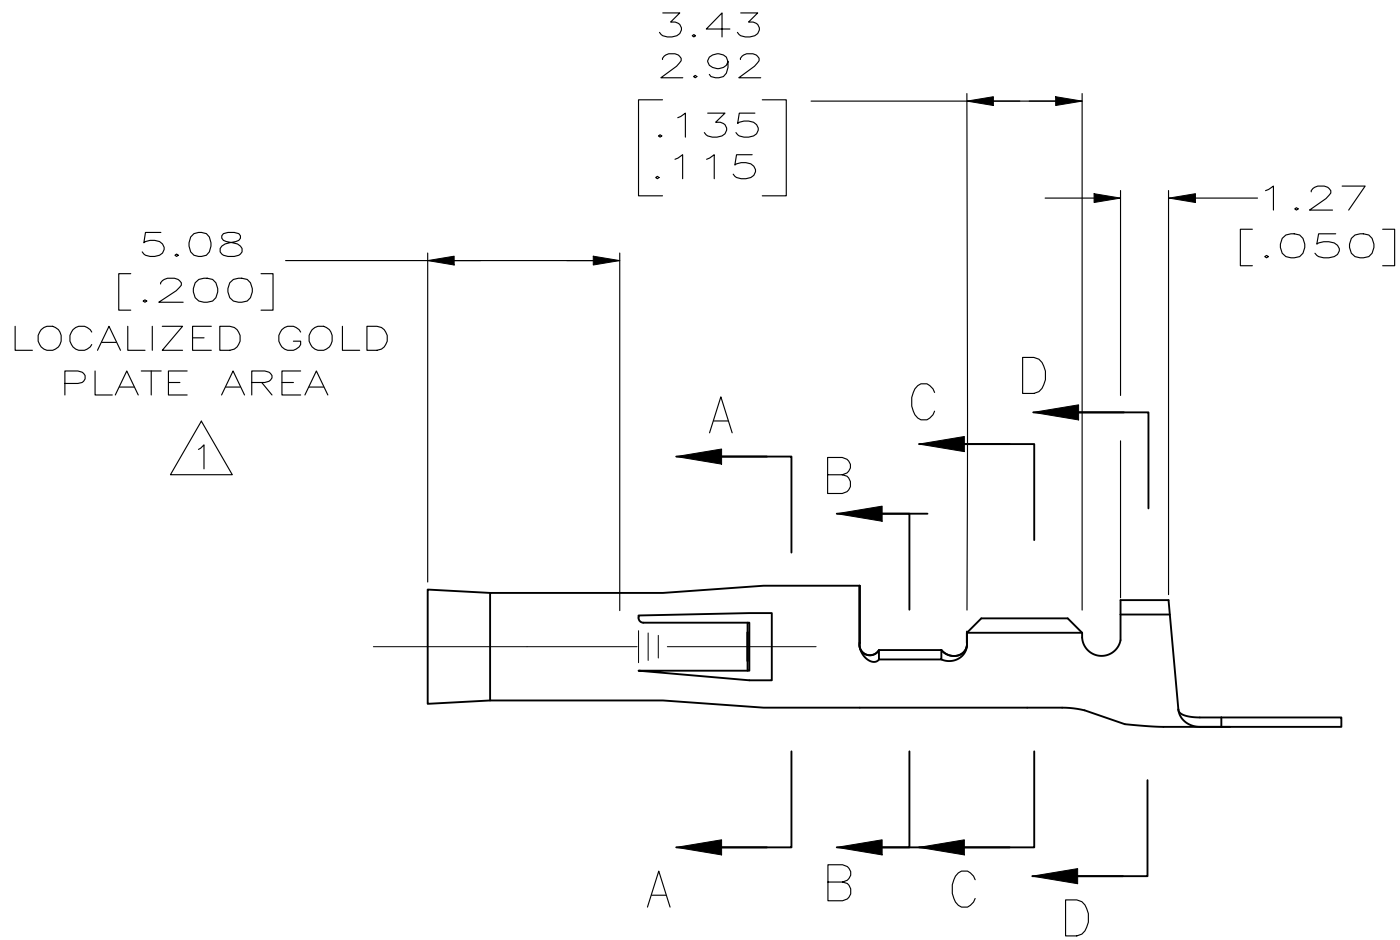

- 1
- 0.000762 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.
- 2
- WIRE RANGE: 0.3 – 0.84mm² (24–18 AWG).
- 3
- INSULATION RANGE: 2.79 [.110] MAX. DIA.
- 4
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5
- 0.00127 [.000050] MIN NICKEL

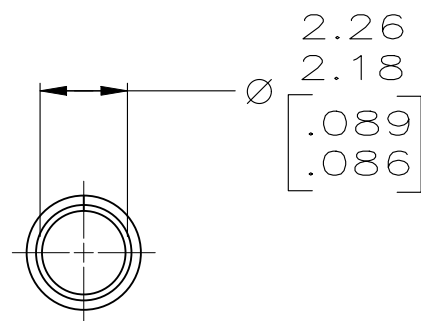

METRIC

	5	0.25 [.010] PH BRZ	350417-8
	GOLD STRIPE	0.25 [.010] BRASS	350417-5
OBSOLETE	1	0.25 [.010] BRASS	350417-3
	PRE-TIN	0.25 [.010] BRASS	350417-1
	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22NOV2005	TE Connectivity	
DIMENSIONS: mm (INCHES)		CHK D. COLEY 22NOV2005		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± - 3. PLC ± 0.13 [.005] 4. PLC ± - ± 0.30° ANGLES	PRODUCT SPEC 108-1038	NAME .093 SOCKET COMMERCIAL PIN AND SOCKET -	
		APPLICATION SPEC 114-49000		
		WEIGHT 0.000000	SIZE A1	CAGE CODE 00779
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING	SCALE N/A	SHEET 1 OF 1
		REV AP4	RESTRICTED TO -	