
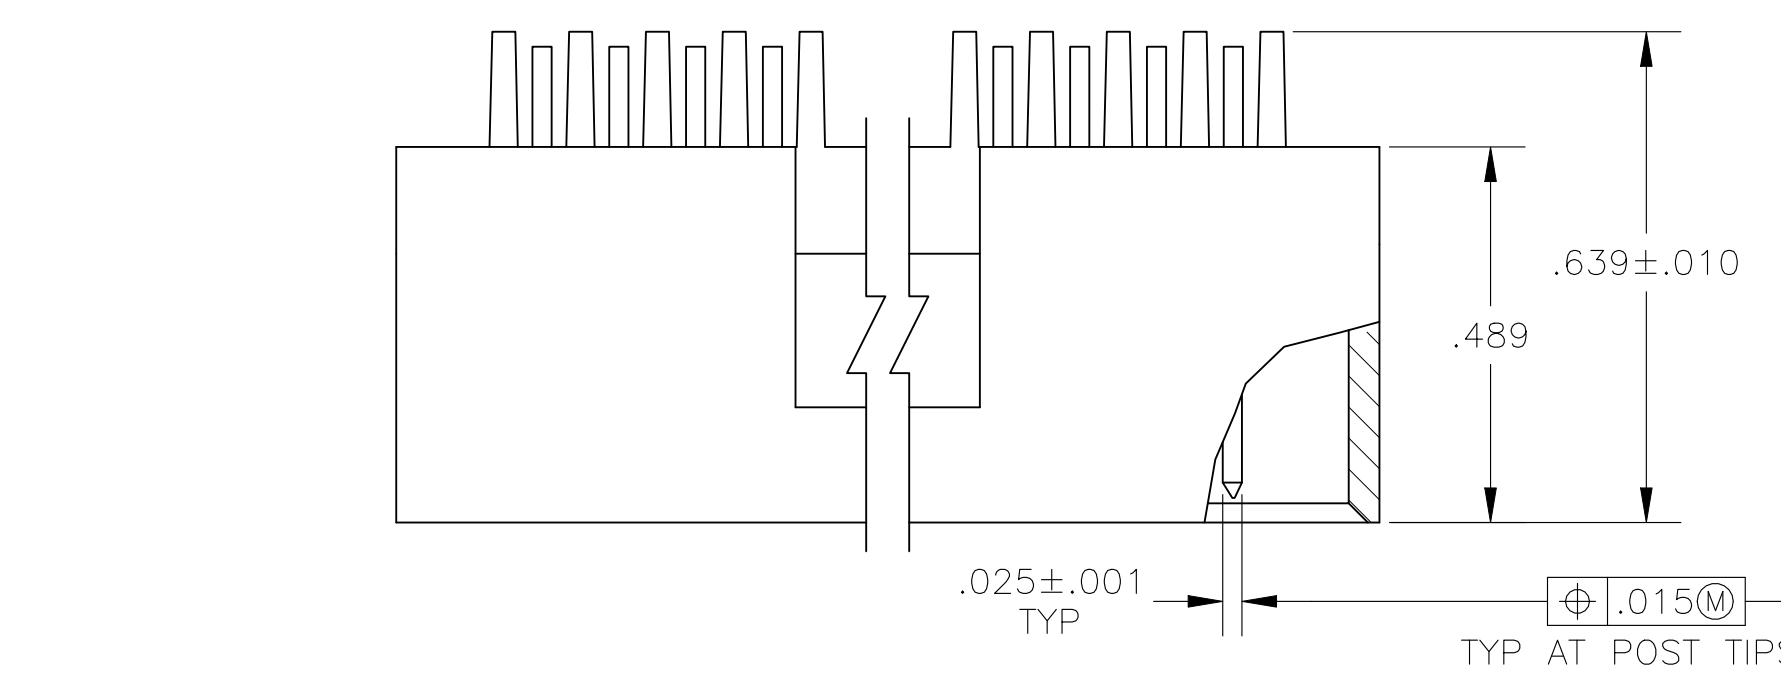
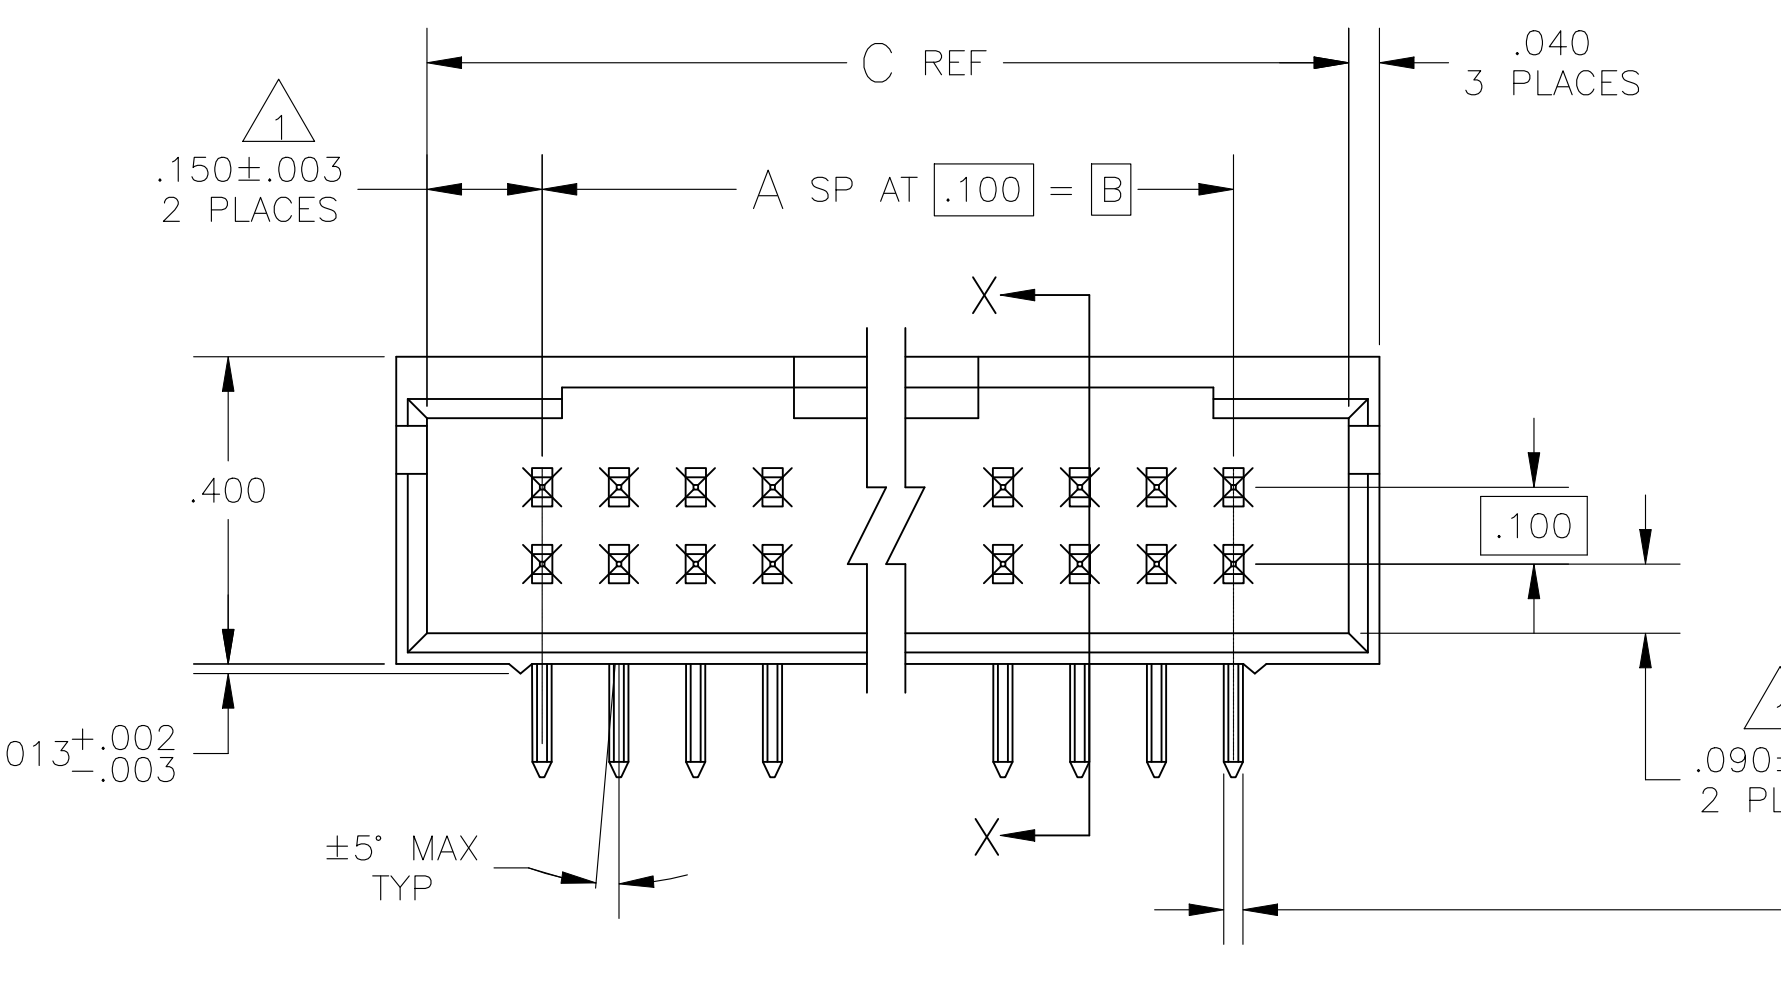
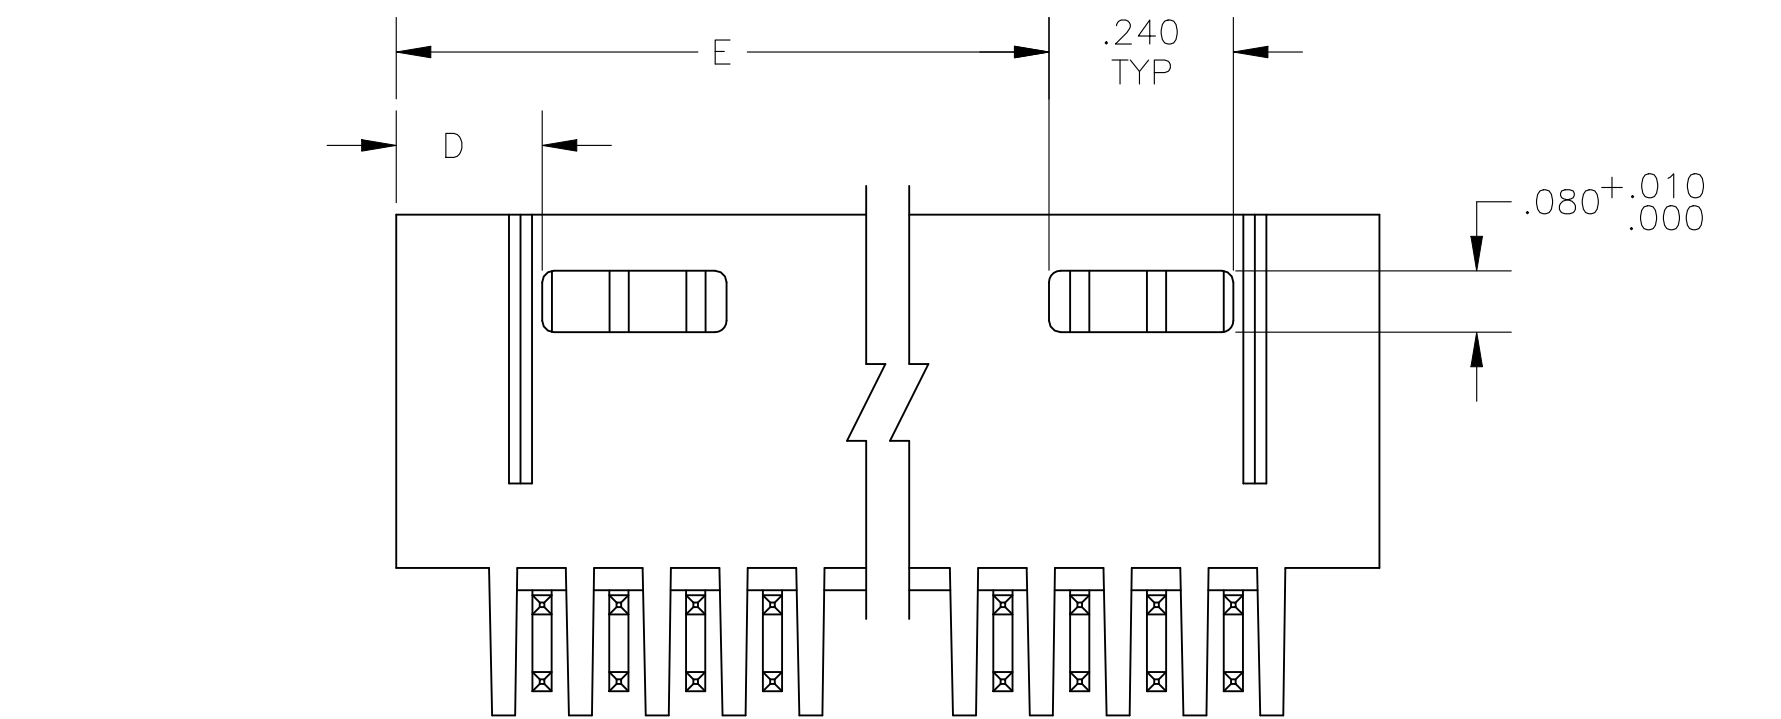


D

C


B

A

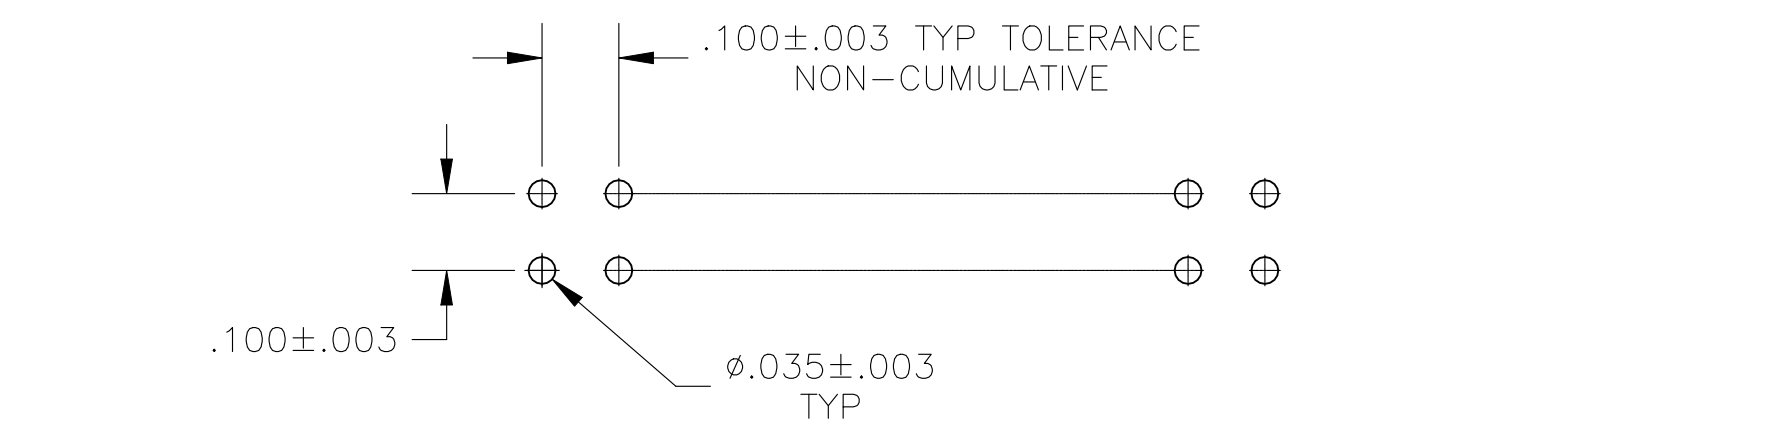

RECOMMENDED HOLE LAYOUT

- 1 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 POSTS: .000030 GOLD IN CONTACT AREA .000100-.000200 MATTE TIN LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 4 POSTS: .000030 GOLD IN CONTACT AREA .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

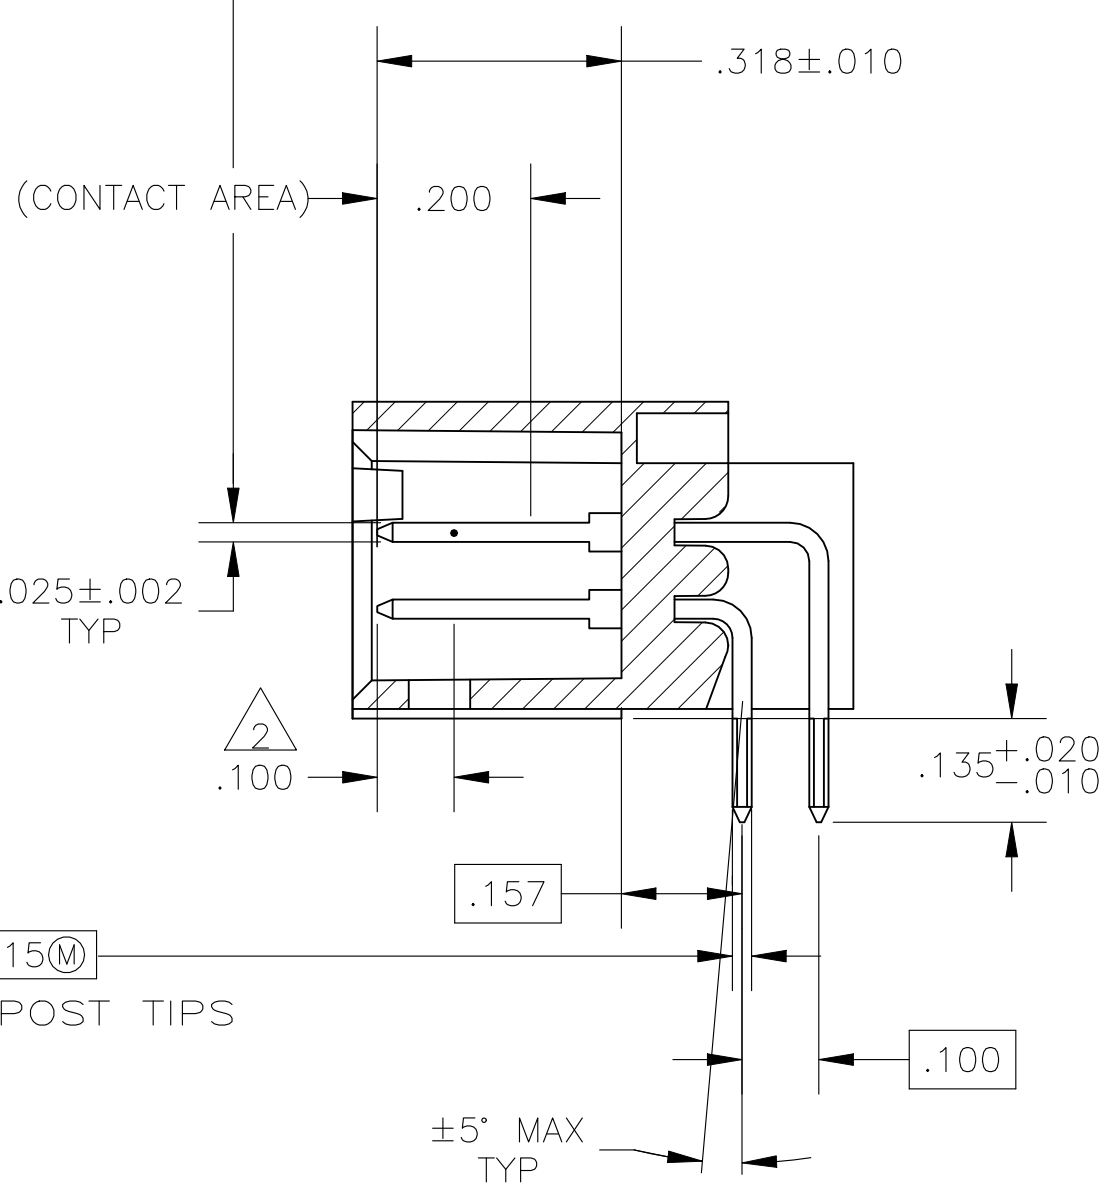

SECTION X-X

5	OBSOLETE		4				3.490	.190	3.800	3.500	35	72	8-103167-3
5	OBSOLETE		4				3.390	.190	3.700	3.400	34	70	8-103167-2
							3.290	.190	3.600	3.300	33	68	8-103167-1
5	OBSOLETE		4				3.190	.190	3.500	3.200	32	66	8-103167-0
5	OBSOLETE			4			3.090	.190	3.400	3.100	31	64	7-103167-9
5	OBSOLETE		4				2.990	.190	3.300	3.000	30	62	7-103167-8
							2.890	.190	3.200	2.900	29	60	7-103167-7
5	OBSOLETE		4				2.790	.190	3.100	2.800	28	58	7-103167-6
5	OBSOLETE			4			2.690	.190	3.000	2.700	27	56	7-103167-5
5	OBSOLETE		4				2.590	.190	2.900	2.600	26	54	7-103167-4
5	OBSOLETE			4			2.490	.190	2.800	2.500	25	52	7-103167-3
5	OBSOLETE		4				2.390	.190	2.700	2.400	24	50	7-103167-2
5	OBSOLETE			4			2.290	.190	2.600	2.300	23	48	7-103167-1
5	OBSOLETE		4				2.190	.190	2.500	2.200	22	46	7-103167-0
5	OBSOLETE			4			2.090	.190	2.400	2.100	21	44	6-103167-9
5	OBSOLETE		4				1.990	.190	2.300	2.000	20	42	6-103167-8
							1.890	.190	2.200	1.900	19	40	6-103167-7
5	OBSOLETE		4				1.790	.190	2.100	1.800	18	38	6-103167-6
5	OBSOLETE			4			1.690	.190	2.000	1.700	17	36	6-103167-5
							1.590	.190	1.900	1.600	16	34	6-103167-4
5	OBSOLETE		4				1.490	.190	1.800	1.500	15	32	6-103167-3
5	OBSOLETE			4			1.390	.190	1.700	1.400	14	30	6-103167-2
5	OBSOLETE				4		1.290	.190	1.600	1.300	13	28	6-103167-1
					4		1.190	.190	1.500	1.200	12	26	6-103167-0
						4	1.090	.190	1.400	1.100	11	24	5-103167-9
						4	.990	.190	1.300	1.000	10	22	5-103167-8
						4	.890	.190	1.200	.900	9	20	5-103167-7
						4	—	.490	1.100	.800	8	18	5-103167-6
						4	—	.390	1.000	.700	7	16	5-103167-5
						4	—	.390	.900	.600	6	14	5-103167-4
						4	—	.290	.800	.500	5	12	5-103167-3
						4	—	.290	.700	.400	4	10	5-103167-2
						4	—	.190	.600	.300	3	8	5-103167-1
5	OBSOLETE			4			3.490	.190	3.800	3.500	35	72	3-103167-3
5	OBSOLETE		3				3.390	.190	3.700	3.400	34	70	3-103167-2
						3	3.290	.190	3.600	3.300	33	68	3-103167-1
5	OBSOLETE			3			3.190	.190	3.500	3.200	32	66	3-103167-0
5	OBSOLETE		3				3.090	.190	3.400	3.100	31	64	2-103167-9
5	OBSOLETE			3			2.990	.190	3.300	3.000	30	62	2-103167-8
					3		2.890	.190	3.200	2.900	29	60	2-103167-7
5	OBSOLETE				3		2.790	.190	3.100	2.800	28	58	2-103167-6
5	OBSOLETE		3				2.690	.190	3.000	2.700	27	56	2-103167-5
5	OBSOLETE			3			2.590	.190	2.900	2.600	26	54	2-103167-4
5	OBSOLETE				3		2.490	.190	2.800	2.500	25	52	2-103167-3
					3		2.390	.190	2.700	2.400	24	50	2-103167-2
5	OBSOLETE		3				2.290	.190	2.600	2.300	23	48	2-103167-1
5	OBSOLETE			3			2.190	.190	2.500	2.200	22	46	2-103167-0
5	OBSOLETE		3				2.090	.190	2.400	2.100	21	44	1-103167-9
5	OBSOLETE			3			1.990	.190	2.300	2.000	20	42	1-103167-8
					3		1.890	.190	2.200	1.900	19	40	1-103167-7
5	OBSOLETE				3		1.790	.190	2.100	1.800	18	38	1-103167-6
5	OBSOLETE		3				1.690	.190	2.000	1.700	17	36	1-103167-5
					3		1.590	.190	1.900	1.600	16	34	1-103167-4
						3	1.490	.190	1.800	1.500	15	32	1-103167-3
						3	1.390	.190	1.700	1.400	14	30	1-103167-2
5	OBSOLETE		3				1.290	.190	1.600	1.300	13	28	1-103167-1
					3		1.190	.190	1.500	1.200	12	26	1-103167-0
						3	1.090	.190	1.400	1.100	11	24	103167-9
						3	.990	.190	1.300	1.000	10	22	103167-8
						3	.890	.190	1.200	.900	9	20	103167-7
						3	—	.490	1.100	.800	8	18	103167-6
						3	—	.390	1.000	.700	7	16	103167-5
						3	—	.390	.900	.600	6	14	103167-4
						3	—	.290	.800	.500	5	12	103167-3
						3	—	.290	.700	.400	4	10	103167-2
						3	—	.190	.600	.300	3	8	103167-1
OBSOLETE							NO OF POSN		ASSEMBLY PART NUMBER				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0. PLC ± -
1. PLC ± -
2. PLC ± -
3. PLC ± .005
4. PLC ± -
ANGLES ± -

MATERIAL: HOUSING: FLAME RESISTANT COLOR: BLACK POSTS: PHOS BRONZE

FINISH: SEE TABLE

DWN: H. MOLL 27JUL87
CHK: R. FEIDT 28JUL87
APVD: R. FLICKER 29JUL87

NAME: HDR ASSY, MOD II, SHROUDED, 4 SIDES, DR, .100X.100 RIGHT ANGLE, W/ .025 SQ POSTS

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 103167

WEIGHT: —

CUSTOMER DRAWING

TE Connectivity

SCALE: 4:1 SHEET 1 OF 1 REV N5