
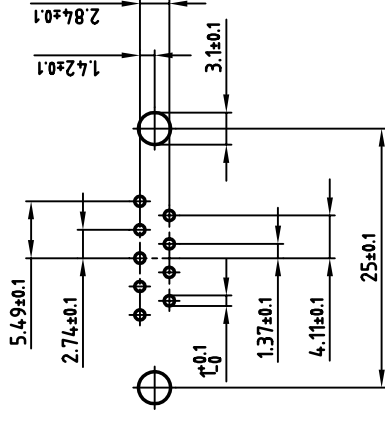

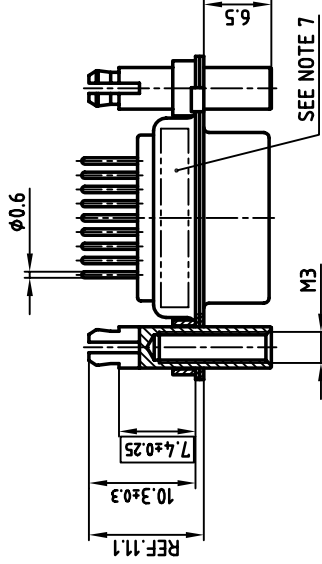


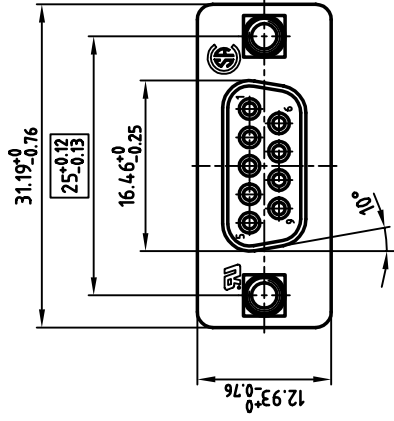

P.C.B. HOLE DRILLINGS

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. THREADED LOCK / SPACER CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
7. CONNECTOR IS PART MARKED: 164A16719X CONEC Y/WW
8. = CRITICAL DIMENSION

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

2001	date	name
drawn	10.09.	E. Mickenbecker
appd.	10.09.	A. Mickenbecker
norm	DIN 41652	
d-old		

tolerance	scale:	material:
	2:1	SEE NOTES

title:
D-SUB FEMALE
9pos. SOLDER PIN STRAIGHT
with threaded lock and spacer clip
dwg no: 16K1A295A
AutoCAD 2000
DIN-A
3
sh: 1/1

part no:	164A16719X
----------	------------

used for: D-SUB