
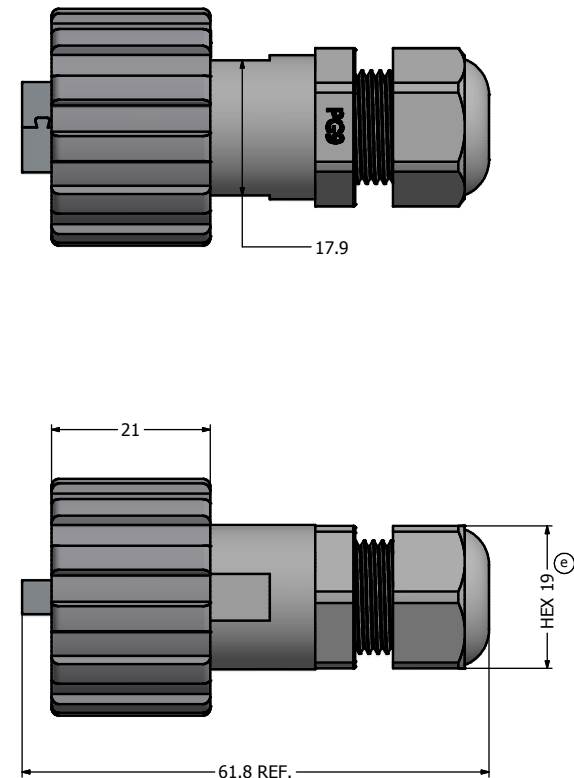


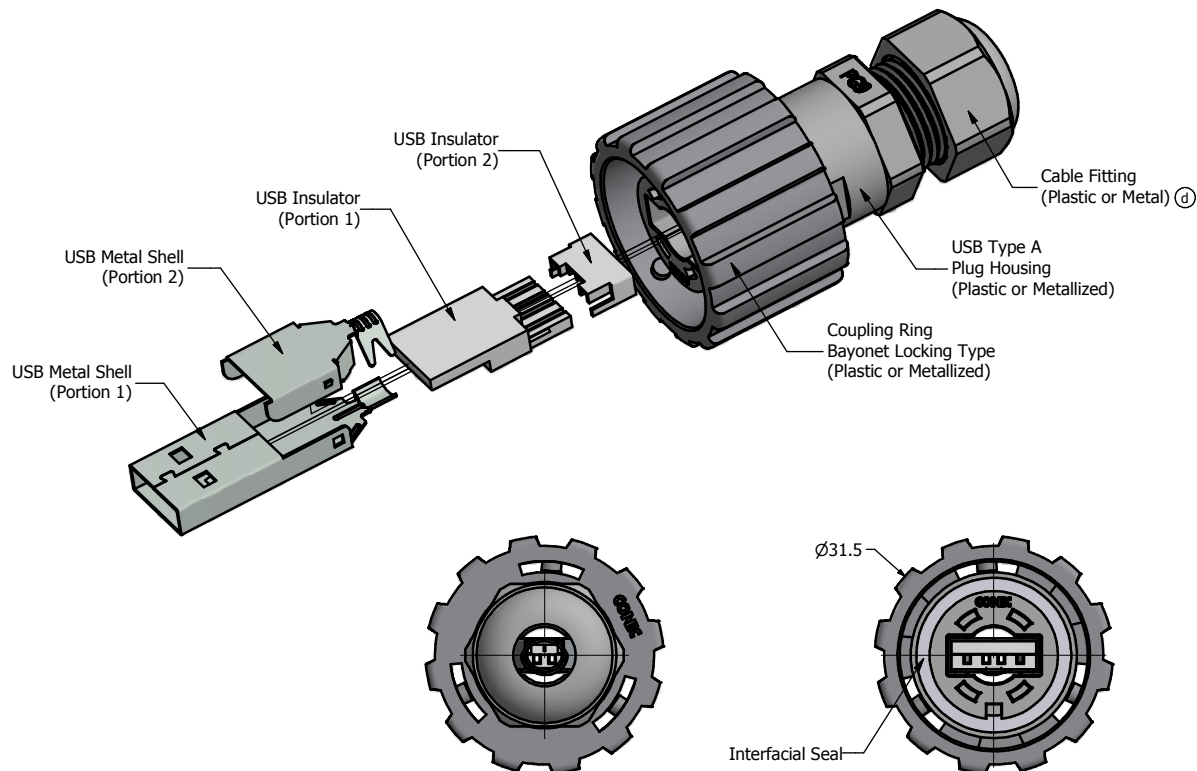

Notes:

1. Electrical Specifications:
 - Meets USB 2.0 Specification
 - Contact Resistance: 30 mOhm max.
 - Insulation Resistance: 1000 MOhm min. @ 100 VDC
 - Current Rating: 1.5 A max. at 25° C
 - Working Voltage: 30 V (RMS) max.
 - DWV: 500 VAC/60s at sea Level
 - Operating Temperature: -40° C to +85° C
2. Material and Finish:
 - Coupling Ring and Plug Housing: Polyester (Black), UL94 V-0 or Metallized ABS (Nickel Plated), UL94 V-0
 - Interfacial Seal: Silicon, Color: White
 - Cable Fitting: PA (Black), UL94 V-0
 - Cable Fitting Rubber Ring: NBR, Color: Black
 - USB Metal Shell: SPCC, Nickel Plated
 - USB Insulator: PBT, UL94 V-0, White
 - USB Contacts: Copper Alloy,
 - USB Contact Finish: 30 u" Gold min. over Nickel for mating area, Tin over Nickel for solder cup
3. USB Type A Plug accepts AWG28 to AWG24 wires, Cable OD of 4.0 mm to 5.5 mm
4. IP67 rated when fully mated with the appropriate mating connector

RoHS Compliant

Version	Part Number
Plastic Version	17-200121
Metallized Plastic Version	17-200131

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION OF CONEC CORPORATION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.	Customer:				Tolerance Unless otherwise specified 0 PLC ±0.50 1 PLC ±0.38 2 PLC ±0.25 3 PLC ±0.10 ANGLES ±3°				Scale: 1.5:1	Dim. in mm	
	Name		Title	Approval Date	Autodesk Inventor		Material: See Notes				
	f	1 x f	Apr/21/2017	Vincent Ke	2008	Date	Name	Title: IP67 USB USB 2.0 Type A Plug Assembly Kit Solder Cup Version			
	e	2 x e	Jun/23/2014	Vincent Ke	Draw.	Sept. 09	Vincent Ke				
	d	1 x d	Jan/06/2012	Vincent ke	Appd.	Sept. 09	J. Chaudry				
	c	1 x c	Mar/18/2010	Vincent ke	Norm						
	b	1 x b	Jun/01/2009	Vincent ke	D-old						
	a	original						Drawing No.: 39K1A364			DIN A3
	Rev.	Changes	Date	Name							