

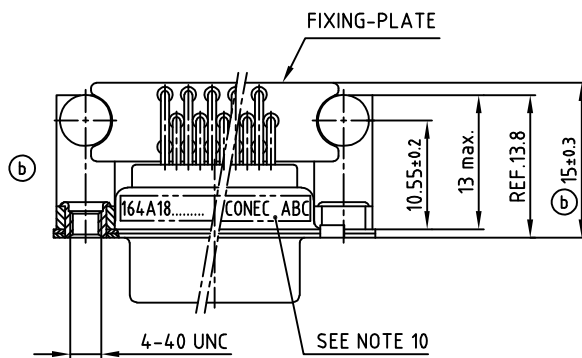
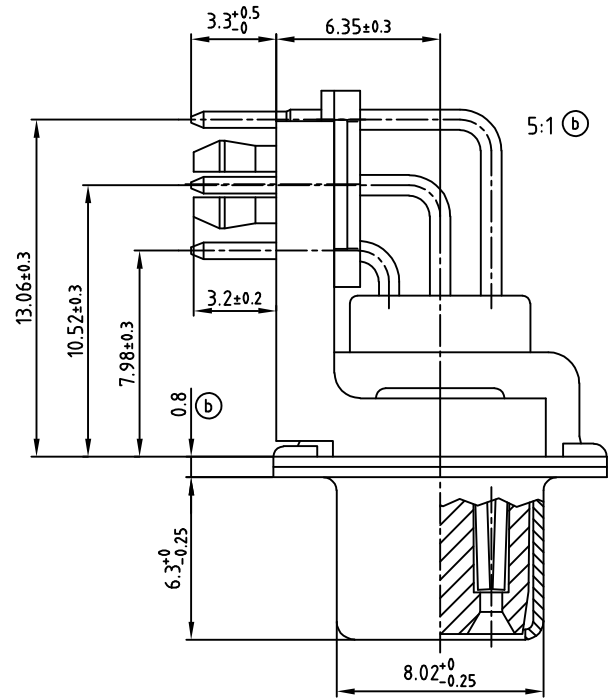


used for: D-SUB HD

POS.	A -0.76	B -0.25	C	Part NO.
26	39.52	24.79	33.30 $+0.15$ -0.1	164A18189X
44	53.42	38.50	47.04 ± 0.13	164A18199X
62	69.70	54.96	63.50 ± 0.13	164A18209X

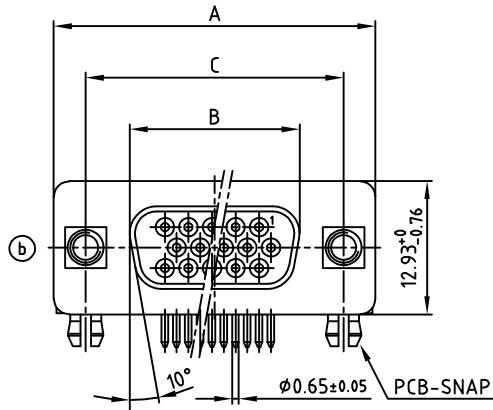

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- PCB-SNAPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- FIXING-PLATE: PBT GF UL 94 V-0; BLACK
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

2 x c	Ä 3543	14.01.2010	Lehmen	d-old
8 x b	Ä 3524	10.12.2009	Lehmen	
a	Origin			
rev.	description	date	name	

tolerance

scale:
material:

2:1 (5:1)

SEE NOTES

title:

D-SUB HD FEMALE 90°

© 26-62pos. 0.350inch

thread insert,metal bracket,fixing-plate,snap

dwg no:

AutoCAD 2006

DIN-A

16K1A375A

3


sh:1/2

part no:


SEE TABLE

CONEC®


P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

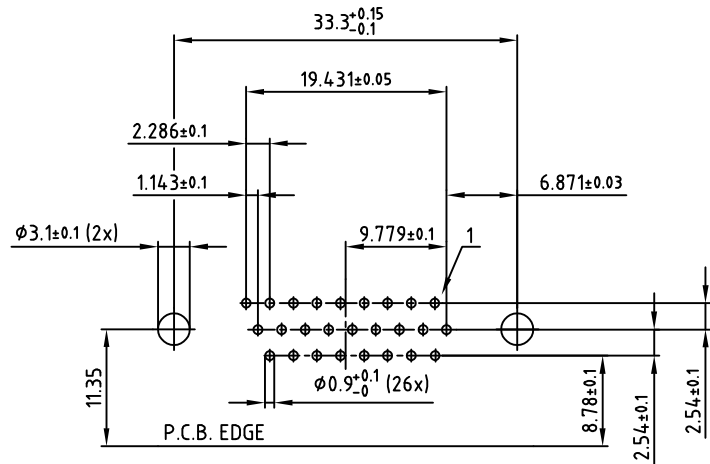

26pos.

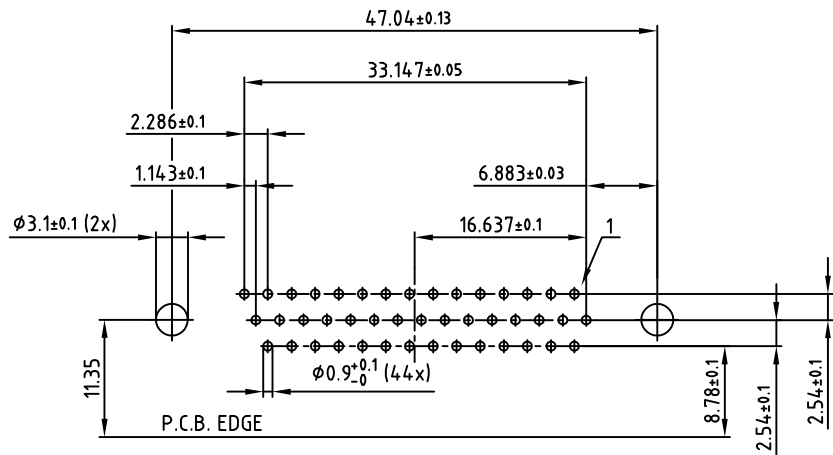

44pos.

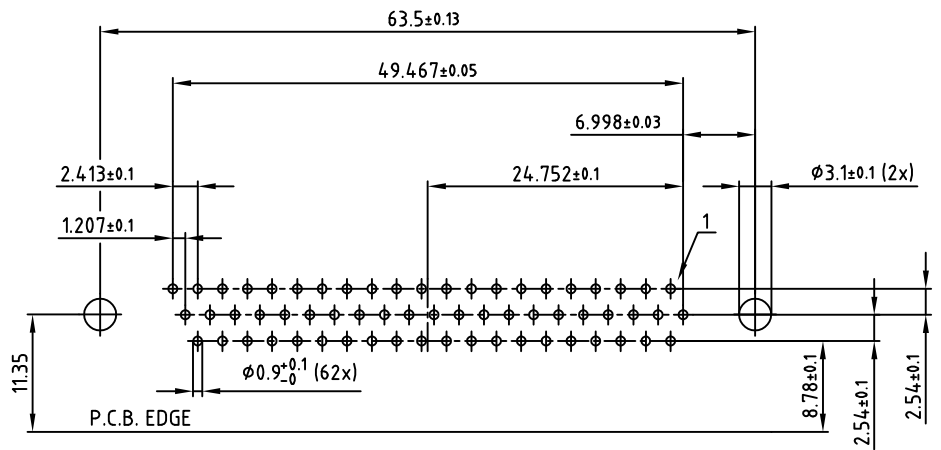

62pos.

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

1 x c	Ä 3543	14.01.2010	Lehmen
a	Origin		
rev.	description	date	name

tolerance	dim. in mm
2009	date
drawn	10.12.
appd.	10.12.
norm	
d-old	
name	
name	

scale:	2:1
material:	SEE SHEET 1
title:	© P.C.B. HOLE DRILLINGS D-SUB HD FEMALE 90° 26-62pos. 0.350inch thread insert,metal bracket,fixing-plate,snap
dwg no:	AutoCAD 2006 DIN-A
part no:	SEE SHEET 1



16K1A375A

3
sh:2/2