





LOC —	DIST —	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
		F		REVISED PER ECR-20-100915	28APR2021	JP	VS	
		G		REVISED PER ECR-22-130081	12OCT2022	SKR	DS	
		H		REVISED PER ECR-22-146226	09NOV2022	RS	DS	
		H1		REVISED PER ECR-22-158310	16NOV2022	RS	DS	

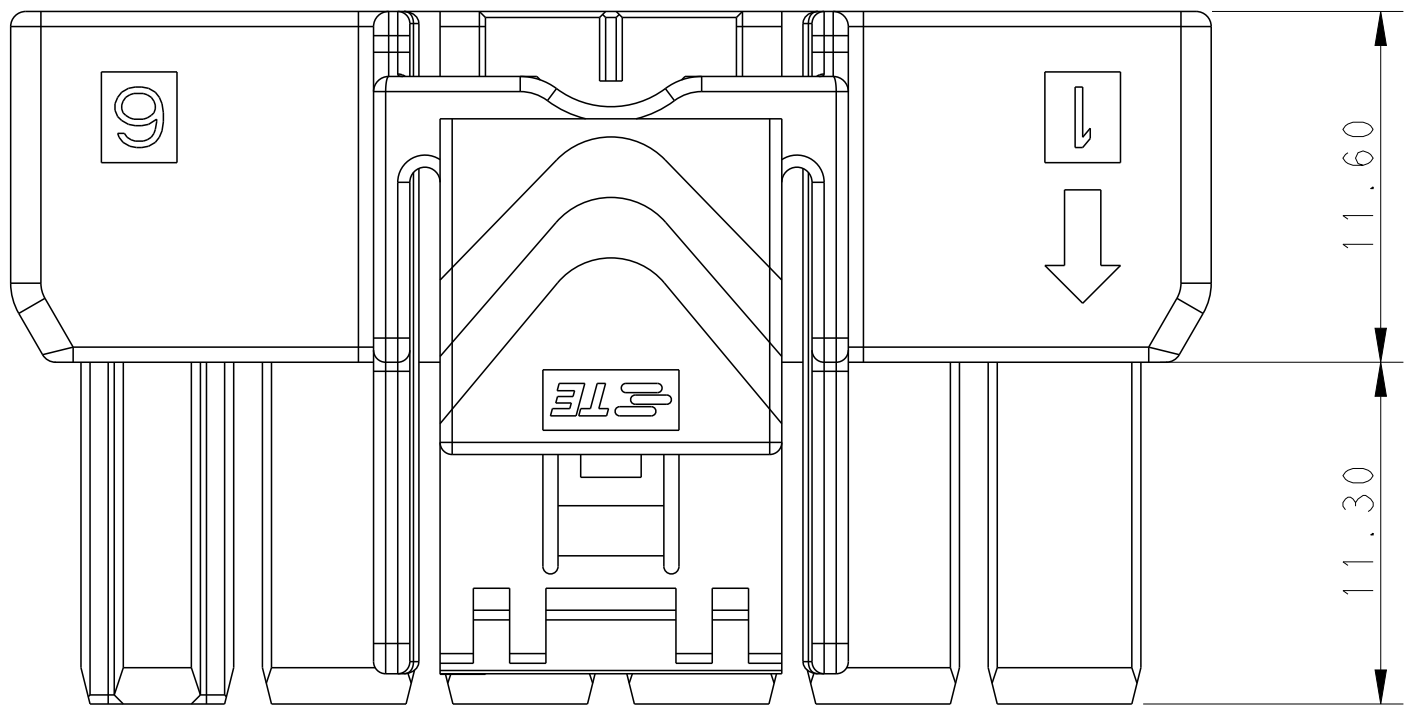


POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

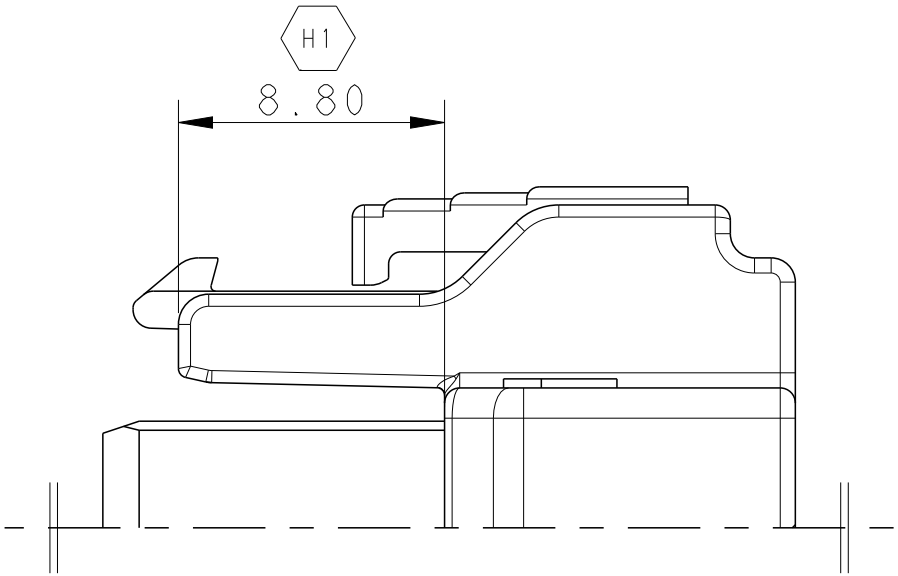

SIDE RAIL DESIGN FOR
LEVEL 1 RESIN

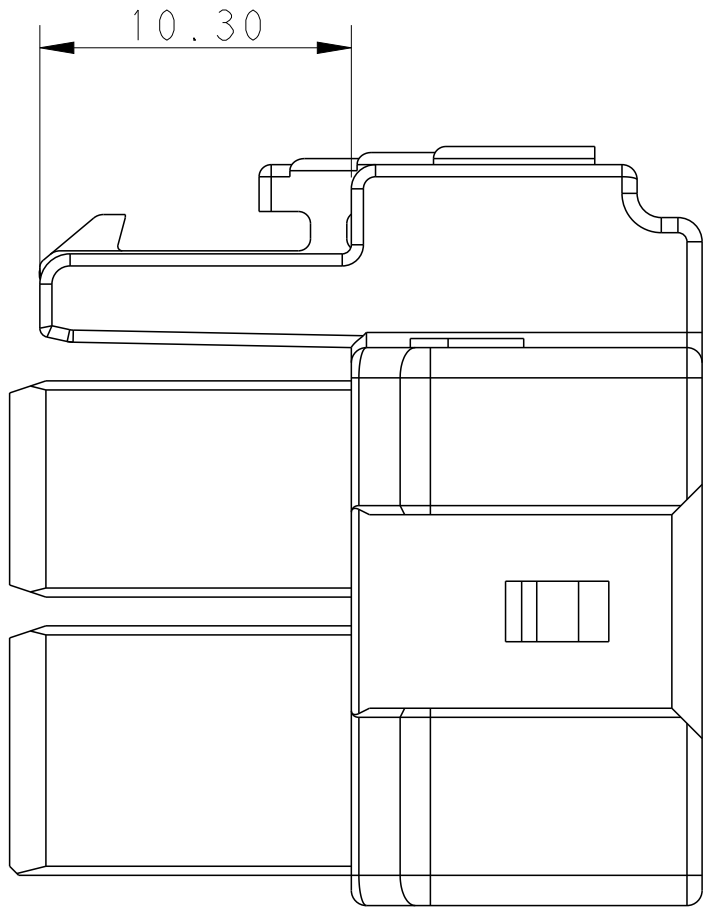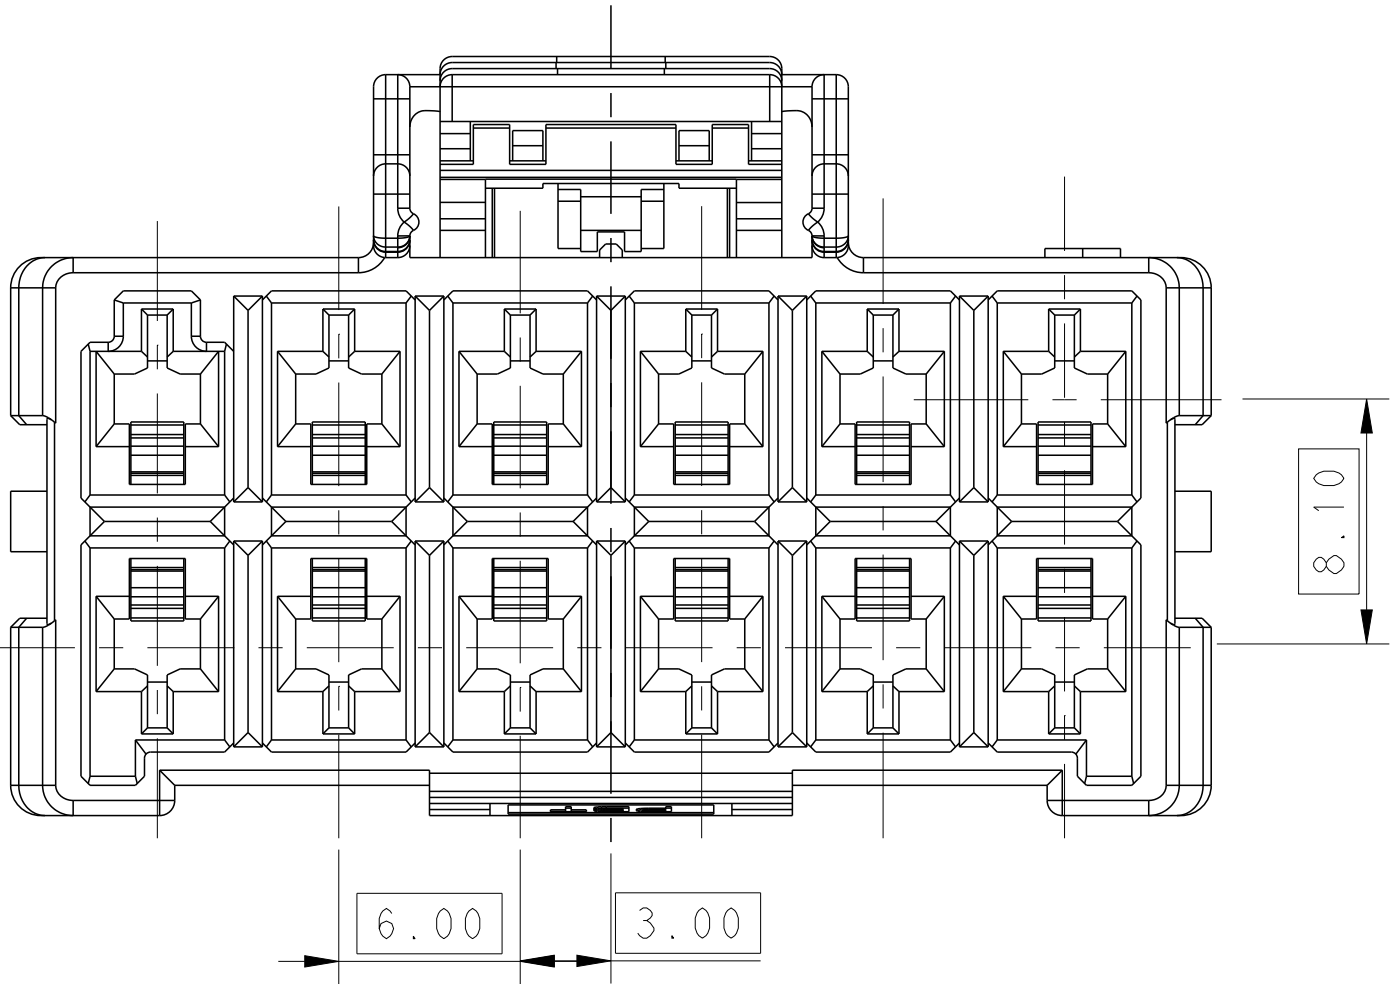


SIDE RAIL DESIGN FOR
LEVEL 2 RESIN

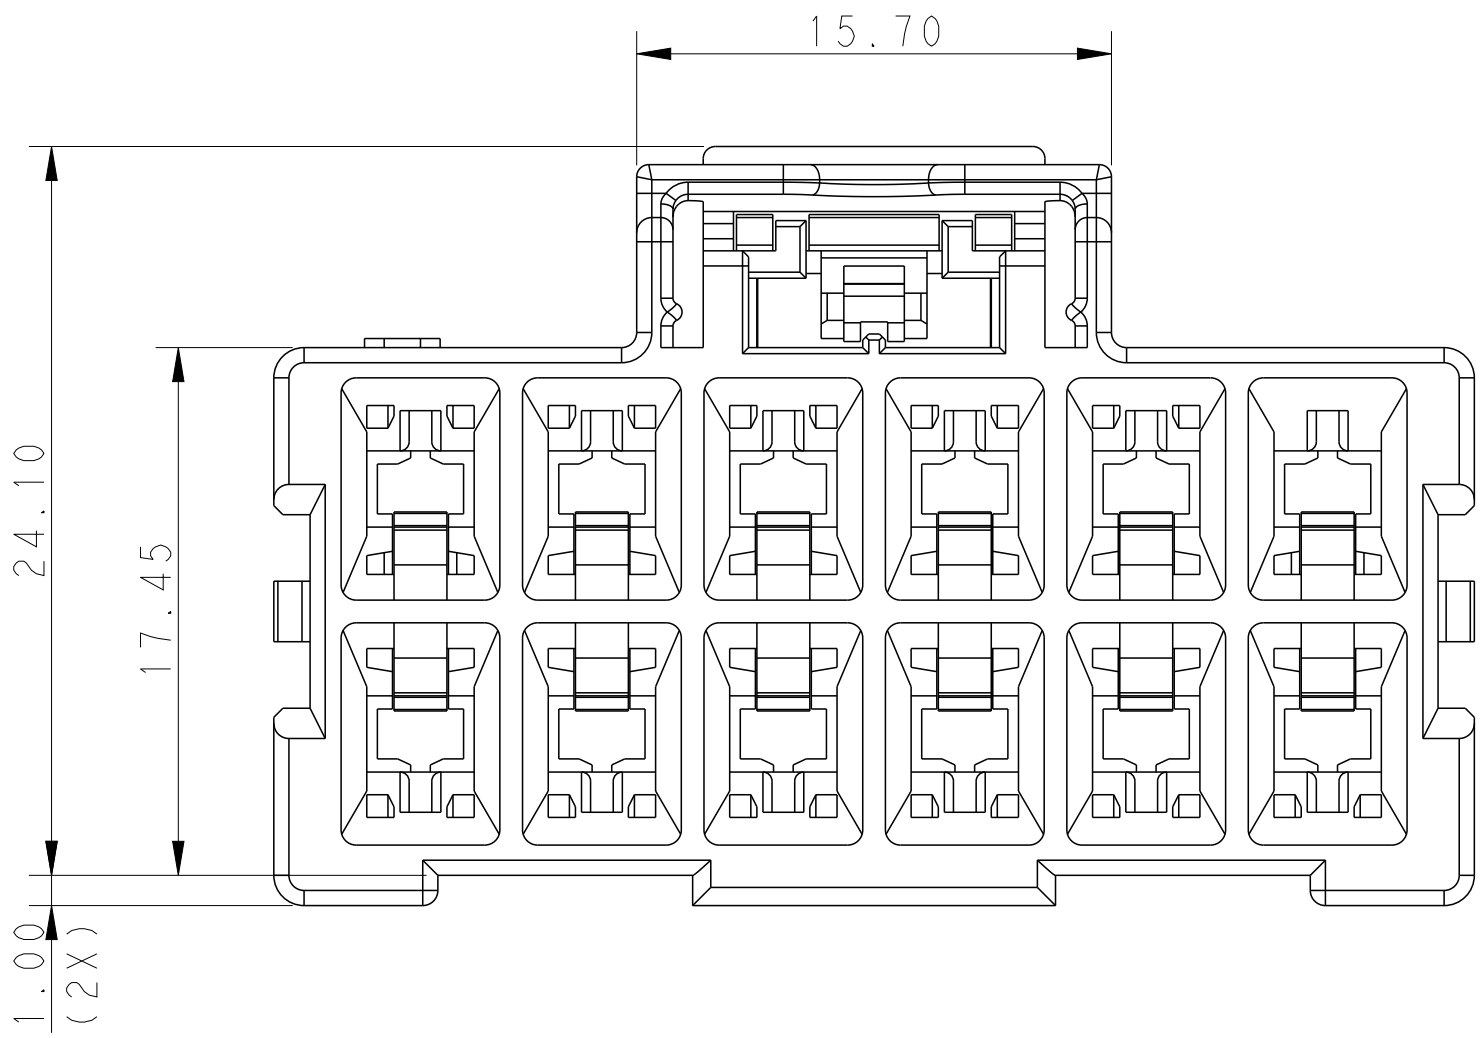

- 1 MATERIAL:
LEVEL 1: PBT,STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW
- LEVEL 2: PA66,HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL


- 2 MATERIAL MARK:
LEVEL 1:PBT,LEVEL 2:HDT
3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
4. MATING CONN, P/N
CAP HSG:*-1971774/5-*
TPA (LOCKING PLATE):*-1971778-*

- 5 GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850° C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775° C.

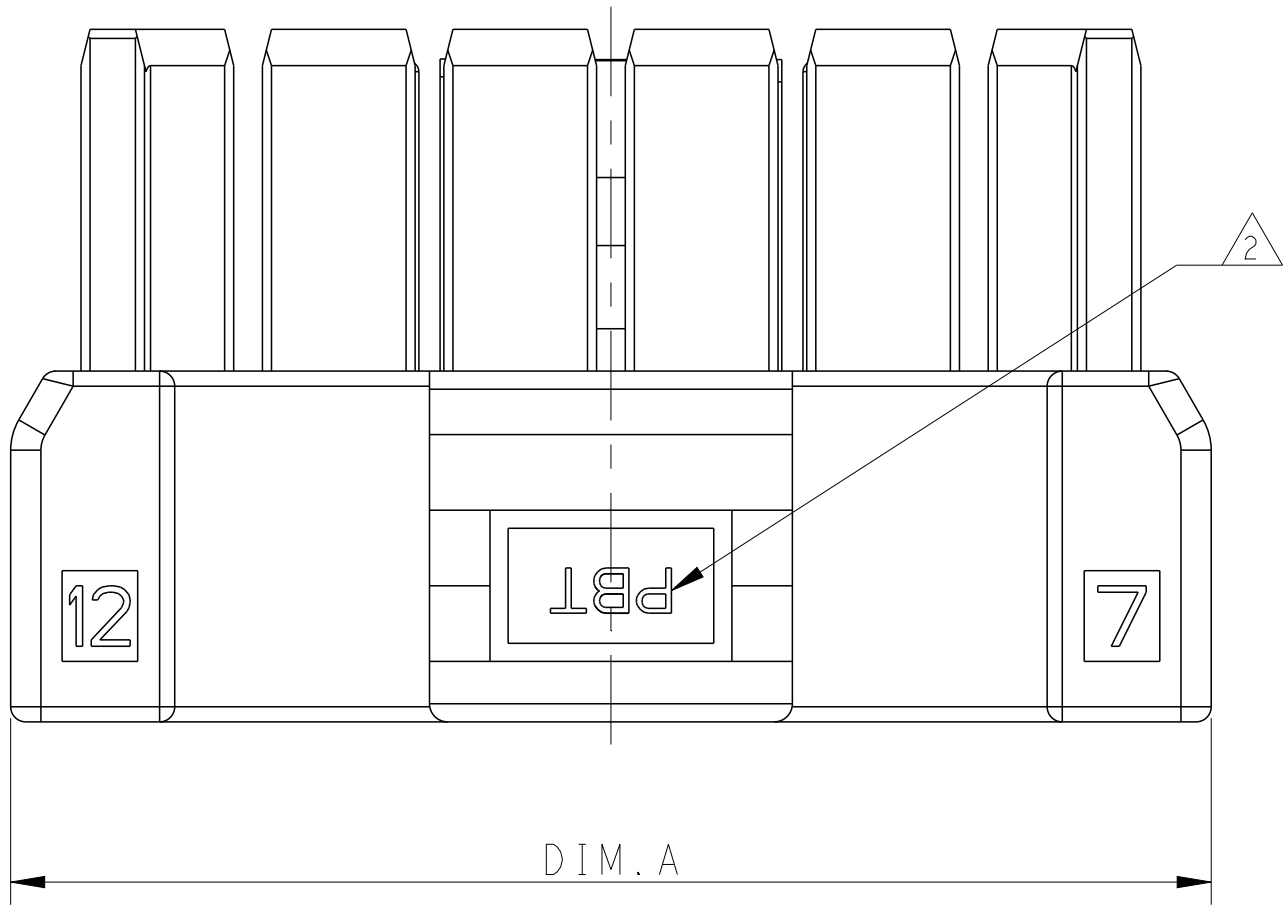


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	TE Connectivity	
		CHK HAPYE WU 09JUL2012		
		APVD YUHONG MAO 09JUL2012		
		NAME		
DIMENSIONS:		PRODUCT SPEC	PLUG HOUSING,DOUBLE ROW POWER TRIPLE LOCK -	
mm		APPLICATION SPEC		
		SIZE CAGE CODE DRAWING NO	A100779C=1971776	
		RESTRICTED TO		
MATERIAL		WEIGHT		
		Customer Drawing		
		SCALE 4:1	SHEET 1 OF 2	
			REV H1	


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

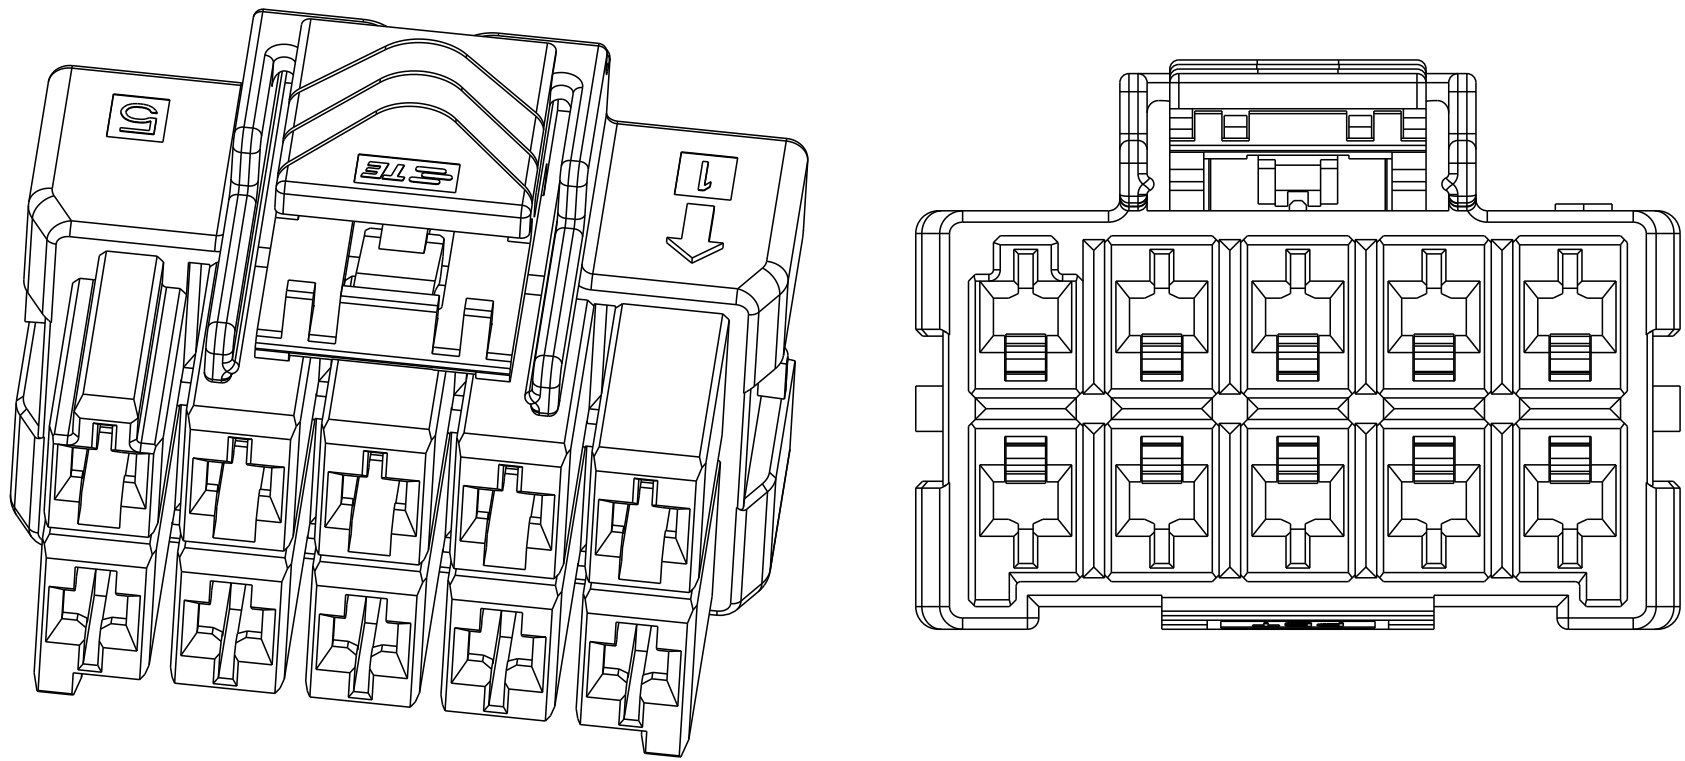


2*5 POSITIONS

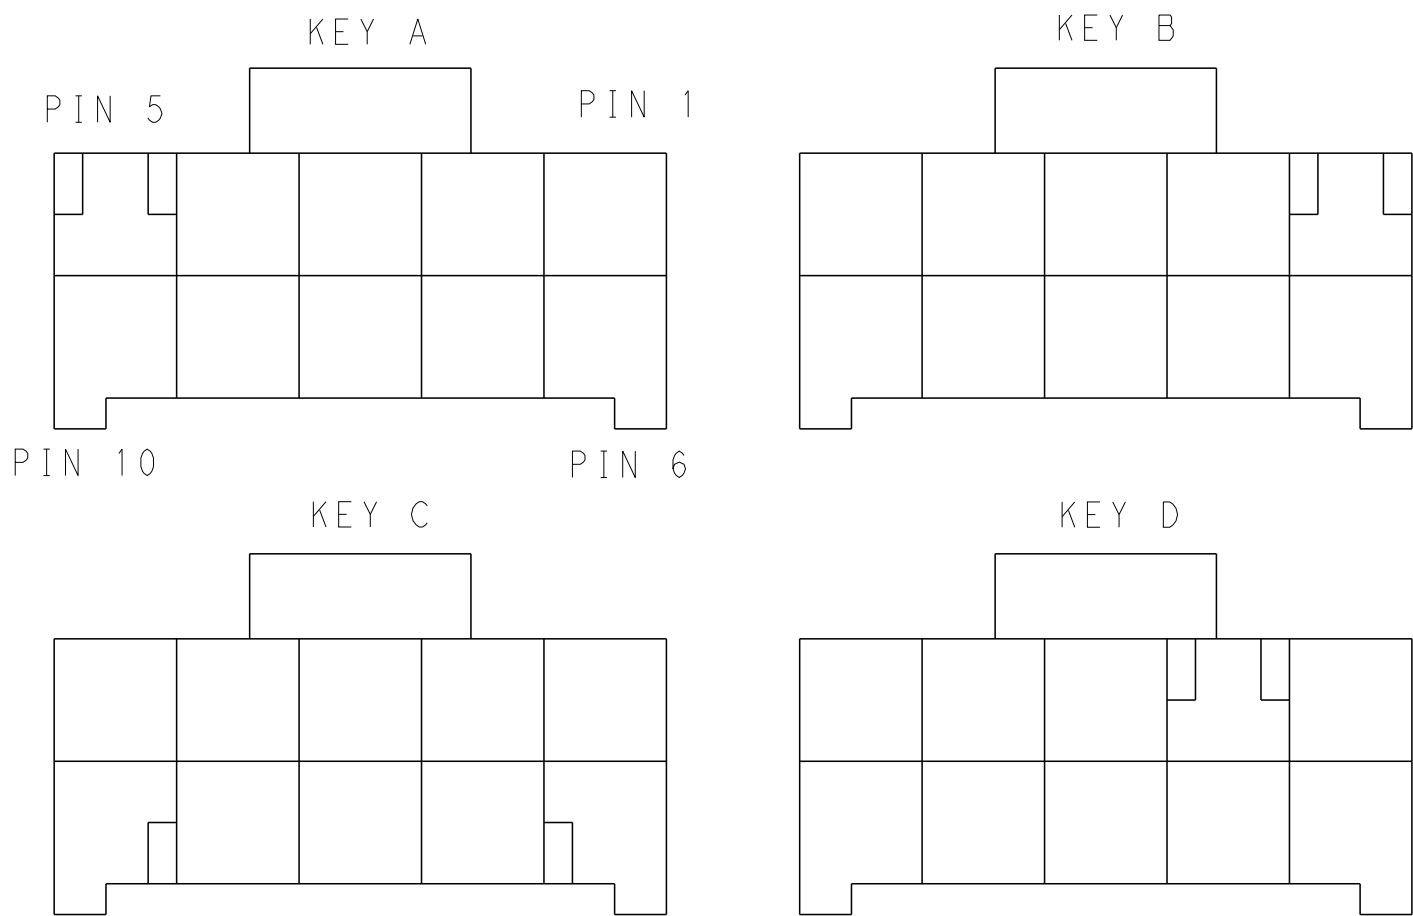


KEYING FOR 2*5 POS.

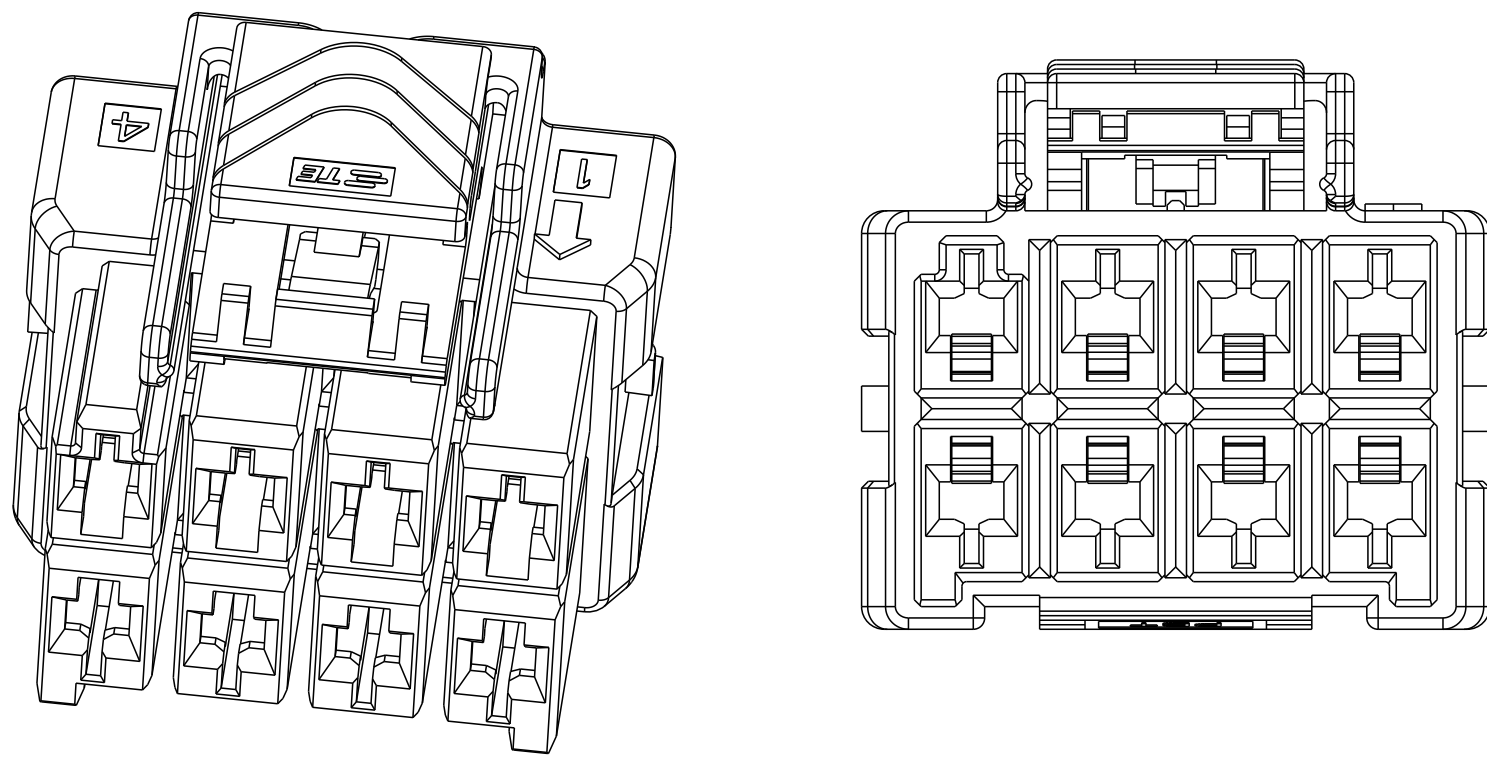


2*4 POSITIONS

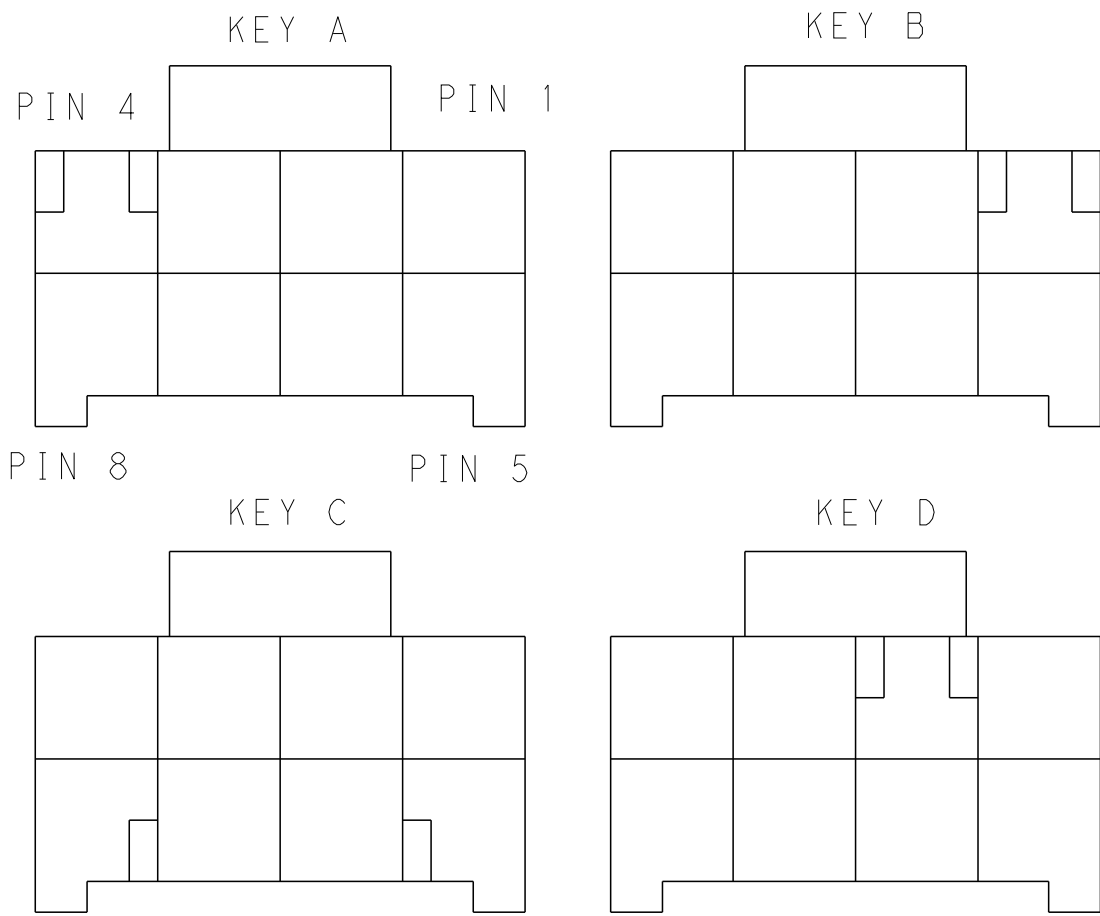

KEYING FOR 2*4 POS.

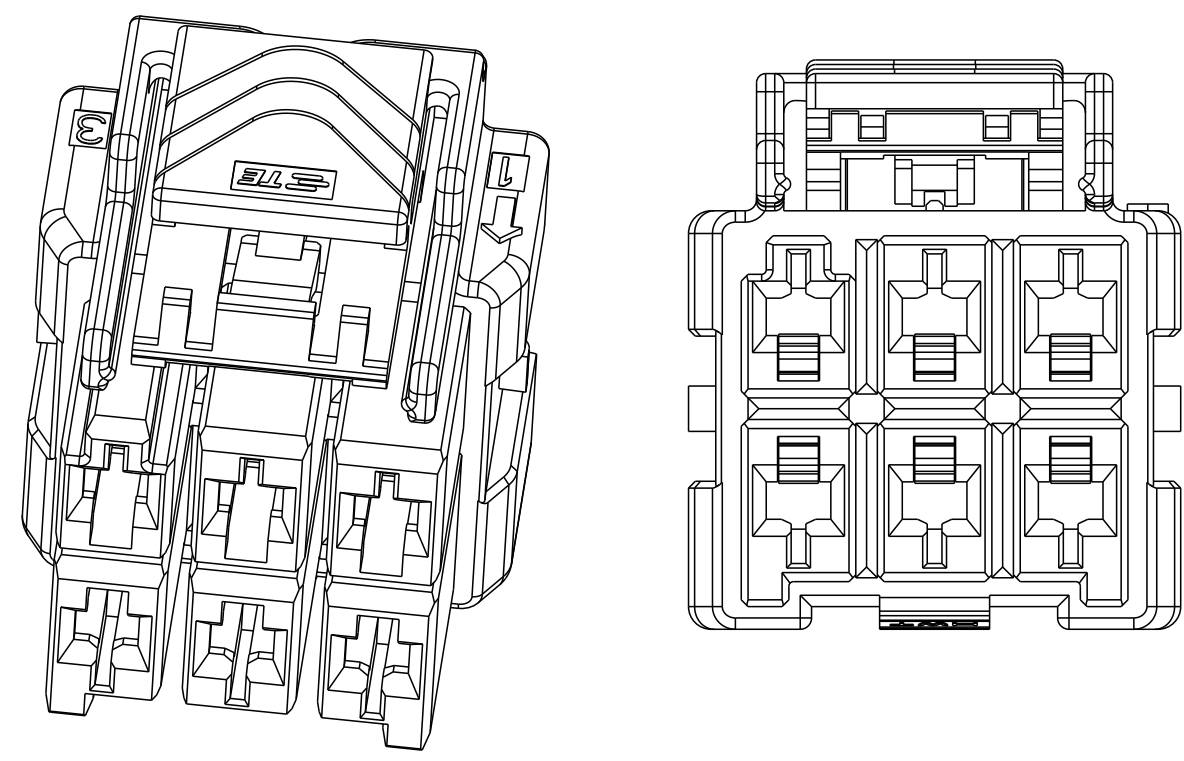


2*3 POSITIONS

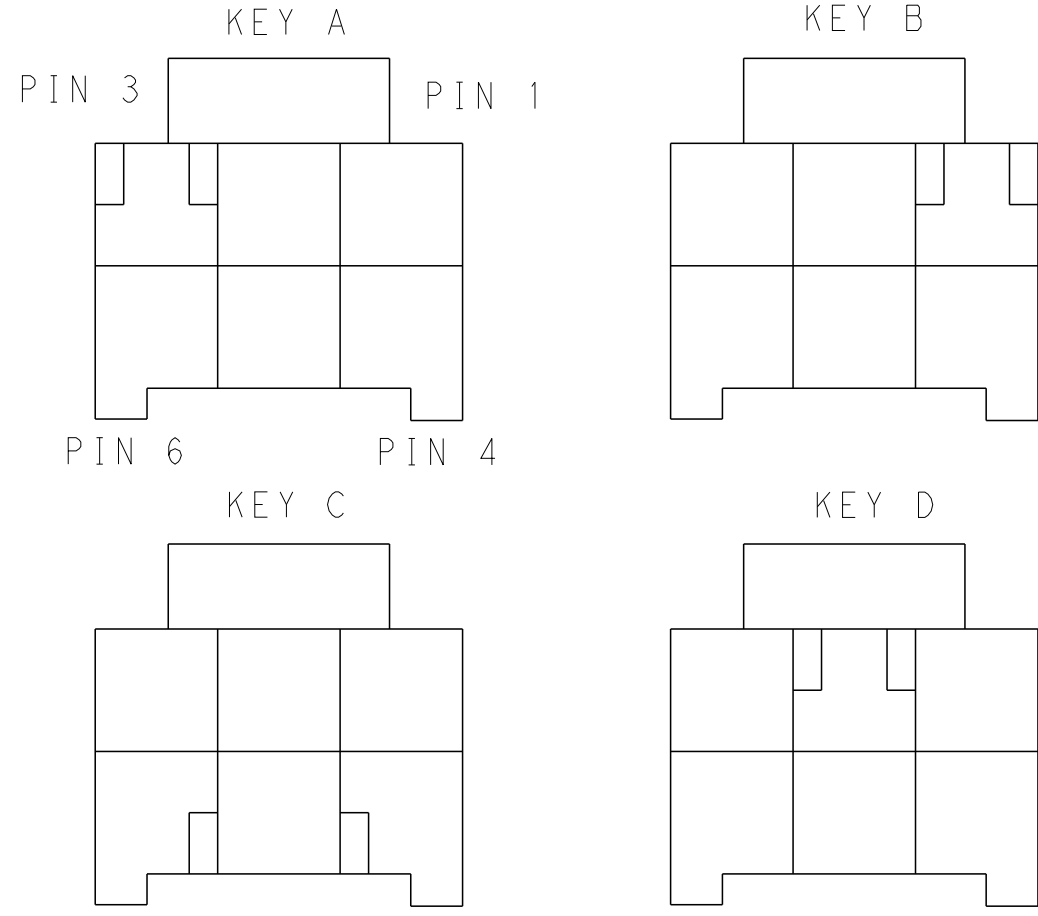


KEYING FOR 2*3 POS.

2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
	LEVEL 2	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
	LEVEL 2	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
	LEVEL 2	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
	LEVEL 2	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3
POS.	MATERIAL	KEY	P/N

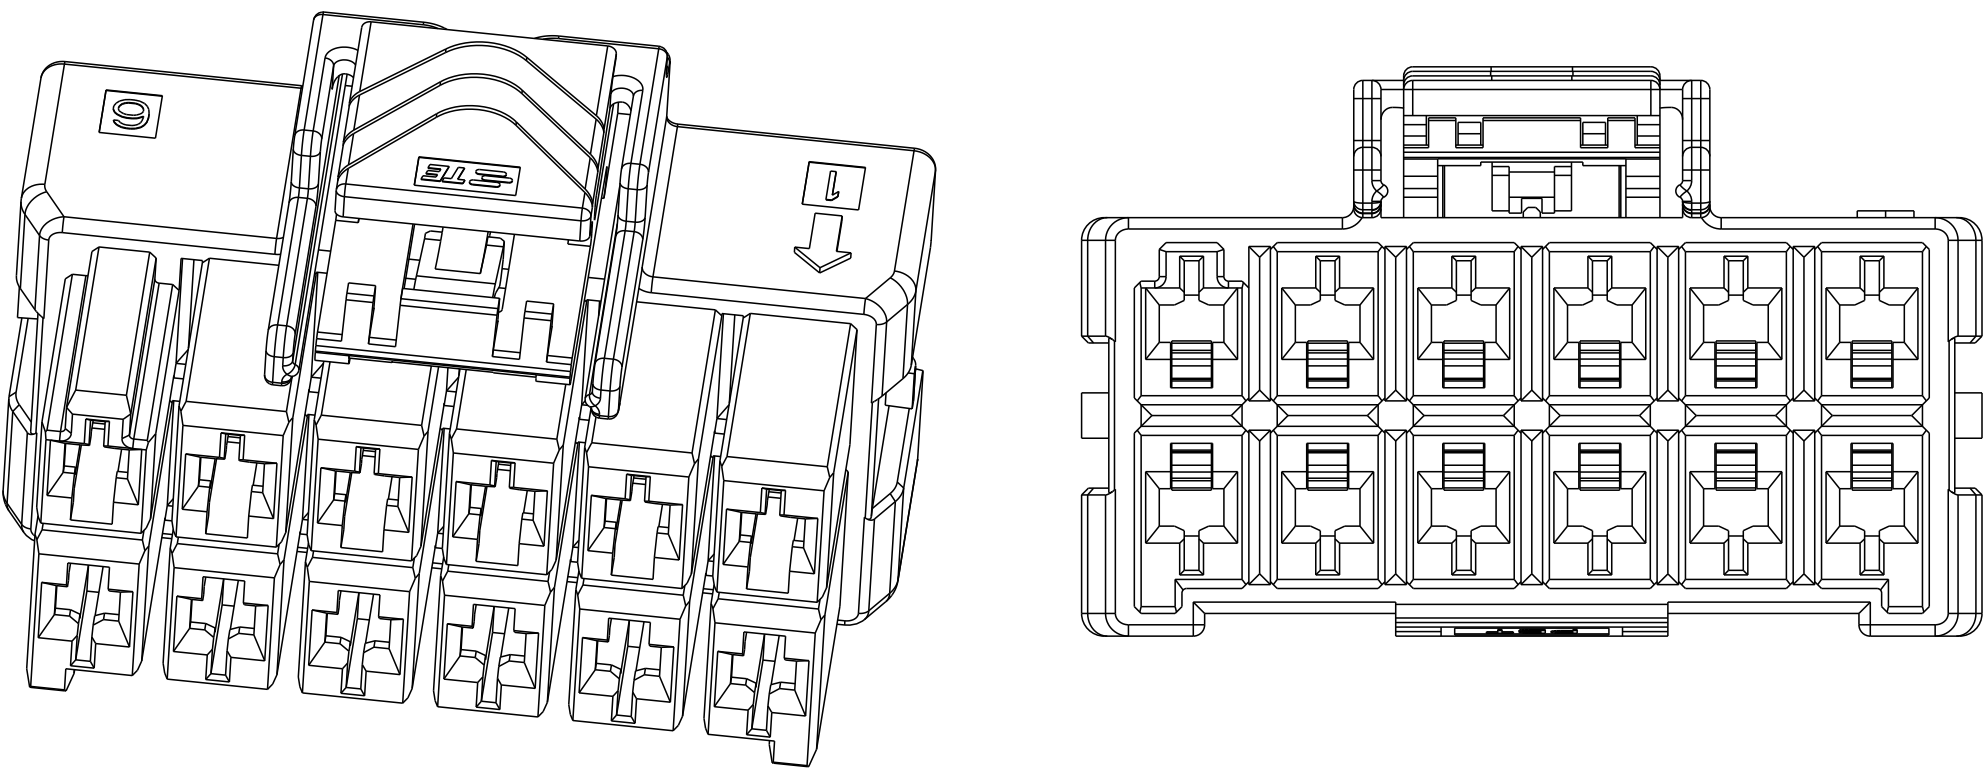

2*6 POSITIONS

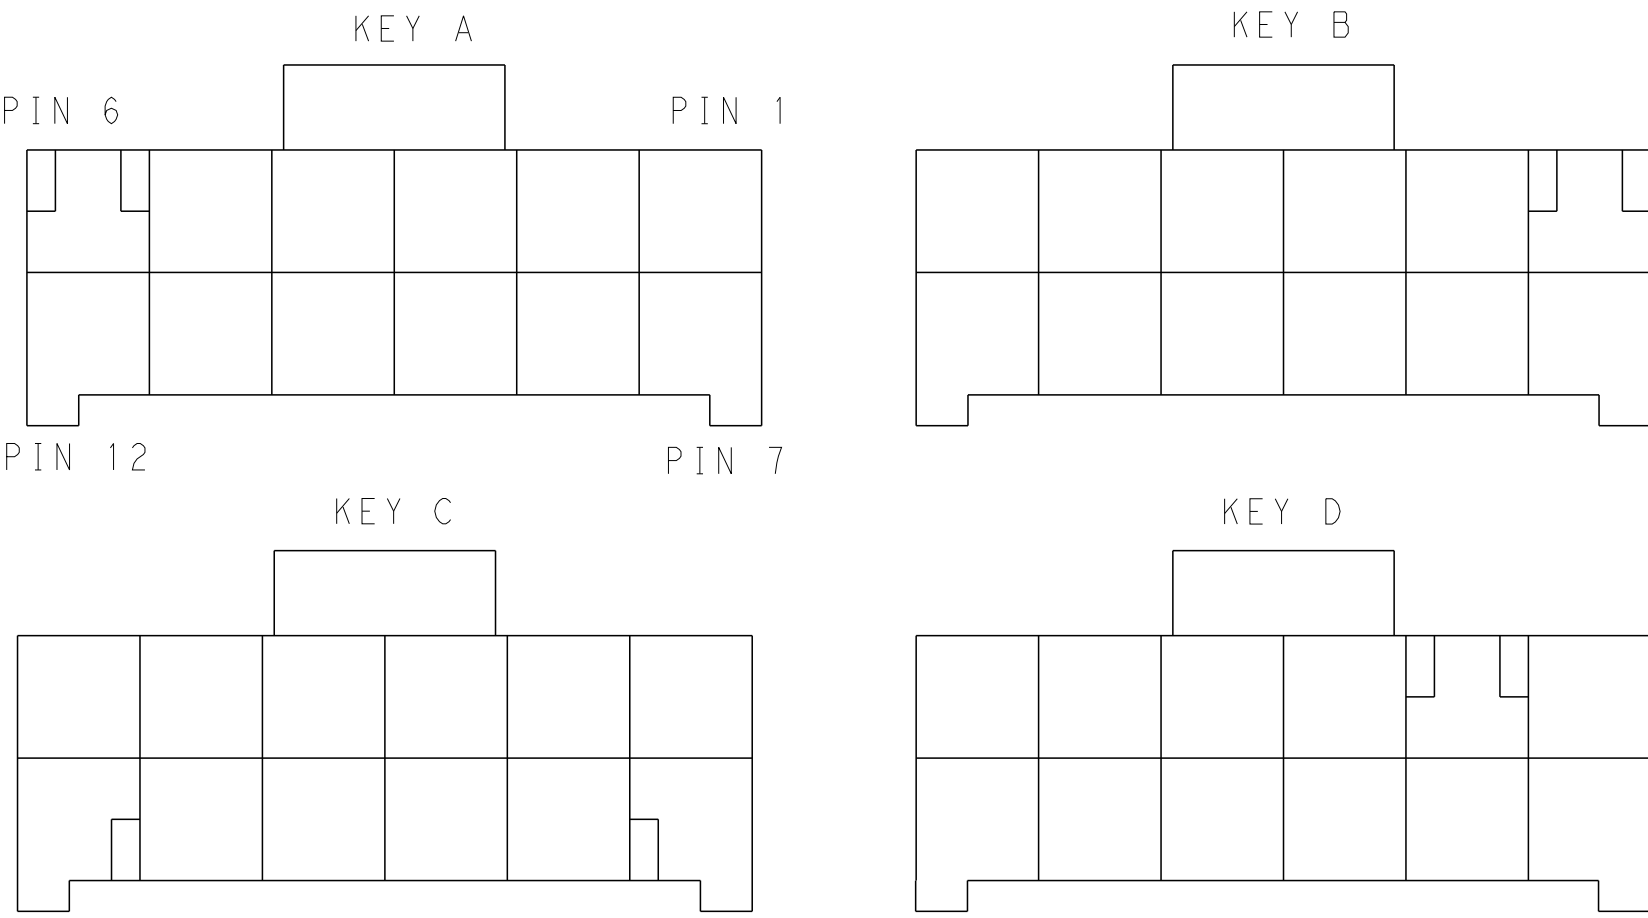

KEYING FOR 2*6 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	TE Connectivity PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK -				
		CHK HAPYE WU 09JUL2012					
		APVD YUZHONG MAO 09JUL2012					
		NAME					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
mm		0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ±		108-106118			
				APPLICATION SPEC			
				114-106118			
MATERIAL		FINISH		WEIGHT		SIZE	
-		-		-		A1 00779 C=1971776	
				Customer Drawing		RESTRICTED TO -	
				SCALE		5:1	
				SHEET		2 OF 2	
				REV		H1	