
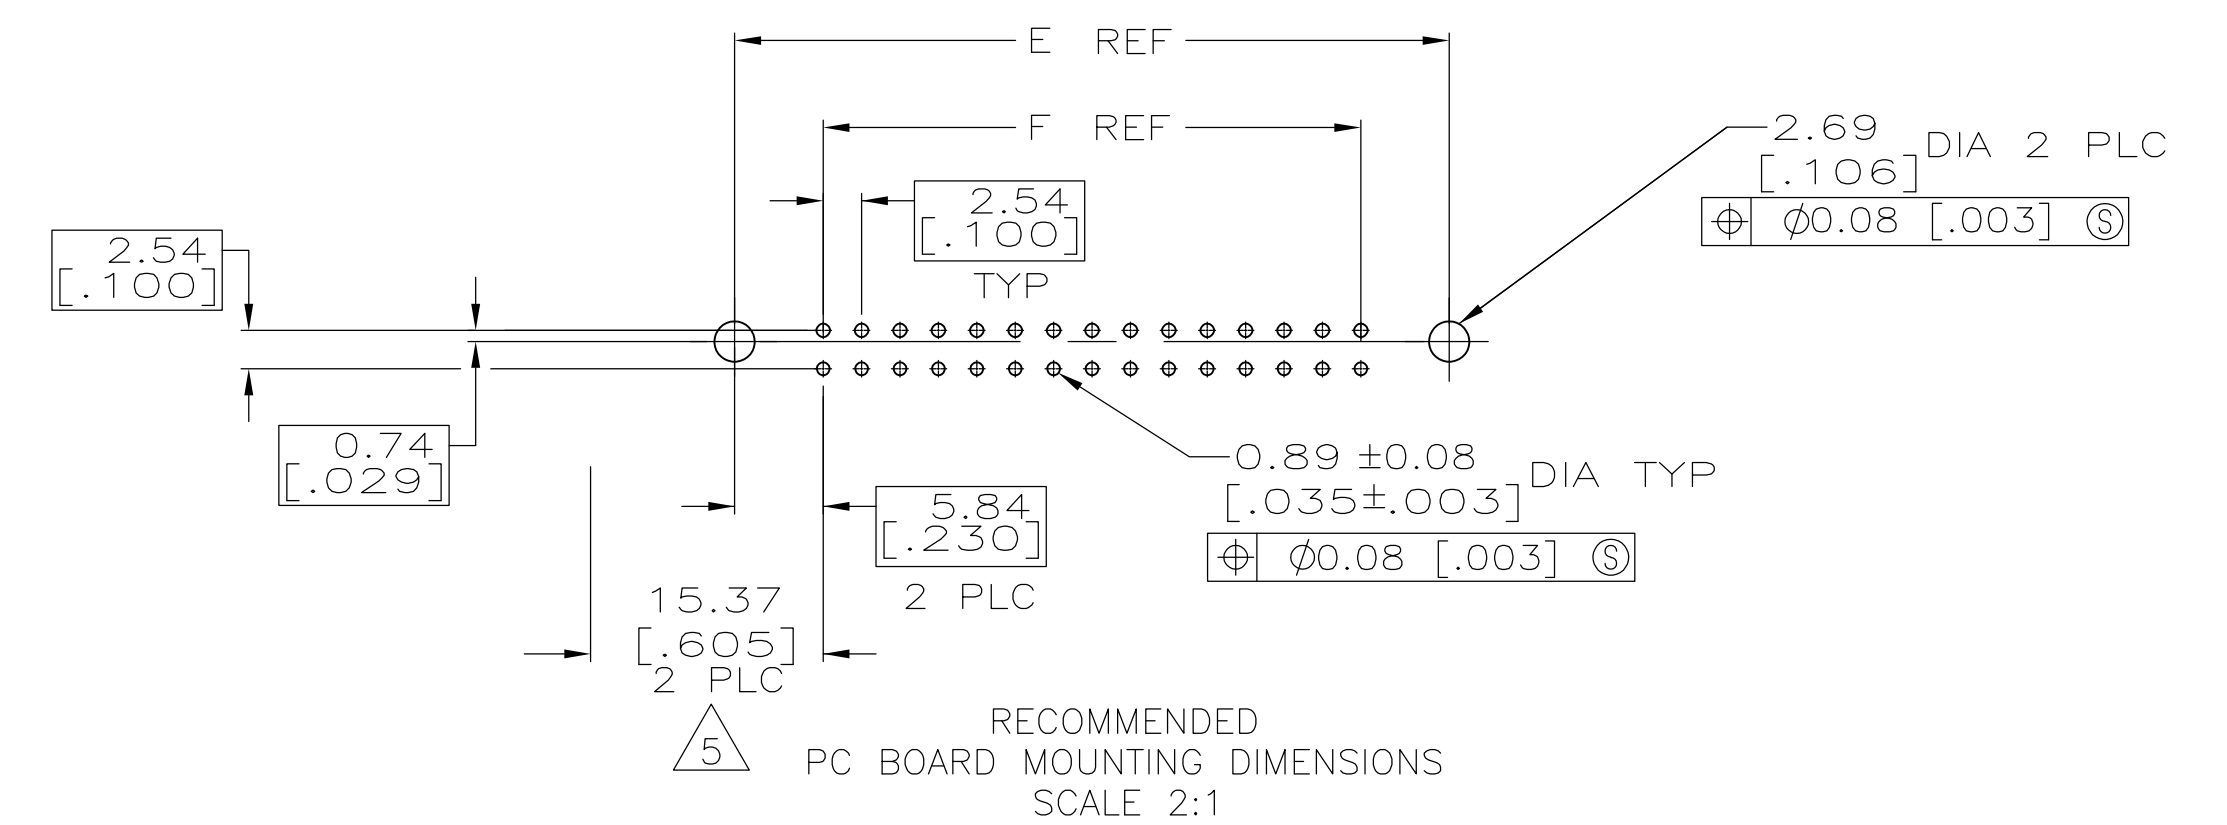




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 4-23-90 H:MOLL CHK 11-28-90 R:STONE APVD —		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.13[.005] 3 PLC ± — 4 PLC ± — FINISH UNLESS OTHERWISE SPECIFIED: ± —		NAME HEADER ASSY, UNIVERSAL, AMP-LATCH —	
		PRODUCT SPEC 108-40018 APPLICATION SPEC —		SIZE A1	
MATERIAL SEE SHEET 2		WEIGHT —		CAGE CODE 00779	
FINISH SEE SHEET 2		DRAWING NO C-499913		RESTRICTED TO —	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 2 REV J1	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

GP

00

REVISONS

DATE

DWN

APVD

DESCRIPTION

SEE SHEET 1

△1

COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.

△2

10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.

△3

10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.

4.

RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 1.57 [.062].

△5

DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.

△6

POSTS:
GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.38μm [.000015] MIN TOTAL ON THE LOCALIZED PLATE AREA,
2.54μm [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
1.27μm [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
OR
0.38μm [.000015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA,
2.54μm [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL,
1.27μm [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

△

MATERIAL:
HOUSING: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED, BLACK.
POSTS: BRASS.

OBSOLETE	53.34 [2.100]	65.02 [2.560]	65.02 [2.560]	75.18 [2.960]	71.12 [2.800]	60.96 [2.400]	44	1-499913-3
OBSOLETE	78.74 [3.100]	90.42 [3.560]	90.42 [3.560]	100.58 [3.960]	96.52 [3.800]	86.36 [3.400]	64	1-499913-2
	73.66 [2.900]	85.34 [3.360]	85.34 [3.360]	95.50 [3.760]	91.44 [3.600]	81.28 [3.200]	60	1-499913-1
	60.96 [2.400]	72.64 [2.860]	72.64 [2.860]	82.80 [3.260]	78.74 [3.100]	68.58 [2.700]	50	1-499913-0
	48.26 [1.900]	59.94 [2.360]	59.94 [2.360]	70.10 [2.760]	66.04 [2.600]	55.88 [2.200]	40	499913-9
	40.64 [1.600]	52.32 [2.060]	52.32 [2.060]	62.48 [2.460]	58.42 [2.300]	48.26 [1.900]	34	499913-8
	35.56 [1.400]	47.24 [1.860]	47.24 [1.860]	57.40 [2.260]	53.34 [2.100]	43.18 [1.700]	30	499913-7
	30.48 [1.200]	42.16 [1.660]	42.16 [1.660]	52.32 [2.060]	48.26 [1.900]	38.10 [1.500]	26	499913-6
	27.94 [1.100]	39.62 [1.560]	39.62 [1.560]	49.78 [1.960]	45.72 [1.800]	35.56 [1.400]	24	499913-5
	22.86 [.900]	34.54 [1.360]	34.54 [1.360]	44.70 [1.760]	40.64 [1.600]	30.48 [1.200]	20	499913-4
	17.78 [.700]	29.46 [1.160]	29.46 [1.160]	39.62 [1.560]	35.56 [1.400]	25.40 [1.000]	16	499913-3
	15.24 [.600]	26.92 [1.060]	26.92 [1.060]	37.08 [1.460]	33.02 [1.300]	22.86 [.900]	14	499913-2
	10.16 [.400]	21.84 [.860]	21.84 [.860]	32.00 [1.260]	27.94 [1.100]	17.78 [.700]	10	499913-1
	F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

4-23-90

H. MOLL

11-28-90

R. STONE

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± 0.13[.005]

3 PLC ± -

4 PLC ± -

ANGLES

FINISH

7

6

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-40018

APPLICATION SPEC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

WEIGHT

A1 00779

499913

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV J1

TE Connectivity

HEADER ASSY, UNIVERSAL, AMP-LATCH

4805 (3/11)