



© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	ECR-25-239014	16APR2025	ABS	PS

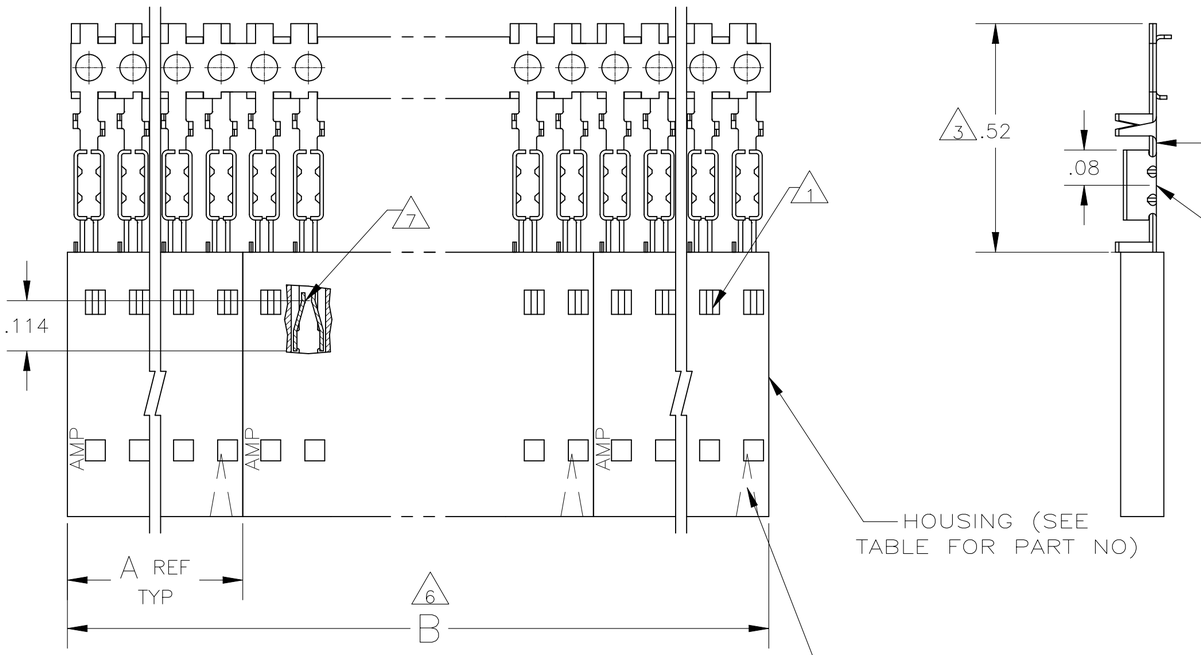

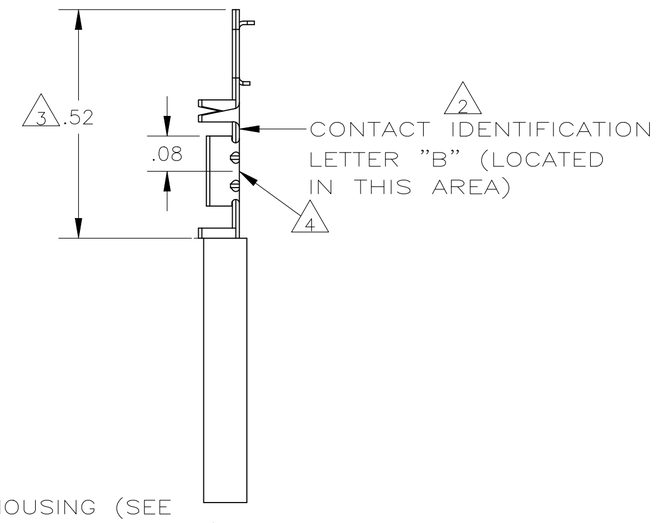



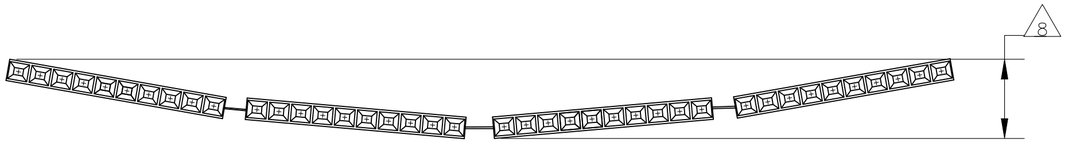

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

1. CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
2. USE WITH #22–#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
3. THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
4. POINT OF MEASUREMENT FOR PLATING THICKNESS
5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103686
6. ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
7. POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
8. MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED.055.
9. FINISH : CONTACTS : .000015 GOLD IN THE CONTACT AREA, .000050–.000100 BRIGHT TIN–LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
10. FINISH : CONTACTS : .000015 GOLD IN THE CONTACT AREA, .000050–.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
11. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
OBSOLETE	10	2	2.40	1.198	1–103688–1	12	6–103975–1
OBSOLETE	10	2	2.20	1.098	1–103688–0	11	6–103975–0
	10	2	2.00	.998	103688–9	10	5–103975–9
OBSOLETE	10	2	1.80	.898	103688–8	9	5–103975–8
11 OBSOLETE	10	2	1.60	.798	103688–7	8	5–103975–7
OBSOLETE	10	2	1.40	.698	103688–6	7	5–103975–6
OBSOLETE	10	4	2.39	.598	103688–5	6	5–103975–5
	10	4	1.99	.498	103688–4	5	5–103975–4
OBSOLETE	10	5	1.99	.398	103688–3	4	5–103975–3
OBSOLETE	10	8	2.40	.298	103688–2	3	5–103975–2
	10	10	2.00	.198	103688–1	2	5–103975–1
OBSOLETE	9	2	2.40	1.198	1–103688–1	12	1–103975–1
OBSOLETE	9	2	2.20	1.098	1–103688–0	11	1–103975–0
SUPERSEDED BY 5–103975–9	9	2	2.00	.998	103688–9	10	103975–9
11 OBSOLETE	9	2	1.80	.898	103688–8	9	103975–8
11 OBSOLETE	9	2	1.60	.798	103688–7	8	103975–7
	9	2	1.40	.698	103688–6	7	103975–6
OBSOLETE	9	4	2.39	.598	103688–5	6	103975–5
SUPERSEDED BY 5–103975–4	9	4	1.99	.498	103688–4	5	103975–4
OBSOLETE	9	5	1.99	.398	103688–3	4	103975–3
OBSOLETE	9	8	2.40	.298	103688–2	3	103975–2
SUPERSEDED BY 5–103975–1	9	10	2.00	.198	103688–1	2	103975–1

103975

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± .02
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, CONTACTS: PHOS BRONZE

FINISH: SEE TABLE

DWN L.MAYER 29 SEPT 86
CHK P.C.DEJONG 12 NOV 86
APVD P.C.DEJONG 12 NOV 86
PRODUCT SPEC 108–25034
APPLICATION SPEC 114–25026
WEIGHT –

TE Connectivity

NAME: ASSY, AMPMODU MTE, RECEPTACLE, SINGLE ROW, .100 C/L, FOR NO 22–NO 26 AWG WIRE SIZE, STRIP FORM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-103975	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV H3