

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
-	-


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-21-100678	08APR2021	SS	VS
	C1	REVISED PER ECR-22-144223	13JUN2022	PJ	VS
	D	REVISED PER ECR-23-219171	29JUN2023	MC	DS

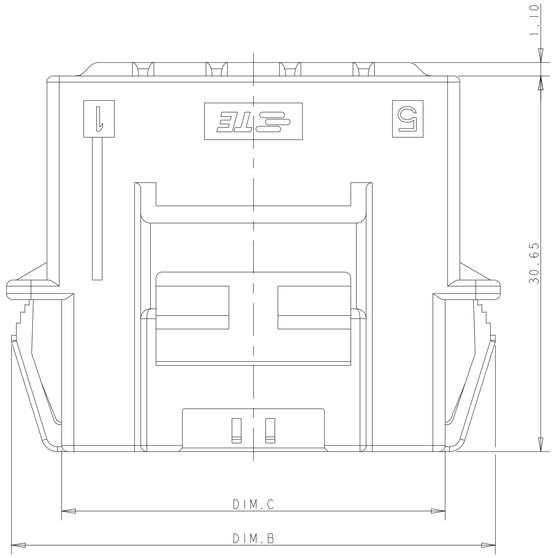


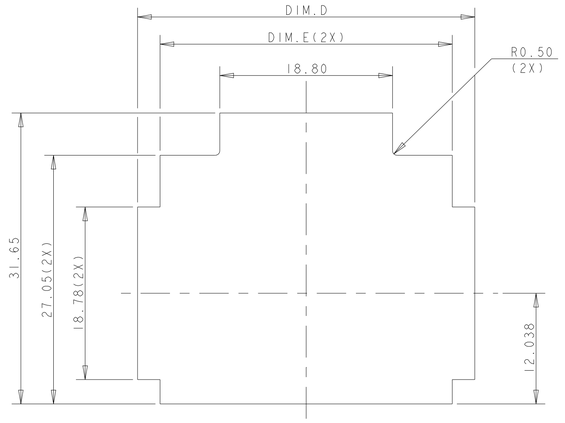



RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*5 AND 3*4 POSITIONS
(TOLERANCE: ±0.15mm)

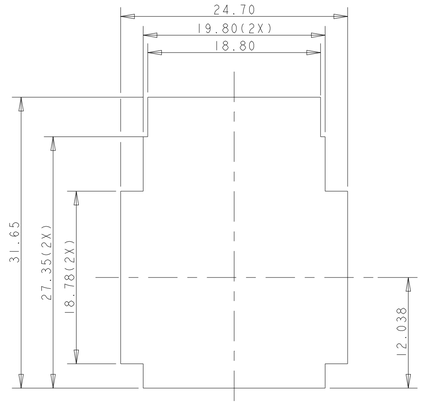


RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*3 POSITION
(TOLERANCE: ±0.15mm)

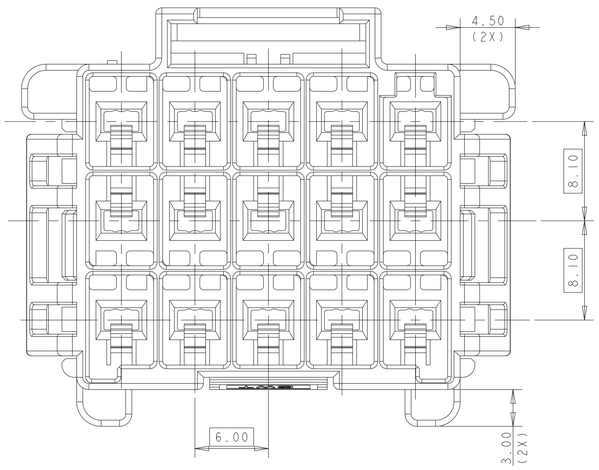

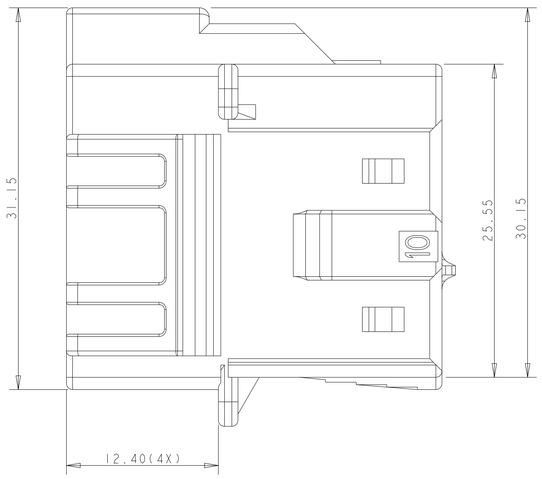

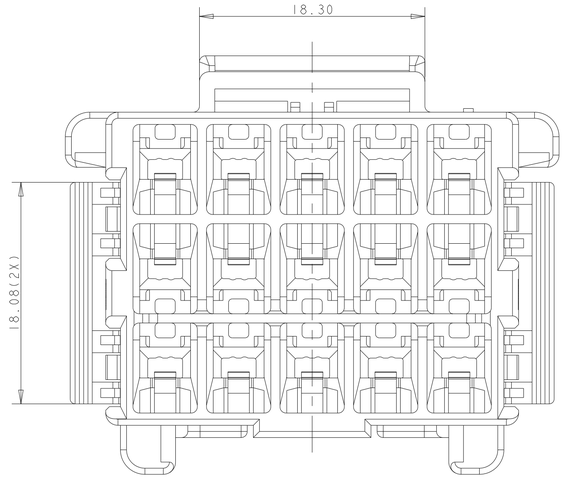

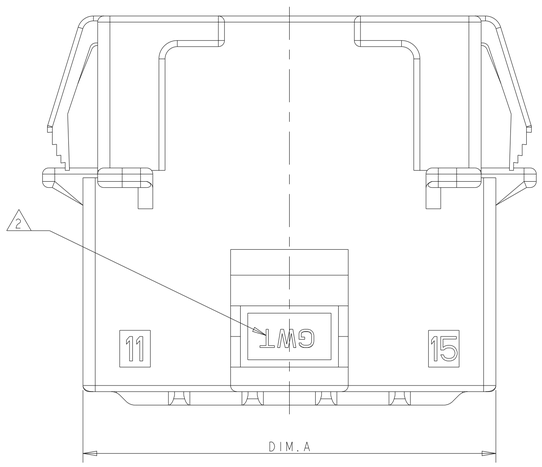

NOTE

1. MATERIAL:
   LEVEL A: PA66 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
   LEVEL B: PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:
   LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
   TAB CONTACT:1971238/1971780/82/84/86/88-*

4. MATING CONN, P/N
   PLUG HSG:*-2232357-*
   TPA DOUBLE ROW:*-1971778-*; TPA SINGLE ROW:*-1971777-*

5. RECOMMENDED PANEL THICKNESS:1.0~2.0mm

POS	A	B	C	D	E
3*5	33.70	39.5	31.30	36.70	31.80
3*4	27.70	33.5	25.30	30.70	25.80
3*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -

FINISH - -

DWN	TOMMY WU	26MAR2013
CHK	HAPYE WU	26MAR2013
APVD	YUHONG MAO	26MAR2013

TE Connectivity

NAME: CAP HOUSING,PANEL MOUNT,TRIPLE ROW POWER TRIPLE LOCK

PRODUCT SPEC: 108-106118
APPLICATION SPEC: 114-106118
WEIGHT: -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2232356	-


Customer Drawing | SCALE 4:1 | SHEET 1 OF 2 | REV D


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
-	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

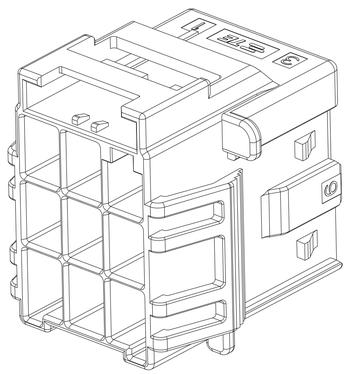





3*3 POSITIONS

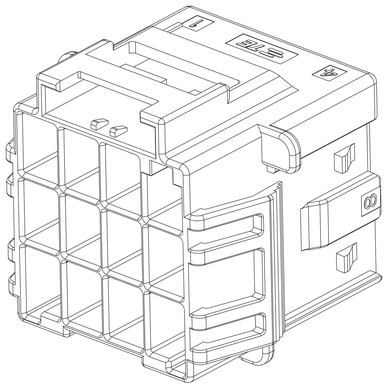




3*4 POSITIONS

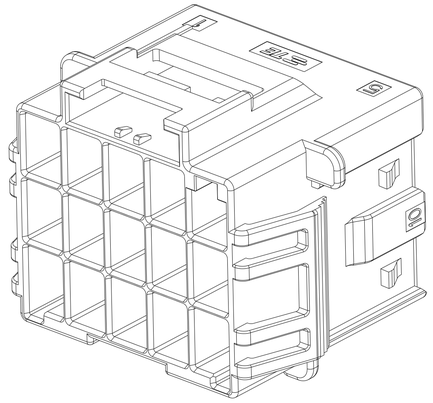


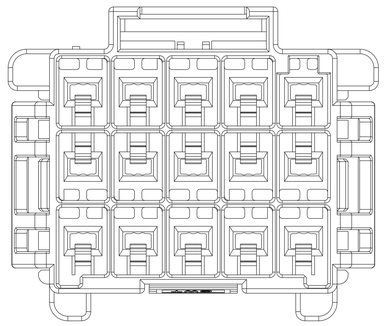


3*5 POSITIONS

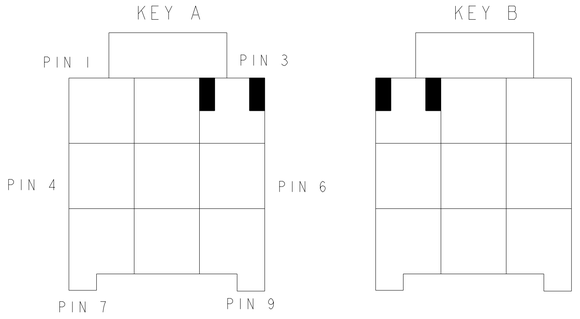

KEYING FOR 3*3 POS.

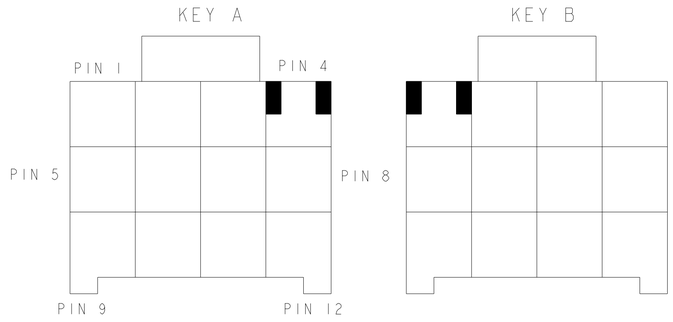

KEYING FOR 3*4 POS.

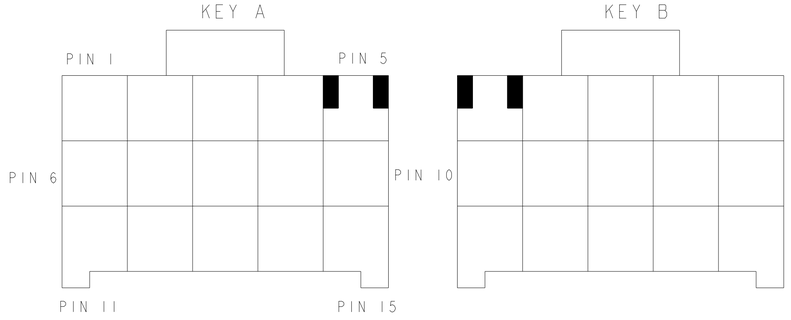

KEYING FOR 3*5 POS.

POS.	MATERIAL	COLOR	KEY	P/N
3*5	LEVEL A	DARK GREY	KEY A	5-2232356-7
		BROWN	KEY B	6-2232356-7
		GREEN	KEY C	7-2232356-7
		ORANGE	KEY D	8-2232356-7
	LEVEL B	BLACK	KEY A	1-2232356-5
3*4	LEVEL A	DARK GREY	KEY A	5-2232356-4
		BROWN	KEY B	6-2232356-4
		GREEN	KEY C	7-2232356-4
		ORANGE	KEY D	8-2232356-4
3*3	LEVEL A	DARK GREY	KEY A	5-2232356-3
		BROWN	KEY B	6-2232356-3
		GREEN	KEY C	7-2232356-3
		ORANGE	KEY D	8-2232356-3
	LEVEL B	BLACK	KEY A	1-2232356-6

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -
FINISH - -

DWN TOMMY WU 26MAR2013
CHK HAPYE WU 26MAR2013
APVD YUHONG MAO 26MAR2013
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME CAP HOUSING, PANEL MOUNT, TRIPLE ROW POWER TRIPLE LOCK
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2232356	-

Customer Drawing | SCALE - | SHEET 2 OF 2 | REV D