




REVISIONS					
P	T	LTR	DESCRIPTION	DATE	DWN APVD
	T		REVISED PER ECR-24-213594	02JUL2024	RK FJS

D

C

B

A

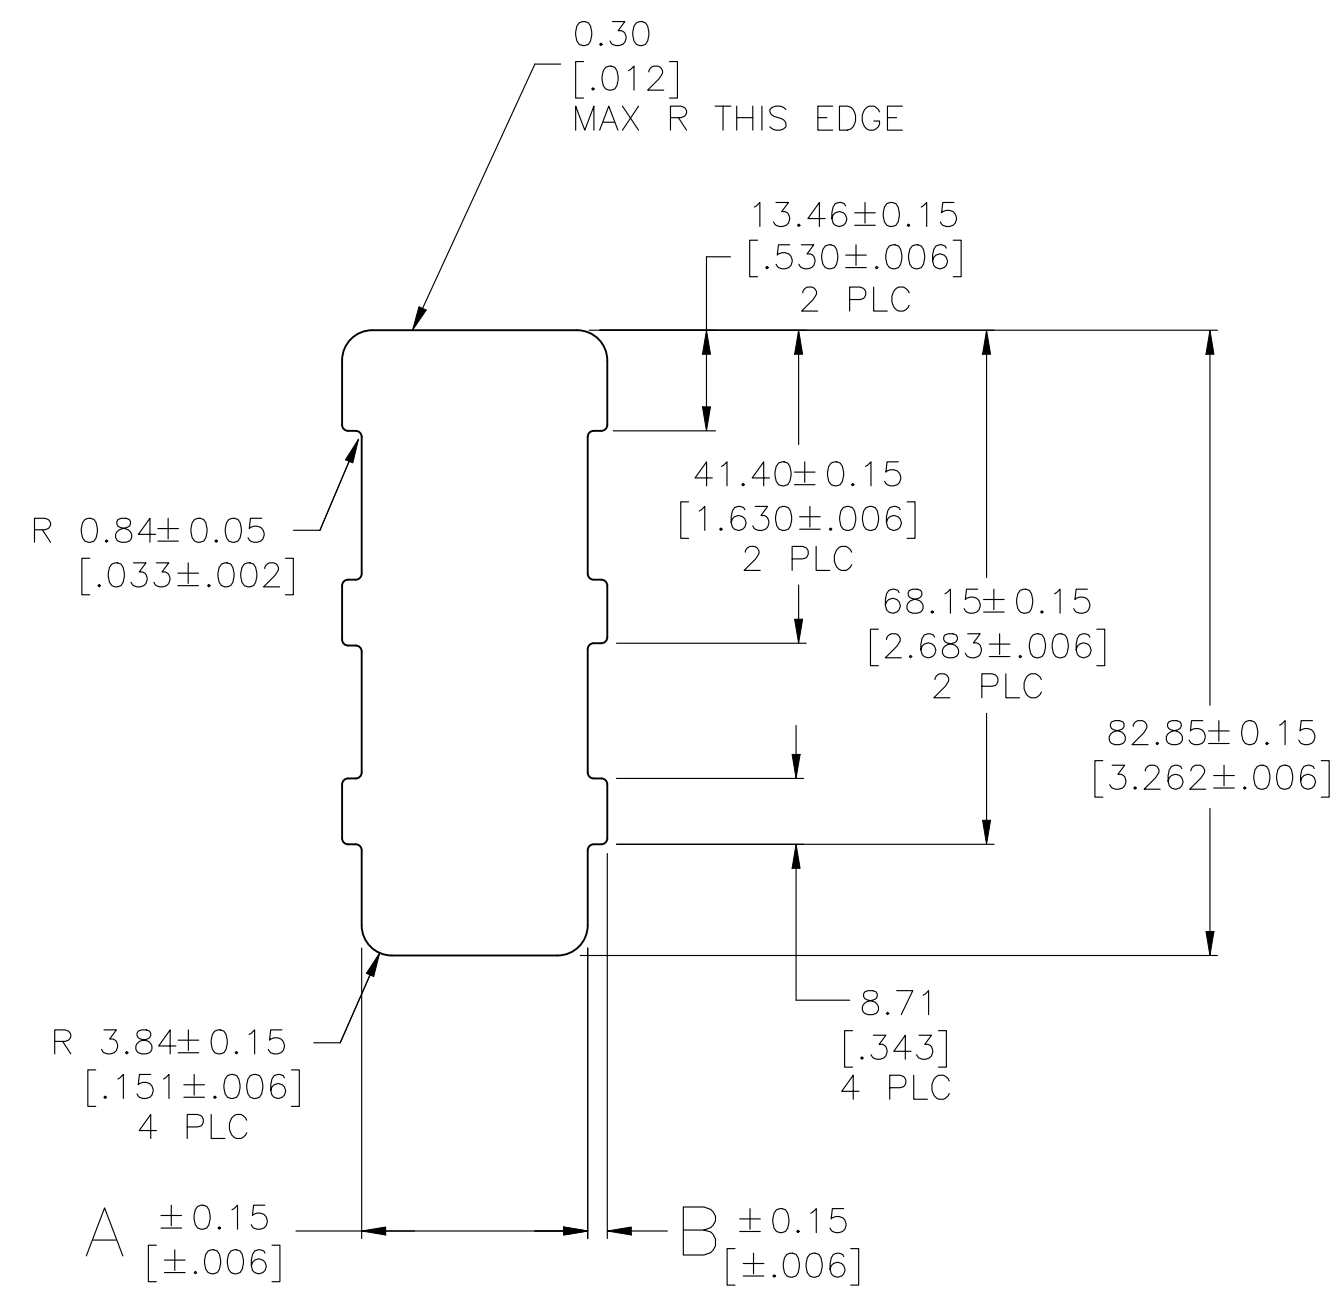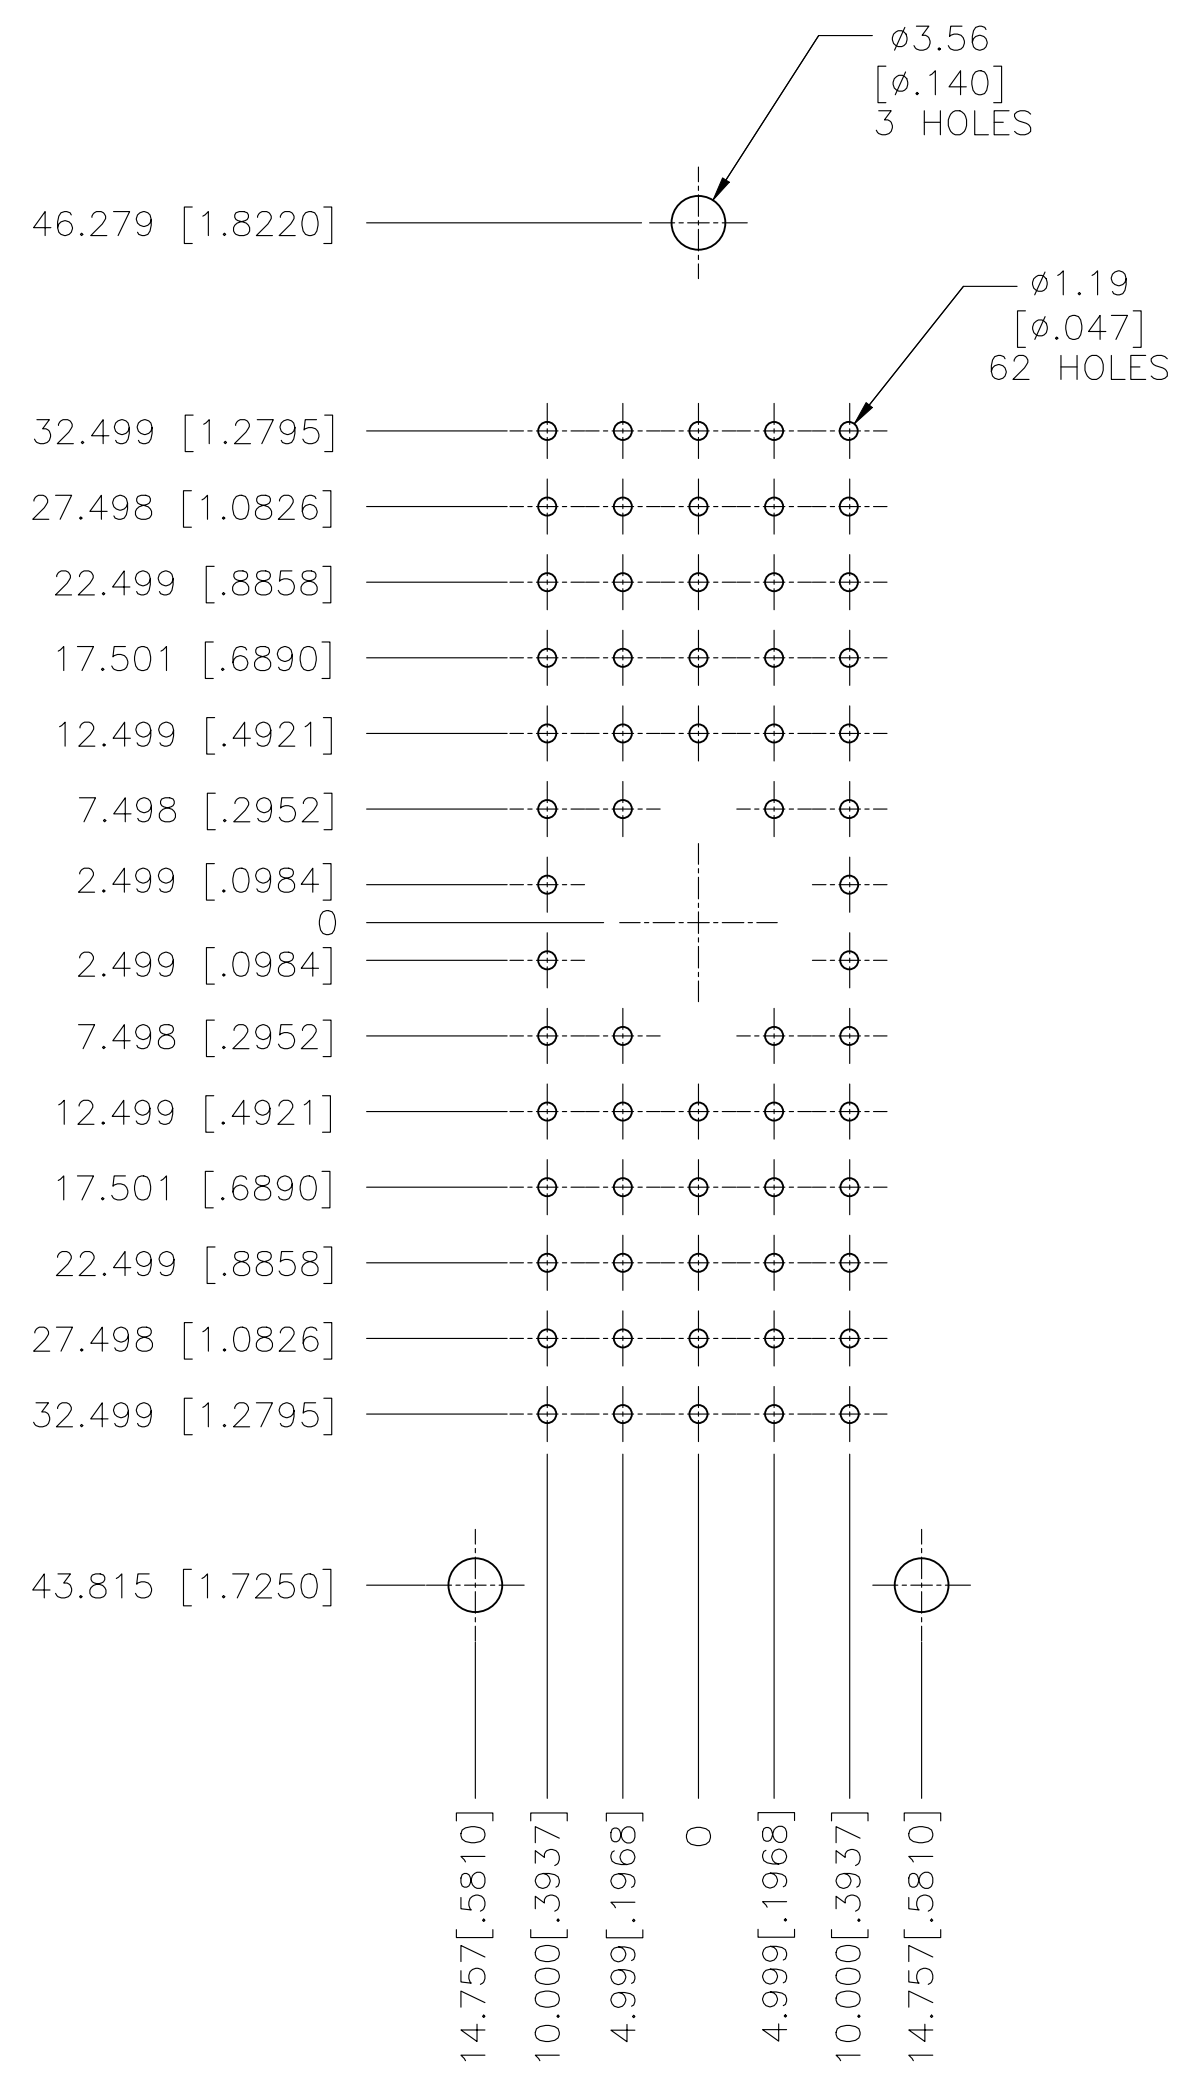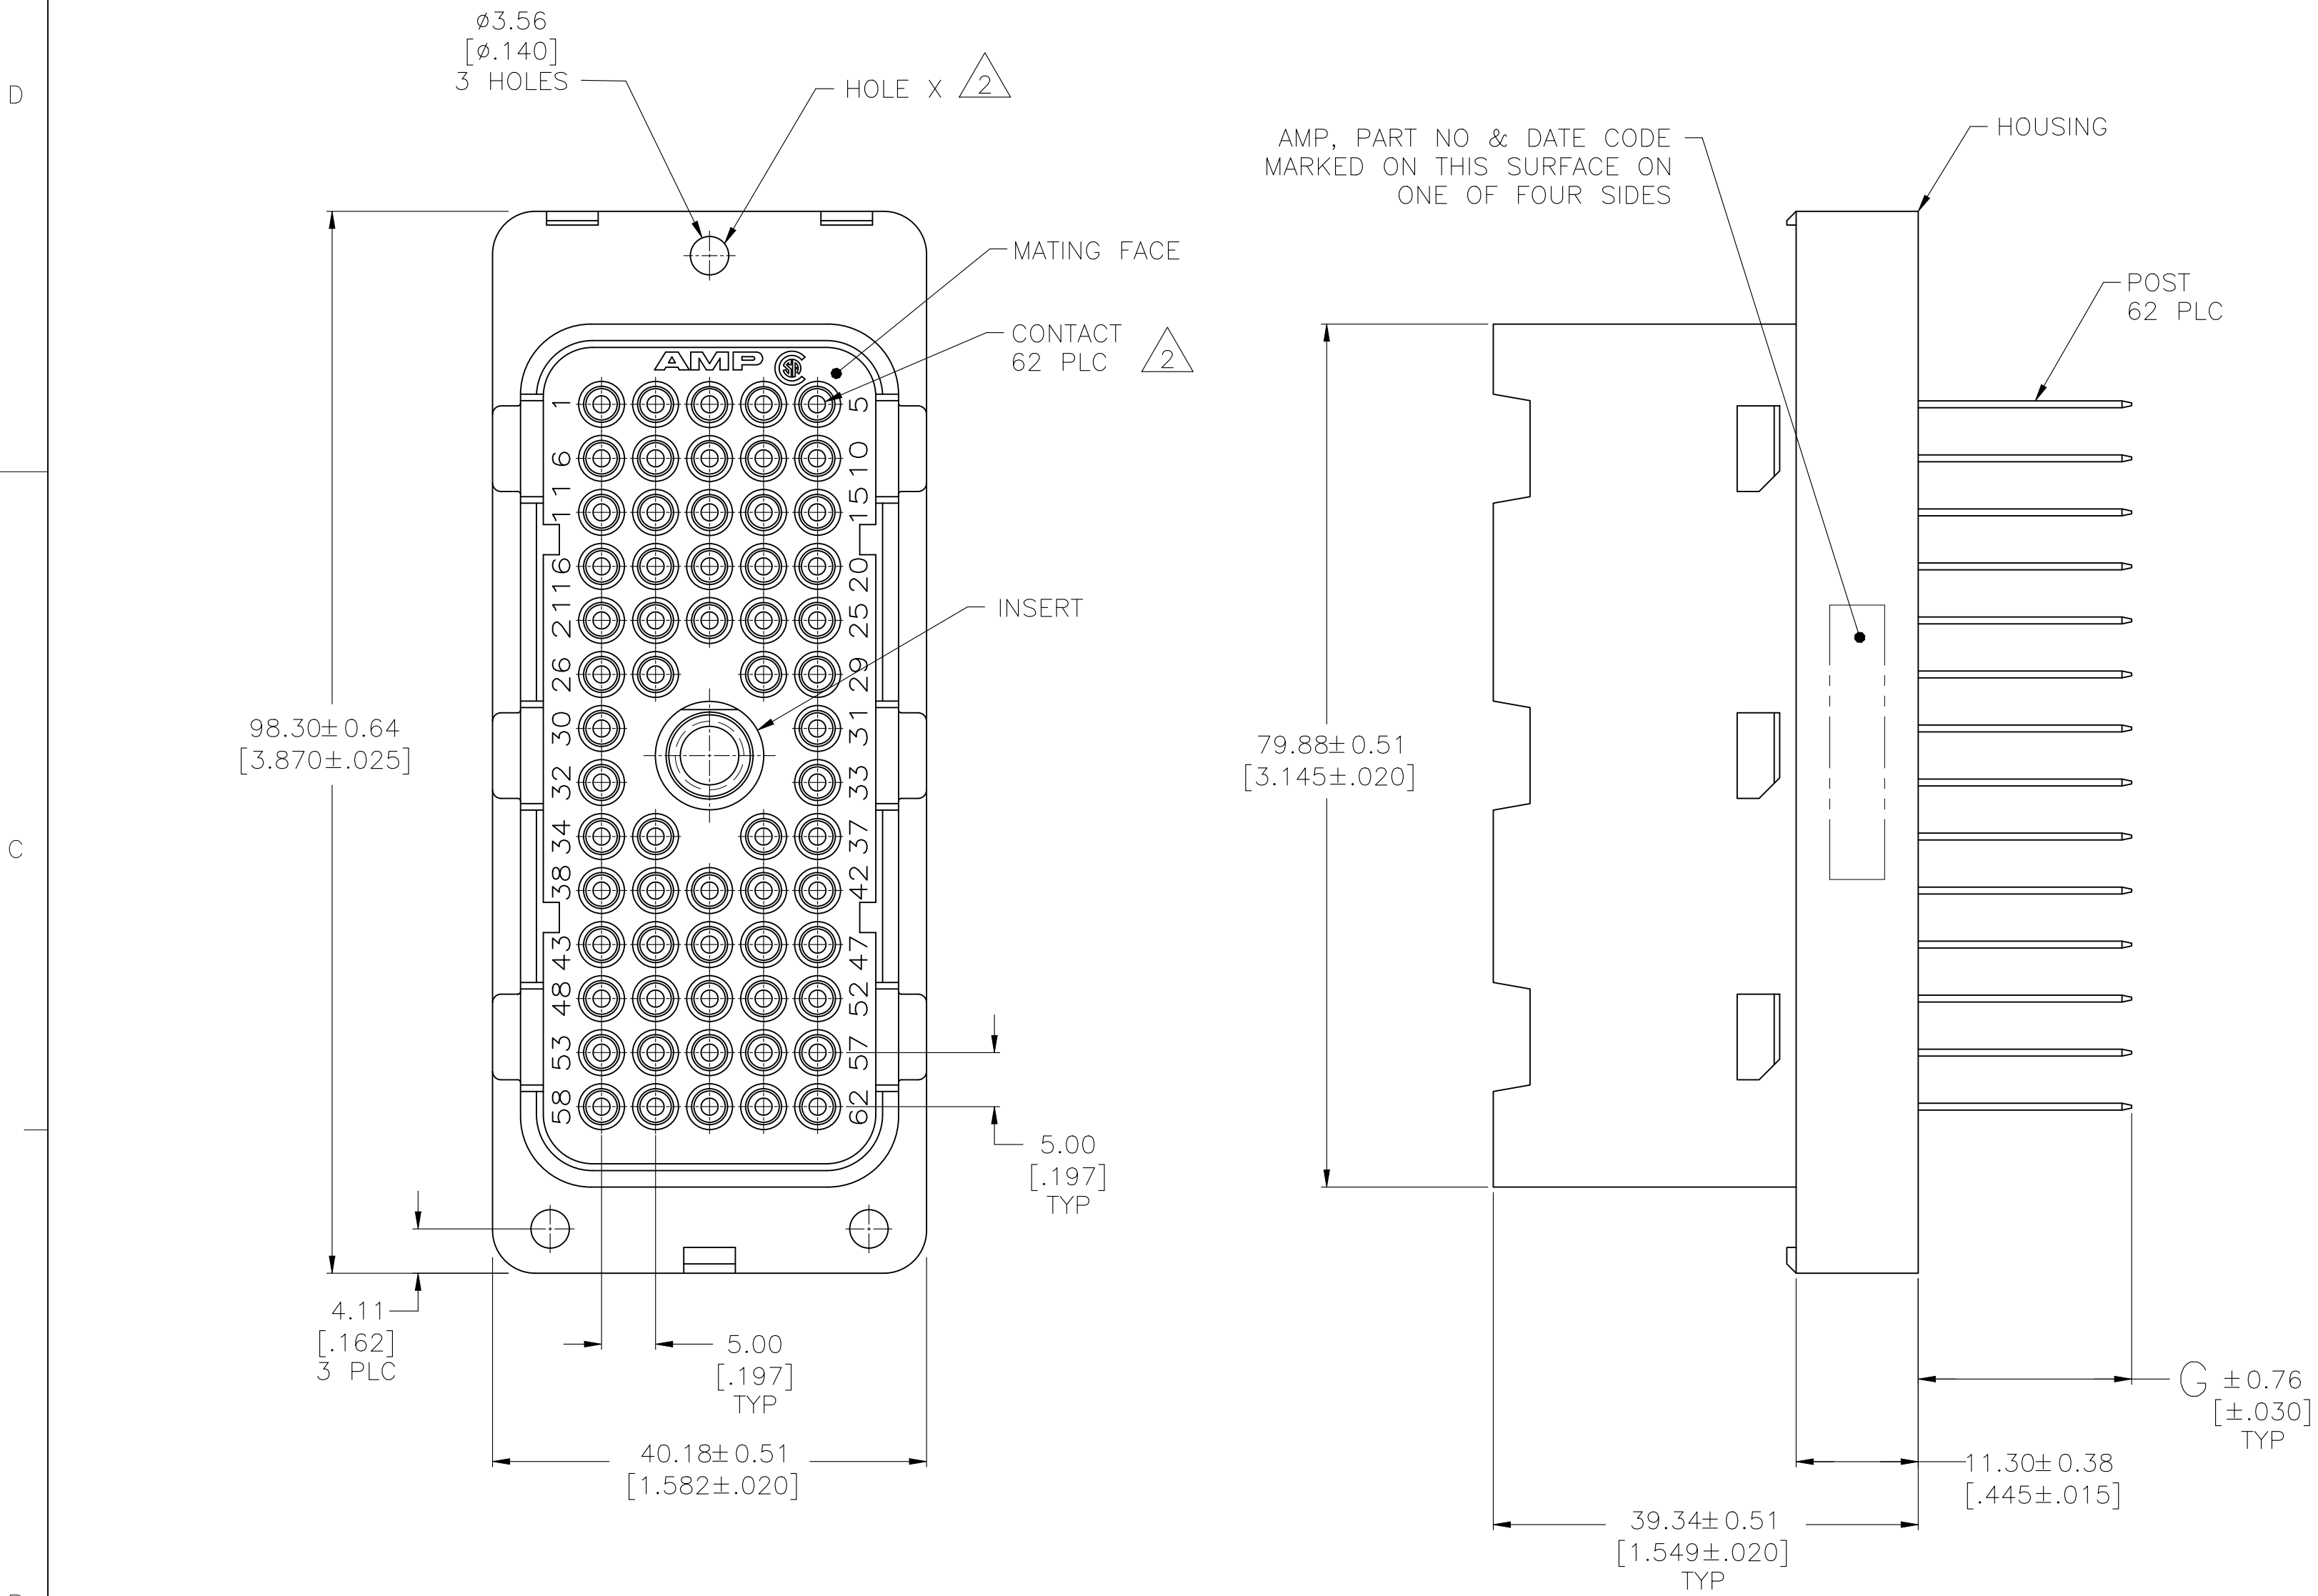

RECOMMENDED PANEL CUTOUT $\triangle 1$
SCALE 1:1

RECOMMENDED PC BOARD LAYOUT

- $\triangle 1$ PANEL CUTOUT FOR REAR MOUNTED PIN BLOCK.
- $\triangle 2$ SEAMS OF ALL PINS TO BE ORIENTED TOWARD HOLE X SIDE.
- $\triangle 3$ POLYESTER, BLACK.
- $\triangle 4$ 0.76 μ m [.000030] MIN PRECIOUS METAL PLATE FOR A LENGTH OF 6.35 [.250] MIN FROM MATING END, GOLD FLASH ON REMAINDER, BOTH OVER 1.27 μ m [.000050] MIN NICKEL PER QQ-N-290.
- $\triangle 5$ 2.54 μ m [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER 2.54 μ m [.000100] MIN COPPER PER MIL-C-14550.
- $\triangle 6$ 2.54 μ m [.000100] MIN TIN PER MIL-T-10727 OVER 2.54 μ m [.000100] MIN COPPER PER MIL-C-14550.
- $\triangle 7$ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1.75 [.069]	32.36 [1.274]	1.40-1.98 [.055-.078]
2.74 [.108]	30.05 [1.183]	0.79-1.40 [.031-.055]
B	A	PANEL THICKNESS

OBSOLETE	$\triangle 5$	$\triangle 4$	5.59 [.220]	211580-6
	$\triangle 6$	$\triangle 4$	3.56 [.140]	211580-5
OBSOLETE	$\triangle 5$	$\triangle 4$	19.76 [.778]	211580-4
	$\triangle 5$	$\triangle 4$	3.56 [.140]	211580-3
OBSOLETE	$\triangle 5$	$\triangle 4$	19.76 [.778]	211580-2
	POST FINISH	CONTACT FINISH	G	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09/09/92	L.SIPE	
DIMENSIONS: mm (INCHES)		CHK 10-15-92	R.STONE	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
		0 PLC ± -		
		1 PLC ± -		
		2 PLC ± 0.13 [.005]		
		3 PLC ± 0.013 [.0005]		
		4 PLC ± -		
		ANGLES ± -		
		FINISH ± -		
MATERIAL		WEIGHT -	SIZE CAGE CODE DRAWING NO	
			A1 00779 C=211580	
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV T

TE Connectivity

CONNECTOR BLOCK FOR PINS WITH FEMALE JACKSCREW THREAD, 62 POSN, METRIMATE